

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by regressed opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended and recessed trimless installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED VECTOR2+

Enter the Product Code into the boxes above.

SIZE

_____ Feet

SOURCE

- ☐ 5W/Ft LED
- ☐ 7W/Ft LED
- ☐ 10W/Ft LED

RADIANCE

- ☐ DD - Direct (100%Down)
- ☐ UD - Uneven(70%Down/30%Up)**

*Light Distribution.
 **Suspended Configuration only.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*

*Not available for all configurations.

DRIVER

- ☐ ST - Standard
- ☐ DL - 0-10V Dimming (1%)
- ☐ DA - DALI
- ☐ *
- ☐ EC - Emergency Circuit
- ☐ EM - Emergency**

* Please specify dimming method (ELV).
 **Battery Pack per 4Feet section.

MOUNTING

- ☐ S4-Suspension 4Feet
- ☐ S6-Suspension 6Feet
- ☐ S Feet*
- ☐ WM - Wall Mount
- ☐ WF - Wall Flush
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless

*Please specify required Length.

LENS

- ☐ OR - Opal Regressed

FINISH

- ☐ WH - White
- ☐ BK - Black
- ☐ GR - Grey
- ☐ CF - Custom
- ☐ VD - Vinyl Decal*

* Please provide 600dpi Image.

CCT

- ☐ 30K - 3000Kelvin
- ☐ 35K - 3500Kelvin
- ☐ 40K - 4000Kelvin
- ☐ TW - Tunable White** (2700K-6500K)

*Other options are available.
 **Available with Dali controls.

OPTIONS

- ☐ No Options*
- ☐ 90 CRI
- ☐ DS-Daylight Sensor
- ☐ DC - Dual Circuit**
- ☐ OS - Occupancy Sensor
- ☐ DOS - Daylight & Occupancy Sensor

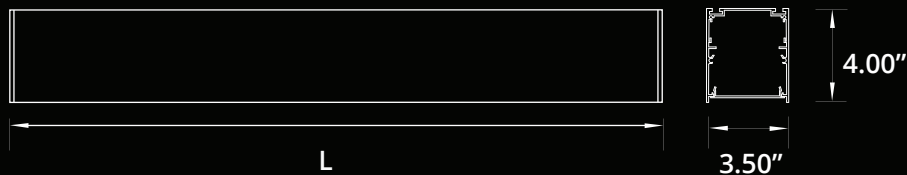
*Leave Empty.
 **Down /Up Control separately.
 ***Combination example (90CRI/DS).

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm

Project:

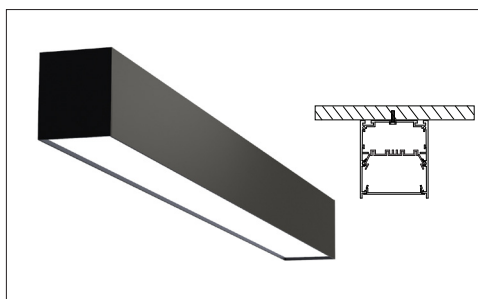
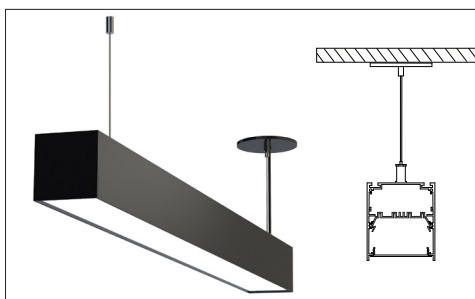
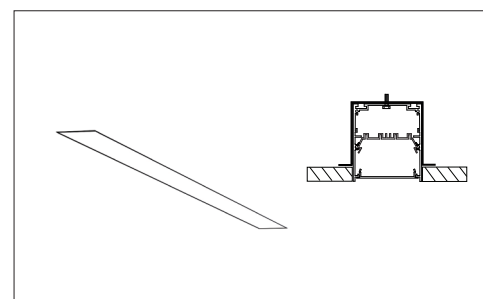
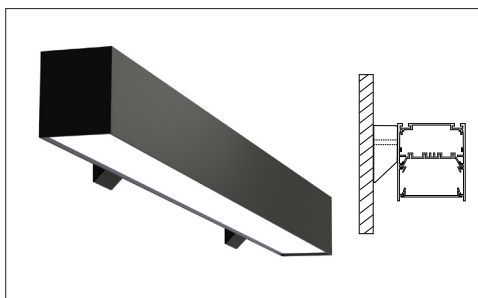
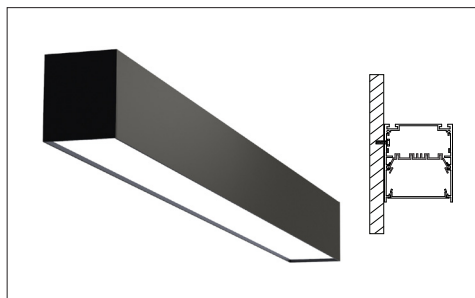
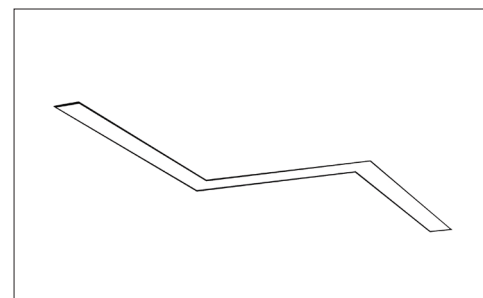
Type:

SIZE:


Size	L (LENGTH)
1 Feet	11.75 Inch
2 Feet	24.50 Inch
3 Feet	35.50 Inch
4 Feet	48.25 Inch
5 Feet	59.25 Inch
6 Feet	72.00 Inch
7 Feet	83.00 Inch
8 Feet	95.75 Inch

RADIANCE:
DIRECT DISTRIBUTION

UNEVEN DISTRIBUTION

MOUNTING:

SURFACE MOUNT

SUSPENDED

RECESSED TRIMLESS

WALL MOUNT

WALL FLUSH

90° LEFT/90° RIGHT