
FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for suspended, wall mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finishes.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED VECTOR5+ SIZE — SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LENS — FINISH — CCT — OPTIONS

Enter the Product Code into the boxes above.

SIZE

_____ Feet

SOURCE

- 5W/Ft LED
- 10W/Ft LED
- 15W/Ft LED

RADIANCE

- ED - Even(50%Down/50%Up)
- UD - Uneven(70%Down/30%Up)
- DD - Direct (100%Down)
- ID - Indirect (100%Up)

*Light Distribution.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- *
- EC - Emergency Circuit
- EM - Emergency**

 * Please specify dimming method (ELV).
 **Battery Pack per 4Feet section.

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet*
- WM - Wall Mount
- WF - Wall Flush

*Please specify required Length.

LENS

- OP - Opal
- PR - Prismatic

FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom RAL#
- VD - Vinyl Decal*

* Please provide 600dpi Image.

CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin
- TW - Tunable White** (2700K-6500K)

 *Other options are available.
 **Available with Dali controls.

OPTIONS

- No Options*
- 90 CRI
- DS-Daylight Sensor
- DC - Dual Circuit**
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

 *Leave Empty.
 **Down /Up Control separately.
 ***Combination example (90CRI/DS).


LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	535 lm	550 lm	565 lm
10W	1070 lm	1100 lm	1130 lm
15W	1610lm	1650 lm	1690 lm

Project:

Type:

SIZE:

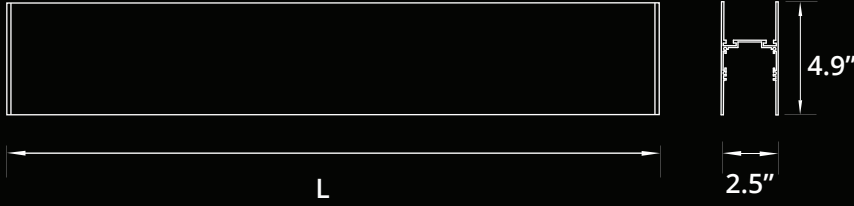

Size	L (LENGTH)
1 Feet	11.75 Inch
2 Feet	24.50 Inch
3 Feet	35.50 Inch
4 Feet	48.25 Inch
5 Feet	59.25 Inch
6 Feet	72.00 Inch
7 Feet	83.00 Inch
8 Feet	95.75 Inch

RADIANCE:


EVEN DISTRIBUTION




UNEVEN DISTRIBUTION




MOUNTING:

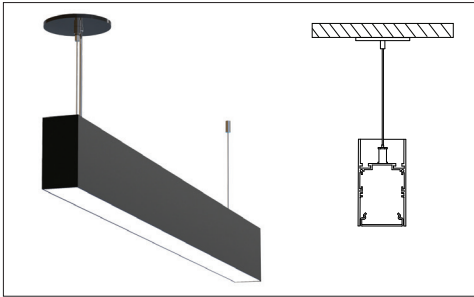


SUSPENDED

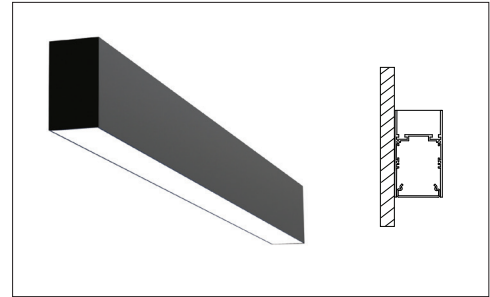

WALL FLUSH

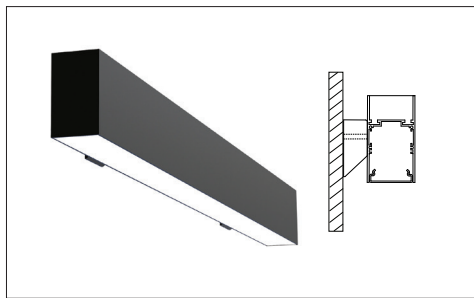

WALL MOUNT

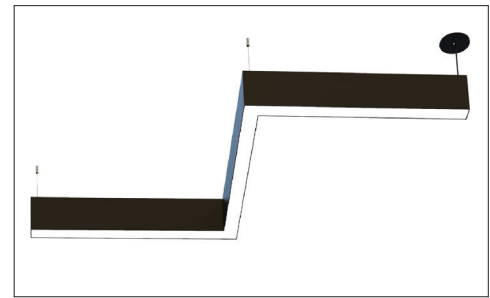

90° LEFT/90° RIGHT WITH