

Project		Date
Type		
Model		

HBLP24 LED Back-Lit Panel

2x4 Panel

Features

- Equipped with high grade PMMA diffuser, will not yellow over time.
- Voltage 120-277V.
- Lumen output from 3,717 - 6,400lm
- Efficacy from 125 - 134lm/W.
- Power Factor: >0.9
- Working Current: 0.4A
- Lifespan: 50,000 hours
- Increase energy saving with 0-10V dimming.
- Back-lit LED panel allows for better light uniformity, and improves efficiency.
- Operating temperature is -5°F to 120°F
- ETL Listed
- Mounting: Recessed



Driver terminal box with knockouts, makes for easier installation.

ORDER INFORMATION

EXAMPLE: HBLP24-40W-Y-40K



Series	Wattage	Voltage	CCT	Emergency Back-up Battery
HBLP24	30W	Y = 120-277V	35K = 3500K	Blank = None EM = Emergency Back-up Battery
	40W		40K = 4000K	
	50W		50K = 5000K	


Enter configuration:

** Special Order

PERFORMANCE DATA

MODEL	WATTS	VOLTAGE	CRI	3500K		4000K		5000K	
				LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY
HBLP24	30W	120-277VAC	80	3,717	131lm/W	3,750	132lm/W	3,815	134lm/W
	40W			5,000	125lm/W	5,120	125lm/W	5,240	130lm/W
	50W			6,120	125lm/W	6,250	125lm/W	6,400	128lm/W

DIMENSIONS

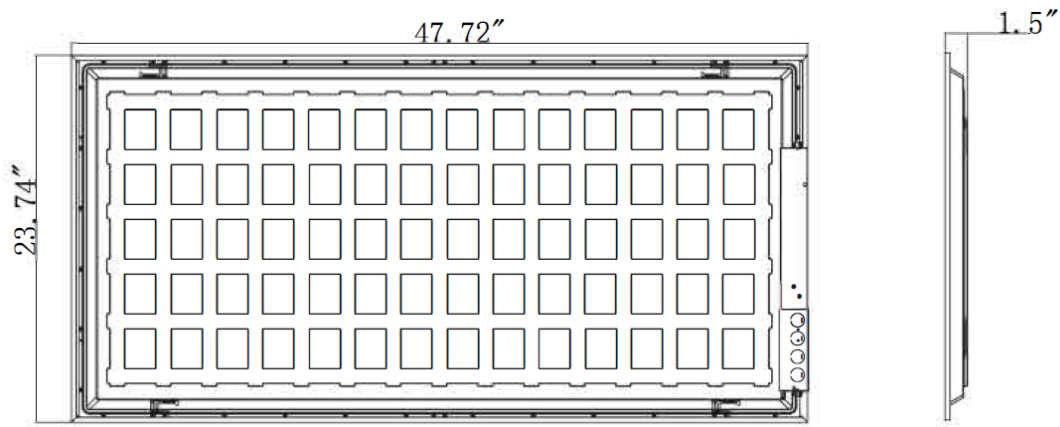

PHOTOMETRICS

