



STP-LED

High Abuse Recessed Mount **LED** Step or Wall

PRODUCT SPECIFICATION

The STP-LED series is designed for step and detail lighting in high abuse environments.

Mounting

Mounts recessed in step or wall.

Housing

16 gauge cold rolled steel, die formed to shape with seams welded and ground smooth.

Door

18 gauge one piece, die formed cold rolled steel. Aluminum and 304 stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Hardware

Stainless steel, tamper-proof door fasteners. A mounting bracket and mounting screws are provided.

Driver

0-10VDC dimming

Wiring

All electrical components are mounted to a removable wireway for easy wiring.

Certifications

UL Listed damp location.


Job Name _____

Fixture Type _____

Catalog No. _____


Approval _____ Date _____

Louvered door option

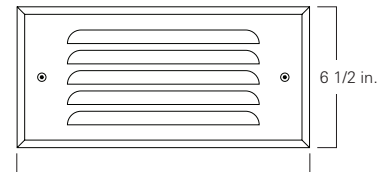

13 1/2 in.

Opal lens option



3 1/2 in.



STP [] - [] - [] - VAR [] DM [] - [] - [] - []
one two three four five six seven eight

one LED

- W White, 4000K only
- R Red
- A Amber

two Door Material

- A Aluminum
- C Cold rolled steel
- S 304 Stainless steel

three Door Finish

- R Brushed (Stainless steel only)
- W White

four Voltage

VAR Variable, 120-277 V, 50/60Hz

five Driver

DM 0-10Vdc Dimming, standard

six Lens

- 00 none, only with louvered door option
- 12 .125 in. K12 prismatic polycarbonate
- 53 .125 in. K12 prismatic acrylic
- 122 Optic Plus LED diffusing acrylic lens

seven Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

eight Options

- AM Anti-microbial coating (exposed areas)
- CU Canadian UL Listing
- E1 One lamp emergency ballast
- LD Louvered door

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.