


# Scraplights

Hewn Linear



## Color

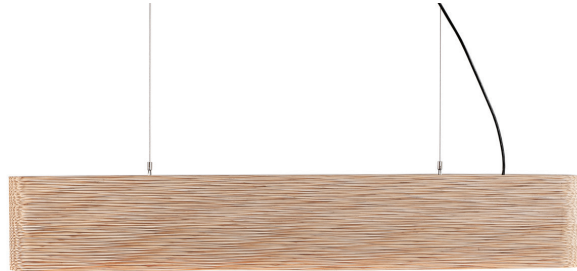

### Natural

Hewn48-4 | GP448-4H  
Hewn48-8 | GP448-8H  
Hewn48-12 | GP448-12H  
Hewn93-4 | GP493-4H  
Hewn93-8 | GP493-8H  
Hewn93-12 | GP493-12H



### Blonde

Hewn48-4 | GP2448-4H  
Hewn48-8 | GP2448-8H  
Hewn48-12 | GP2448-12H  
Hewn93-4 | GP2493-4H  
Hewn93-8 | GP2493-8H  
Hewn93-12 | GP2493-12H



### White

Hewn48-4 | GP1448-4H  
Hewn48-8 | GP1448-8H  
Hewn48-12 | GP1448-12H  
Hewn93-4 | GP1493-4H  
Hewn93-8 | GP1493-8H  
Hewn93-12 | GP1493-12H

## North America

<b>Integrated LED</b>	25-100W, 120-277V, 0-10 Dimming
<b>Color temperature</b>	3500K (options available)
<b>Lumen output</b>	750 L/Ft. Standard (options available)
<b>Cord</b>	Black, 6.5ft (16ft available) White, 6.5ft (16ft available)
<b>Canopy</b>	Black powder coated, Ø 6.1, H 1.6 (in)
<b>Material</b>	Recycled corrugated cardboard Corrugated cardboard
<b>Size</b>	L 48, W 4, H 4   8   12 (in) L 93, W 4, H 4   8   12 (in)
<b>Weight</b>	Hewn48 12H 9lbs Hewn93 12H 18lbs
<b>Fire retardant</b>	Yes (Low VOC)
<b>Country of origin</b>	United States

## Certification




Dry locations only. Clean with a dry duster or compressed air. Shades are non-toxic, handmade, and manufactured using responsible practices.

**Designed in Seattle,  
Washington, USA.**

Custom cords and canopies are available. Contact our offices for more information.

# scraplights®

Hewn Linear

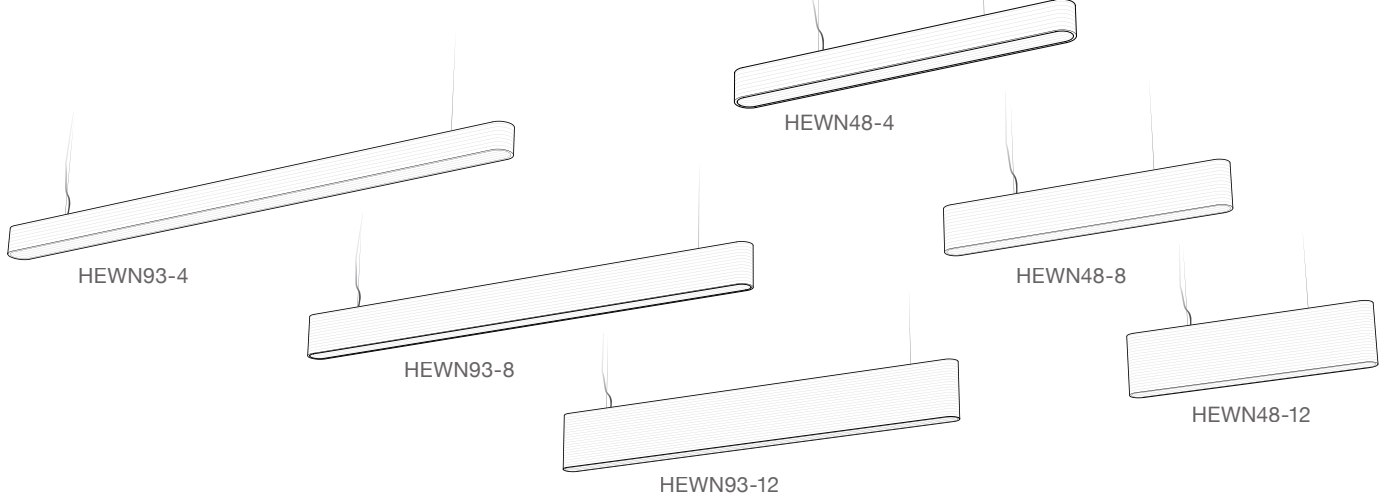

## SPECIFICATION CODE

Example: QTY 2 HEWN - GP1493-8H-STD-935-ID-HO-HE-SC-WHT



Qty.

**HEWN- GP**   -  -  -  -  -  -  -  -  -  -

①

②

③

④

⑤

⑥

⑦

⑧

⑨

⑩

For each number, make one selection and enter into the corresponding box above. \*Indicates modification with additional lead time and/or costs

### ① MATERIAL

- 4
- 14
- 24



4 - Natural



14 - White



24 - Blonde

### ② LENGTH

- 48      48.75"
- 93      93.75"

### ③ HEIGHT

- 4H      4.25"
- 8H      8"
- 12H     12"

### ④ SUSPENSION

- STD      8 ft
- EXT\*     16 ft

### ⑤ LED CRI / CCT

- 927\*      90 CRI / 2700K
- 930\*      90 CRI / 3000K
- 935\*      90 CRI / 3500K
- 940\*      90 CRI / 4000K

### ⑥ DISTRIBUTION

- ID              Indirect/Direct
- D                Direct
- I                Indirect

### ⑦ DIRECT OUTPUT

- HO              Hi Output / 750 lm/ft
- LO              Low Output 250 lm/ft
- NA              Not Applicable
- CU              Custom \_\_\_\_\_ Lm/ft

### ⑧ INDIRECT OUTPUT

- HO              Hi Output / 750 lm/ft
- LO              Low Output 250 lm/ft
- NA              Not Applicable
- CU              Custom \_\_\_\_\_ Lm/ft

### ⑨ CIRCUITING

- SC              Single Circuit
- DC\*            Dual Circuit

### ⑩ CANOPY / CORD

- BK              Black
- WHT            White