REV 01.13.20

POLLOCK NO. 07

BARN LIGHT POLLOCK COLLECTION

Max Weight: 10.0 lbs

PROJECT NAME _____

PROJECT TYPE _____

SPS-0536

BLE - C - _____ - 1007 - _____ - _____

A B C

Order Example: BLE - C - DBW12 - 1007 - SWH - E26

A - SHADE SIZE

DBW8	8″ Shade
DBW10	10″ Shade
DBW12	12″ Shade

B - CORDS

SBK	Standard Black Cord
SWH	Standard White Cord

C - SOCKET TYPE

E26	200 Watt Max
GU24	24 Bi-Pin, 23 Watt Max[1]

IMPORTANT: *(1) Fixtures configured with GU24 socket are non-returnable*

DIMENSIONAL DRAWING

Galvanized steel shades are crafted from 20 Ga Sheet metal. All shades have their edges rolled, and the result is highly durable and stylish lighting.

CORD HUNG PENDANT (C)

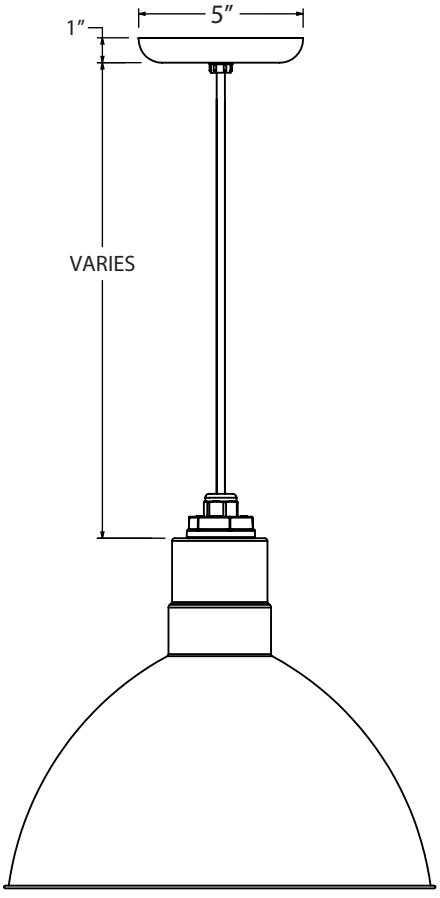

AVAILABLE SHADE SIZES

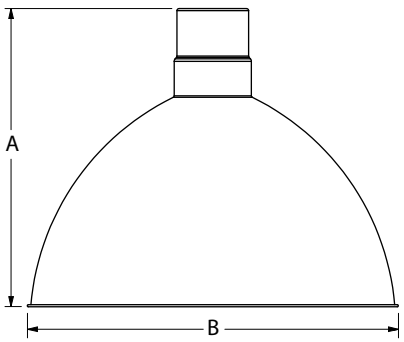

SHADE CODE	HEIGHT (A)	DIAMETER (B)
DBW8	8.25″	8″
DBW10	9″	10″
DBW12	9.75″	12″

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
INCANDESCENT (MED E26)					
E26	200W Max	1400	100	120 VAC	Bulb Dependant
COMPACT FLOURESCENT (GU24 CFL)					
GU24	23W Max	1400	75	120 VAC	Bulb Dependant

SPECIFICATIONS

SHADE & FINISHES

POLLOCK SHADE
Hand-Spun from 20 Guage Sheet Metal

PORCELAIN FINISHES
Applied by Hand and Fired in a High Temperature Oven

MOUNTING

CORD
Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton Cord, +/- For Socket Orientation

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, Fl

CSA LISTED FOR DAMP LOCATIONS

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions