

VEGA 2x2

RECESSED



Grid - shown with MTO and HLO optics

DESCRIPTION

Vega is an efficient architectural troffer with a distinctive luminous shielding that features a median textured optic. Vega provides highly efficient illumination and offers comprehensive ceiling, electrical, and controls options in 2x2, 1x4, and 2x4 sizes. See separate spec sheets for LED and other available mountings.

PROJECT: _____

APPROVED BY: _____

SIGNATURE: _____

TYPE	QTY

ORDER GUIDE


IC RATED

VEGR	22	MTO	HLO				
LUMINAIRE ID	SIZE	CENTER OPTICS	SIDE OPTICS	LIGHT SOURCE	NUMBER OF LAMPS	VOLTAGE	BALLAST
VEGR - vega recessed	22 - 2'x2'	MTO - Median Textured Optic	HLO - High-Efficiency Lambertian Optic	T5 - T5 lamp T5HO - T5HO lamp T8 - T8 lamp	1 - 1 lamp 2 - 2 lamps 3 - 3 lamps	120 - 120V 277 - 277V UNV - 120V-277V 347 - 347V (not available with Lutron)	RS - rapid start D - dimming 0-10V ST - step dimming DA - dali LHL - Lutron Hi-Lume 3D LEH - Lutron EcoSystem H

ELECTRICAL	MOUNTING	FINISH	CONTROLS	OPTIONS
1 - 1 circuit 2 - 2 circuits EM - emergency light circuit NL - night light circuit +EB - emergency battery pack +GTD### - generator transfer device, 120V or 277V	TG9 - tegular 9/16" TG15 - tegular 15/16" TB9 - t-bar 9/16" TB15 - t-bar 15/16" ST - screw slot t-bar DF - drywall kit	W - matte white CF# - custom finish specify RAL#	INDIVIDUAL CONTROLS OMS - Onboard Occupancy ODS - Onboard Daylight OCS - Onboard Occupancy & Daylight GROUPED CONTROLS LSC - Local system NSC - Network system	FU - fuse FWC - flexible whip cable (6' std) AR - air return (for grid only) CP - Chicago Plenum CU - custom

See page 6 for ordering code detailed information

CROSS SECTION

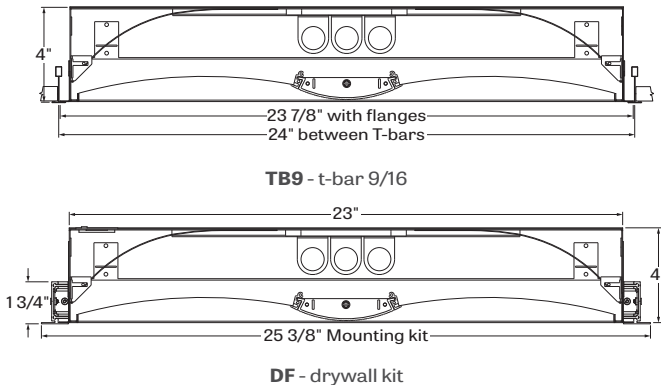

OPTICS




HLO Side optics - High-Efficiency Lambertian
MTO Center optics - Median Textured Optic

VEGA 2x2


RECESSED

LUMENWERX
WWW.LUMENWERX.COM


1 LAMP

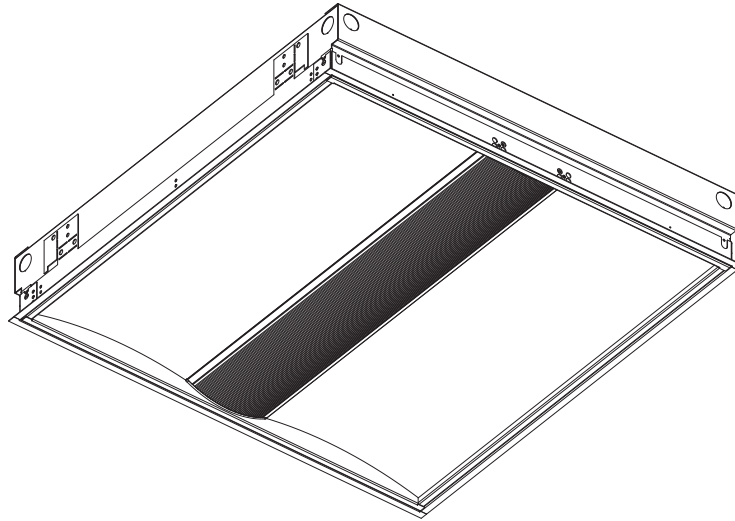


VEGA - TG9 - tegular 9/16"

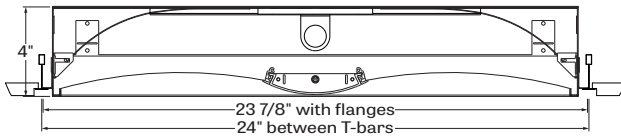


VEGA - TB15 - t-bar 15/16"

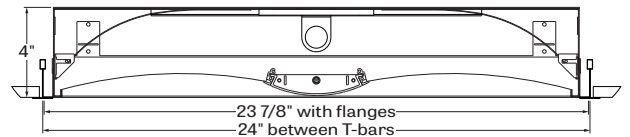


VEGA - TG15 - tegular 15/16"

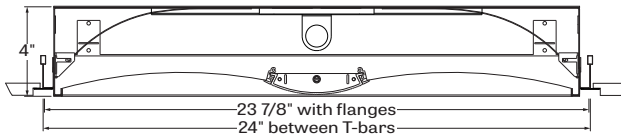


VEGA - ST - screw slot t-bar

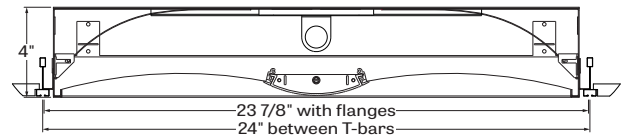


VEGA - TB9 - t-bar 9/16"




VEGA - DW - drywall kit

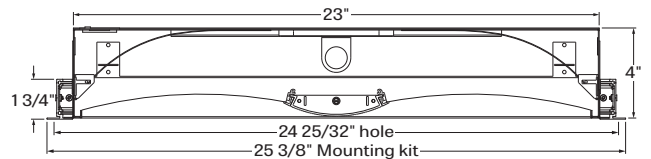


2 LAMPS

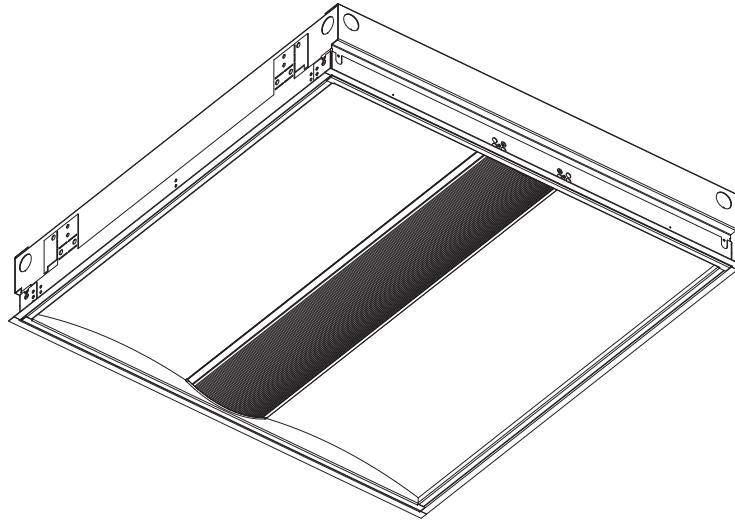


VEGA - TG9 - tegular 9/16"




VEGA - TB15 - t-bar 15/16"

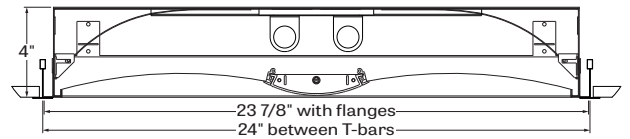


VEGA - TG15 - tegular 15/16"

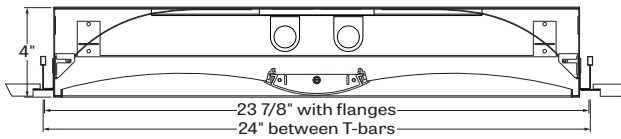


VEGA - ST- screw slot t-bar

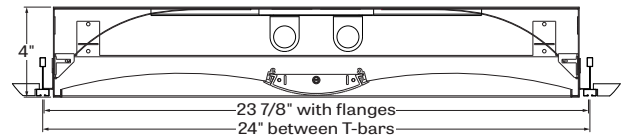


VEGA - TB9 - t-bar 9/16"

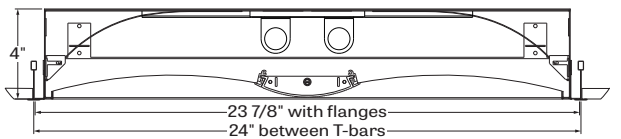


VEGA - DW- drywall kit

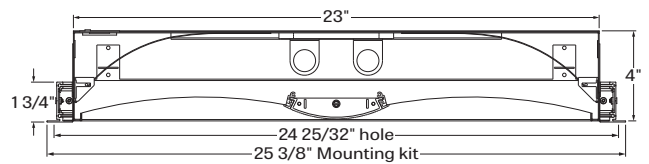


3 LAMPS

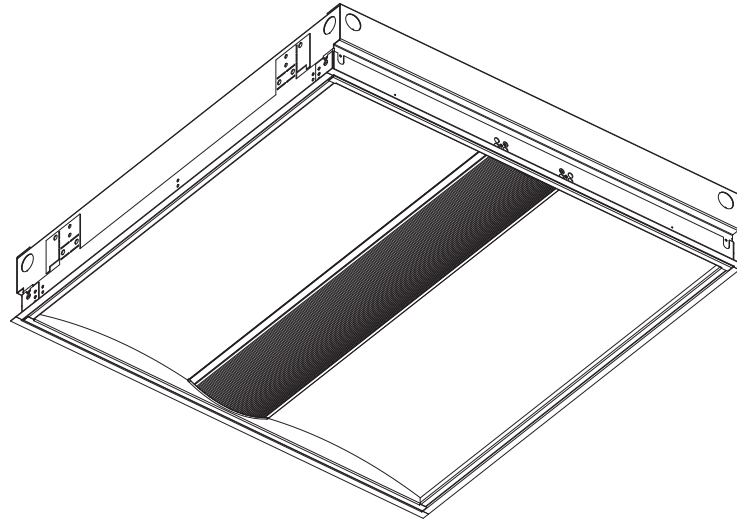


VEGA - TG9 - tegular 9/16"

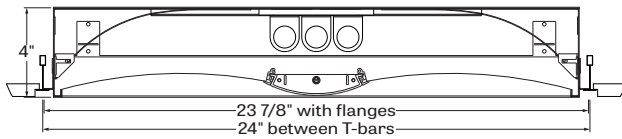


VEGA - TB15 - t-bar 15/16"

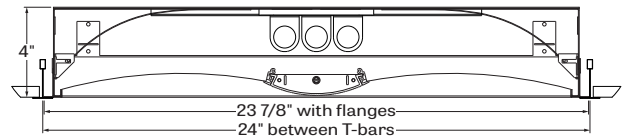


VEGA - TG15 - tegular 15/16"

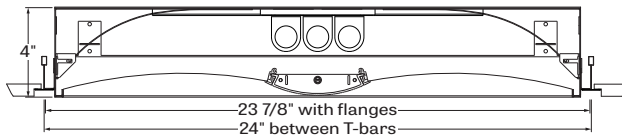


VEGA - ST- screw slot t-bar

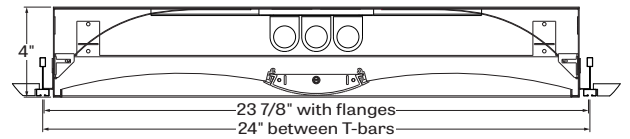

VEGA - TB9 - t-bar 9/16"

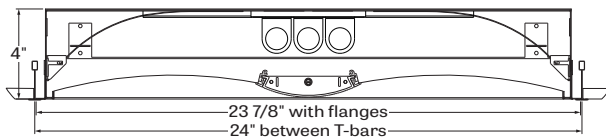


VEGA - DW- drywall kit

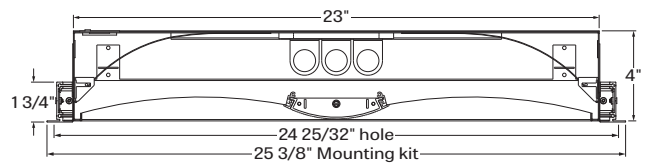


ELECTRICAL CIRCUITS


RAPID START - 1 Circuit

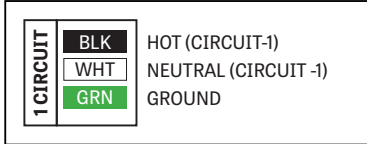


RAPID START - 1 Circuit + Emergency Battery

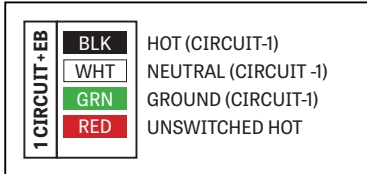


RAPID START - 1 Circuit + Emergency Circuit

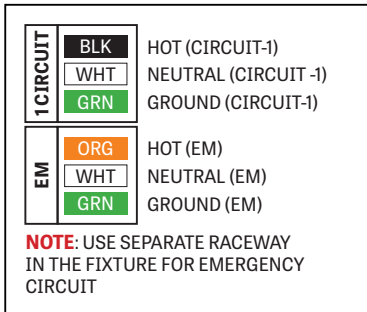


RAPID START - 2 Circuits

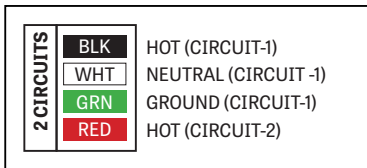


DIMMING 0-10V - 1 Circuit

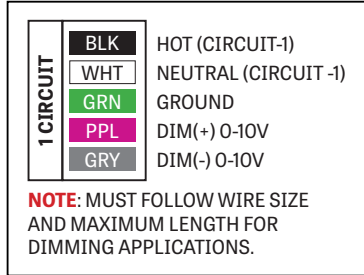


DIMMING 0-10V - 1 Circuit + Emergency Battery

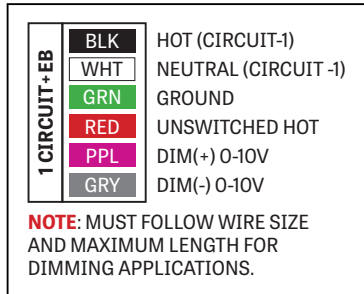


LUTRON Hi-Lume 3D - 1 Circuit

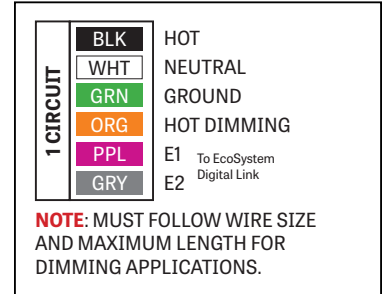


LUTRON Hi-Lume 3D - 1 Circuit+ Emergency Battery

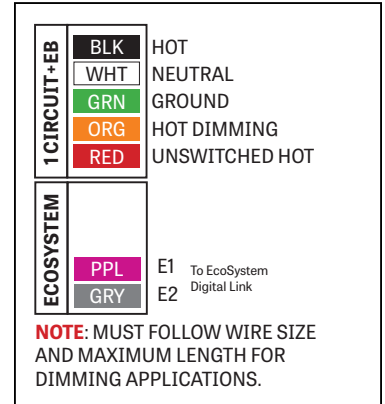

LUTRON ECOSYSTEM H - 1 Circuit

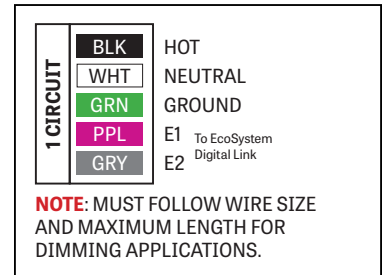

LUTRON ECOSYSTEM H - 1 Circuit + Emergency Battery

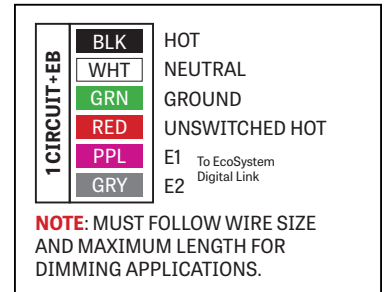

VEGA 2x2

RECESSED

OPTICS

CENTER LENS - MEDIAN TEXTURED OPTIC (MTO) - Median Textured Optic (MTO) shielding consisting of ribbed diffusing center element.

SIDE LENS - HIGH EFFICIENCY LAMBERTIAN OPTIC (HLO) - Curved sides of diffusing 0.075" thick acrylic with 90% transmission and good source obscuration. Luminaire brightness is controlled by the flux-to-shielding area ratio in addition to offering a gentle gradient from center to edge.

ELECTRICAL


Universal input voltages with multiple control schemes offered. Consult factory for availability.

EMERGENCY


Factory installed long life high temperature recyclable Ni-Cad battery pack with test switch and charge indicator, minimum of 90 minutes operation. Recharge time of 24 hours.

MOUNTING OPTIONS


Recess mount into exposed or concealed T-Bar or Tegular grid ceiling




TG9 - tegular 9/16"




TG15 - tegular 15/16"



TB9 - t-bar 9/16"




TB15 - t-bar 15/16"




ST - screw slot t-bar

A separate kit for mounting fixtures into drywall ceilings

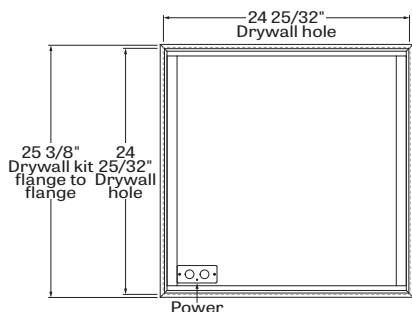

DF - drywall kit



FINISH

Interior reflectors - 95% reflective, matte white powder coating

Exterior - matte white powder coating.
Custom finish is also available.


CONTROLS

LumenWerx offers several options for integrating occupancy and daylight controls. Whether a sensors control its own fixture or is part of a group of fixtures, lights can be automatically controlled according to different energy saving strategies. With **individual Controls**, an on-board sensor controls the fixture in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire fixture, or just a section.

With **Grouped Controls**, on-board or remote sensor are part of a either a local or network sensor infrastructure. It's possible to scale the controls, from a switch to a fixture setup, to a room or a whole building Occupancy and or daylight harvesting.

INDIVIDUAL CONTROLS

Individual controls are integrated into the fixture and are therefore easy to use and allow for a cleaner looking space as no ceiling or wall-mounted sensors are required. Individual controls can be one of three types (**OMS**) Occupancy, (**ODS**) Daylight Harvesting (Photocell), or (**OCS**) combined occupancy and daylight harvesting. These controls will be installed with factory settings, but most offer field adjustability with regular tools or manufacturer supplied configuration tools.



Location of an Onboard control

GROUPED CONTROLS


Local systems permit added flexibility and interconnectivity. Each fixture can now become part of a group of fixtures and be controlled by On-Board or remote sensors as well as wireless switches or controllers. With this architecture, it is now possible to have fewer fixtures with On-Board sensor which control all of the fixtures of the lighting zone. In order to have grouped controls programmed in factory, it is required that a floor layout with requested grouping and functionality be supplied. Field commissioning is also possible but must be requested and discussed before final Purchase Order is placed.

Network Controls. Lumenwerx fixtures are compatible with most popular BMS integration protocols such as DALI, DMX, EnOcean, BACnet, Enlighted and Lutron Ecosystem just to name a few. Field commissioning is usually required and details must be discussed before final Purchase Order is placed.

Please contact our controls department at controls@lumenwerx.com for further assistance.

OPTIONS

The air return option consists in a discreet, yet efficient, slot pattern integrated into the side flanges of the luminaire, allowing the airflow to exhaust into plenum space, creating a clean, pleasant look of the ceiling.



Air Return

CONSTRUCTION

Housing - Die formed cold rolled sheet steel 20 gauge thick, matte white powder coating.

Reflectors - Cold rolled steel 0.030" thick precisely die formed, 95% reflective matte white painted.

Interior brackets - Die formed cold rolled sheet steel 20 gauge thick.

Center basket - Extruded Aluminum 0.07" nominal, matte white and lens made in clear PMMA precisely formed into optical micro-structures forms.

Side lenses - Frost impact acrylic lens 88% transmissive.

Drywall kit - Extruded Aluminum 0.07" nominal, matte white powder coating.

WEIGHT

Vega 2x2 - 16.08lbs.+2.51lbs. (drywall kit) - 7.3kg+1.14kg (drywall kit)

CERTIFICATIONS

ETL - Rated for Indoor Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

Chicago plenum - City of Chicago Approved (CCEA)

IC rated - suitable for direct contact with insulation.