




## BL-R2RG-IC-9.5COB-3D90-MW

MINIATURE ROUND GIMBAL DOWNLIGHT 9.5W

Type	
Project	
Catalog No.	

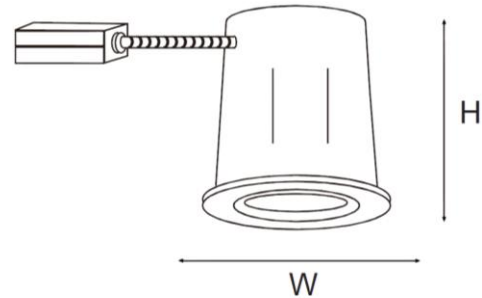

W: 3 1/8" H: 2 1/2"

### FEATURES

- 2" aperture recessed downlight
- Die-cast aluminum construction with high quality heat resistant finish.
- 15° Gimbal
- Easy installation with mouse-trap spring clips for remodel applications
- Independent power supply box, easy to maintain
- Triac and ELV dimmable (100%-10% dimming capacity)
- CRI of 90+
- 38° beam angle
- 120 VAC input voltage
- Listed for feed-through wiring



### ORDERING INSTRUCTIONS

MODEL: **BL-R2RG-IC-9.5COB-3D90-MW**

### INCLUDED ACCESSORIES



### SPECIFICATIONS

Input Voltage	120 VAC
Wattage	9.5W
Cutout	2-3/4"
CCT	3000K
Beam Angle	38°
Dimming	Triac, ELV
CRI	90+
Lumen Output	630
Efficacy	66
Lamp life*	50,000 hours
Environment	Damp
Warranty	5 years
Certification	 

\*50,000 hours at 70%