





FLUORESCENT CABLE SUSPENDED / SURFACE MOUNT



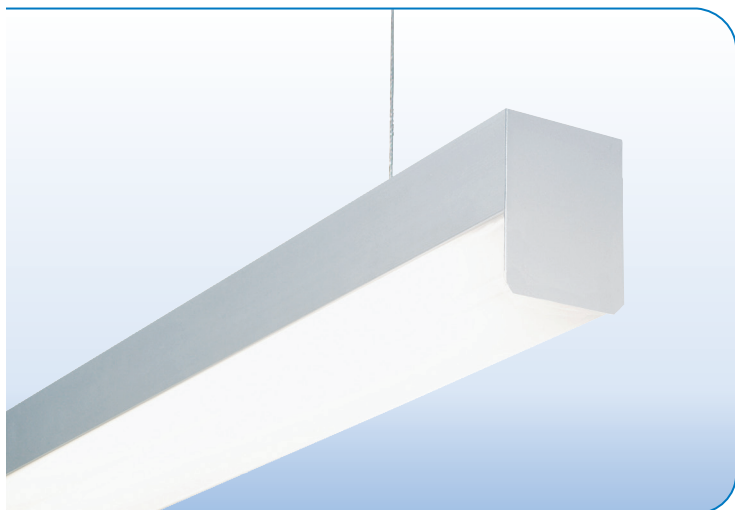

PROJECT:

TYPE:



SPECIFICATIONS

HOUSING	Two piece snap together top/bottom extruded aluminum housing up to 12' long.
FINISH	Satin anodized or white paint finish standard. Custom finish optional.
LENS	Extruded, square snap-on clear or opal white linear prismatic serrated widespread lens.
BALLAST	Integral 120 or 277V electronic ballast. Dimming ballast available.
K/O's	For surface mount only, 1/2" k/o at center back of fixture, one end, both ends or field drill.
MOUNTING	SURFACE MOUNT: Mounting holes pre-drilled. PENDANT MOUNT: Aircraft cable suspension kit (SK) 36" standard, other lengths available, aircraft cables mounted 6" from each end of the fixture. Supplied with 16/3 supply cord.
CERTIFICATION	UL listed for damp locations.  E211631  MADE IN THE USA

LAMPS & FIXTURE LENGTHS

LAMP TYPE	T5			
LAMP WATTAGE	14, 24W	21, 39W	28, 54W	35, 80W
LAMP DIMENSION	22 3/16"	33 7/8"	45 3/4"	57 9/16"
FIXTURE LENGTH	23"	35"	47"	59"
TANDEM FIXTURE LENGTH	N/A	69"	93"	117"

T8			
17W	25W	32W	40W
24"	36"	48"	60"
25"	37"	49"	61"
N/A	73"	97"	121"

PART NUMBER

SERIES	WATTS	LENS	VOLTS	BALLAST	K/O & MOUNTING	FINISH	LENGTH
ALX2-SQL-T5	REFER	C CLEAR	120	I INTEGRAL	<u>SURFACE MOUNT</u>	S SATIN	REFER
ALX2-SQL-T5T	TO	W WHITE	277	R REMOTE	B BACK CTR K/O	W WHITE	TO
ALX2-SQL-T8	CHART	F FROSTED	UNV		E ONE END	C CUSTOM	CHART
ALX2-SQL-T8T	ABOVE				BE BOTH END		ABOVE
					FD FIELD DRILL		
					<u>CABLE SUSPENDED</u>		
					SK36 36" CABLE KIT		
					SK72 72" CABLE KIT		

Consult factory for LED options.