





## LINEAR CABLE SUSPENDED / SURFACE MOUNT



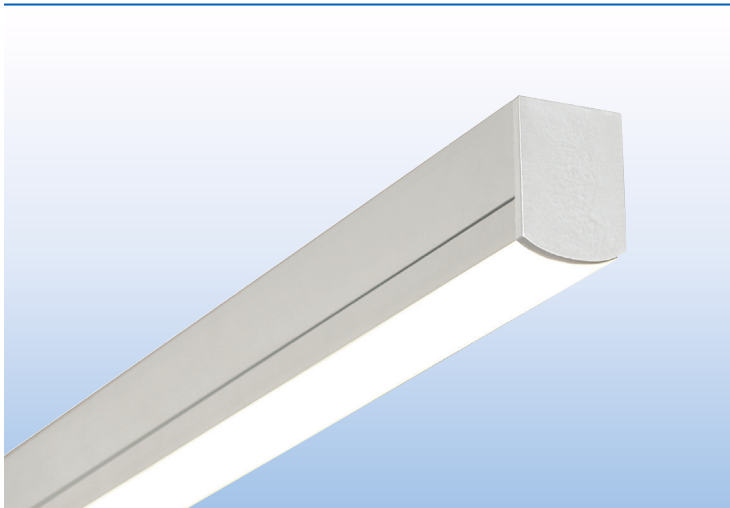

PROJECT:

TYPE:



### SPECIFICATIONS

HOUSING	Extruded aluminum housing up to 12' long. Continuous runs available.
FINISH	Satin anodized or white paint finish standard. Custom finish optional.
LENS	Extruded DR acrylic, snap-on frosted widespread lens.
LED DRIVER	Integral, universal voltage; 0-10V dimming standard; 1% or 10% dimming.
MOUNTING	SURFACE MOUNT: Mounting holes pre-drilled. See page 2 for details. CABLE SUSPENDED: Aircraft cable suspension kit (SK), canopy and prewired with 18/5 SVT cord.
LED's	60,000 hours. (L70), High uniformity, 85 CRI, by Nichia and Cree.
CERTIFICATION	ETL/CSA listed for damp locations.  2001431  MADE IN THE USA

### LED COLOR & LUMEN OPTIONS

		LUMENS PER FOOT – WATTS PER FOOT – LUMENS PER WATT								
LED COLOR	CRI	LOW			MEDIUM			HIGH		
WHITE 2700K	85	458 L/FT	3.9 W/FT	117 L/W	850 L/FT	7.9 W/FT	107 L/W	1149 L/FT	11.5 W/FT	100 L/W
WHITE 3000K	85	474 L/FT	3.9 W/FT	121 L/W	878 L/FT	7.9 W/FT	111 L/W	1187 L/FT	11.5 W/FT	103 L/W
WHITE 3500K	85	487 L/FT	3.9 W/FT	124 L/W	903 L/FT	7.9 W/FT	114 L/W	1221 L/FT	11.5 W/FT	106 L/W
WHITE 4000K	85	497 L/FT	3.9 W/FT	126 L/W	920 L/FT	7.9 W/FT	116 L/W	1244 L/FT	11.5 W/FT	108 L/W


Values include .85 driver efficiency factor. Higher lumen packages available.

### PART NUMBER

SERIES	LUMENS	COLOR	VOLTS	MOUNTING	ENDCAP STYLE	FINISH	LENGTH
ALX3-FRL	L LOW	27K 2700K	UNV	<u>CABLE SUSPENDED</u>	<u>STANDARD ENDCAP</u>	S SATIN	2' 8'
	M MEDIUM	3K 3000K	(120/277)	SK36 36" CABLE KIT	SEB BLANK ENDS	W WHITE	3' 9'
	H HIGH	35K 3500K	10% DIM	SK48 48" CABLE KIT	SEK ONE END K/O		4' 10'
				SK72 72" CABLE KIT	SBK BOTH ENDS K/O	C CUSTOM	5' 11'
	CP CUSTOM PROGRAMMED (Specify Lumens/FT or Watts/FT)	4K 4000K	UNV 1%	<u>SURFACE MOUNT</u>	<u>ARCHITECTURAL ENDCAP</u>		6' 12'
			(120/277)	SM SURFACE MOUNT	AEB BLANK ENDS		7'
			1% DIM	JBP J BOX PLATE			

## MOUNTING


### CABLE SUSPENDED

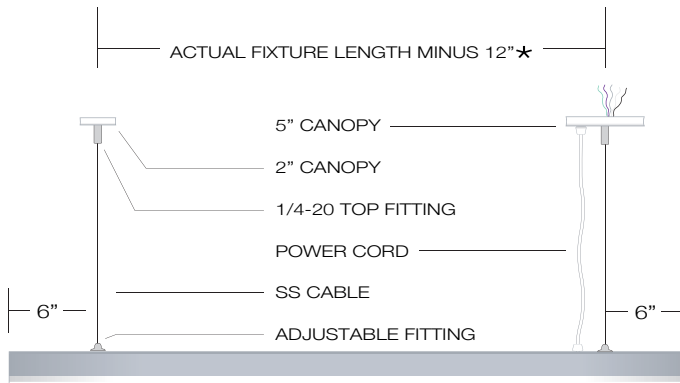


**SK36** 36" Suspension Kit  
**SK48** 48" Suspension Kit  
**SK72** 72" Suspension Kit  
 Other cable lengths available.  
 Suspension Kit includes:  
 (2) Top Fittings for 1/4-20 Rod  
 (2) Adjustable Bottom Fittings  
 (2) Aircraft Cables  
 (1) Prewired 18/5 White SVT Cord  
 (1) 5" White Canopy with Mounting Hardware  
 (1) 2" White Canopy

\*Custom pendant spacing available; consult factory  
 \*Lengths over 8' require center cable support  
 \*EM option includes 18/6 cord

### SURFACE MOUNT

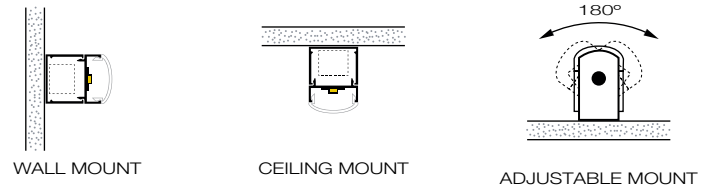


### MOUNTING DETAILS

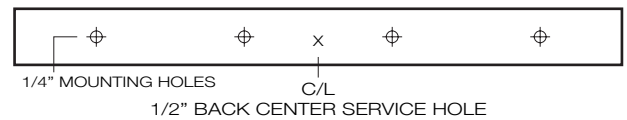


- 1/4" Mounting holes provided evenly spaced on back channel.
- 1/2" Back center service hole for snap-in connector provided for surface mount applications when using standard blank endcap or architectural endcap.
- 2' fixtures require off center service hole due to 12" driver

Note: Narrow housing will not cover recessed J Box. Whip feed recommended. Use optional "JBP" canopy plate for J-Box mount. (See Picture Below)



**J-BOX PLATE**  
**JBP** 5" FLAT CANOPY PLATE  
 TO COVER J-BOX


## ENDCAP STYLES



**STANDARD ENDCAP**


### K/O OPTIONS

**SEB** BLANK ENDS  
**SEK** ONE END K/O  
**SBEK** BOTH END K/O



**ARCHITECTURAL ENDCAP**

**AEB** BLANK ENDS  
 3/16" PLATE ENDCAP  
 1/2" BACK SERVICE HOLE



**ADJUSTABLE MOUNT**

**AM** ADJUSTABLE END  
 BRACKETS  
 3' CORD STANDARD

## PHOTOMETRICS (CONSULT FACTORY)

## FIXTURE LENGTHS

NOMINAL LENGTH	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'
ACTUAL LENGTH	23"	34"	49"	56"	73"	89"	97"	111"	121"	133"	145"