

# CADET BFP LED


Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- ADA Compliant
- Class 2 LED Driver: 120V - 277V
- CRI > 80
- Die-Formed Cold-Rolled Steel Housing
- ETL/cETL Listed For Damp Locations
- LED Light Fixture
- High Transmission Acrylic Optical Shade
- Wall Mounted
- 5 Years Warranty on Driver and LED Module



## LINE DRAWING

LINE DRAWING NOT TO SCALE

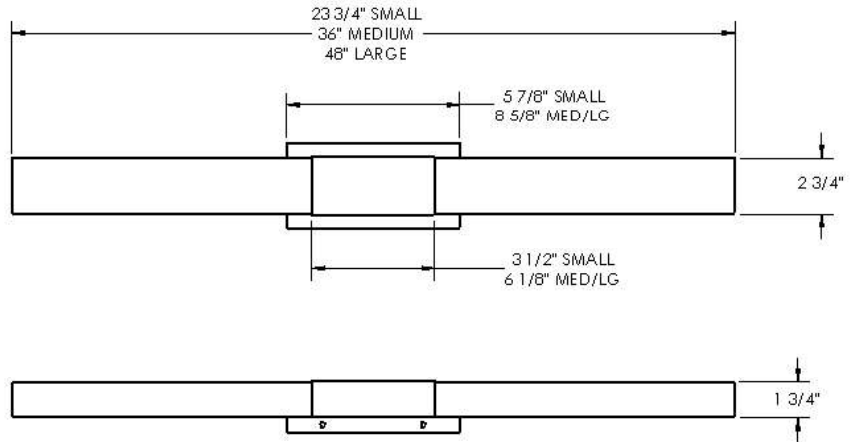

## FINISHES

Satin Nickel



# CADET BFP LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	TRIM	SOURCE/WATTAGE	DIMMING
CDTL - Cadet Large BFP LED	Not Applicable	L35.0 - 35W	Not Applicable
CDTM - Cadet Medium BFP LED		L23.0 - 23W	
CDTS - Cadet Small BFP LED		L17.0- 17W	

VOLTAGE	FINISH	COLOR TEMP	OPTIONS
UNV - 120V - 277V	SN - Satin Nickel	30K - 3000K Color Temp 35K -3500K Color Temp 40K - 4000K Color Temp MCT- 3500K, 4000K, 5000K Color Temp.	Not Applicable

PROD	SOURCE	30K SPECS				
CDTL	L35.0	<ul style="list-style-type: none"> <li>• 30K - 3000K Color Temp</li> <li>• 3200 LED Source Lumens</li> <li>• 91.4 LED Source Lumens Per Watt</li> </ul>				
CDTM	L23.0	<ul style="list-style-type: none"> <li>• 30K - 3000K Color Temp</li> <li>• 1900 LED Source Lumens</li> <li>• 82.6 LED Source Lumens Per Watt</li> </ul>				
CDTS	L17.0	<ul style="list-style-type: none"> <li>• 30K - 3000K Color Temp</li> <li>• 1500 LED Source Lumens</li> <li>• 88.2 LED Source Lumens Per Watt</li> </ul>				

## NOTES

Don't see the configuration you are looking for?  
Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM

REV 3/10/22

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.