

LAFLUER MEDIUM LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- ADA Compliant
- Dimmable @ 120V
- ETL/cETL Listed for Dry Locations
- LED Light Fixture
- Steel Composition
- Wall Mounted
- 4.2 lbs.
- 80+ CRI



LINE DRAWING

LINE DRAWING NOT TO SCALE

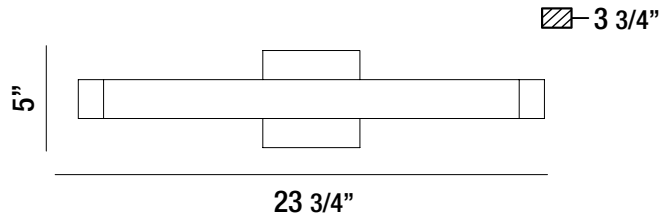

FINISHES

Satin Nickel



For RAL Colors
& Custom
Match -
Contact Teron
Lighting Inc.

LAFLUER MEDIUM LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
LFLMD - Lafluer Medium LED	L15.0-LT350 - 15.0W @ 350mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge)	120V	TRIAC Dimming @ 120V
ORDER INFO			
LFLMD Example ^	L15.0-LT350	120V	TRIAC

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	SN - Satin Nickel	30K - 3000 Color Temp	Not Applicable
ORDER INFO			
Not Applicable Example ^	SN	30K	Not Applicable

PROD	SOURCE	30K SPECS				
LFLMD	L15.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 1280 LED Source Lumens 85.3 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.