

# MONZA DOUBLE RING LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




## FEATURES

- Acrylic Lens
- Adjustable Cable
- Aluminum Construction
- Ceiling Mounted
- CRI  $\geq$  90
- Dimmable @ 120V (100% - 10%)
- Dimming Driver Contained In Canopy
- ETL Listed For Dry Locations
- LED Light Fixture
- 120V Only
- 2" Recommended Minimum Cable Length; 59" Maximum Fixture Length
- 2 Total Lights
- ~50,000 Hour Rated LED Life

## LINE DRAWING

LINE DRAWING NOT TO SCALE

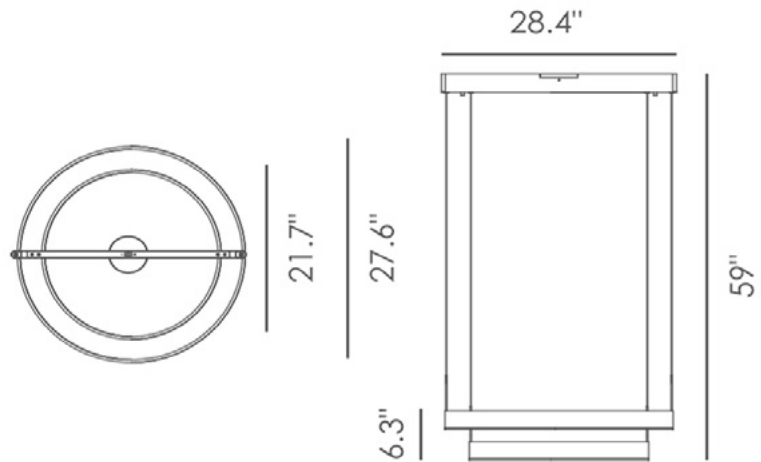

## FINISHES

Deep Taupe    Brushed Gold



# MONZA DOUBLE RING LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
<b>MZDR - Monza Double Ring LED</b>	<b>L53.0-LT1200 - 53W @ 2100mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge)</b>	<b>120V</b>	<b>ELV or TRIAC Dimming @ 120V</b>
ORDER INFO			
MZDR	L53.0-LT2100	120V	ELV, TRIAC

Example ^

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>DT - Deep Taupe BG - Brushed Gold</b>	<b>30K - 3000K Color Temp</b>	<b>Not Applicable</b>
ORDER INFO			
Not Applicable	DT, BG	30K	Not Applicable

Example ^

PROD	SOURCE	30K SPECS				
MZDR	L53.0	<ul style="list-style-type: none"> <li>• 30K - 3000K Color Temp</li> <li>• 4320 LED Source Lumens</li> <li>• 81.5 LED Source Lumens Per Watt</li> <li>• 1964 Delivered LED Lumens</li> <li>• 37.1 Delivered LED Lumens Per Watt</li> </ul>				

## NOTES

Don't see the configuration you are looking for?  
Call us today at (513) 858-6004



TERONLIGHTING.COM  
33 DONALD DR, FAIRFIELD, OH 45014  
P: 513.858.6004 F: 513.858.6038  
E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.