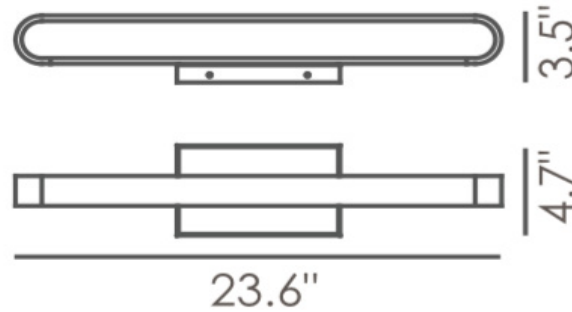# RIALTO SMALL LED

Architectural Indoor

FEATURES

- Acrylic Lens
- ADA Compliant
- Aluminum Construction
- CRI ≥ 90
- 120V
- Dimmable @ 120V
- Dimmable to 10%
- Down or Up Light Vanity
- ETL Listed For Dry Locations
- LED Light Fixture
- Wall Mounted
- ~50,000 Hour Rated LED Life

LINE DRAWING

LINE DRAWING NOT TO SCALE

3.5"

4.7"

23.6"

FINISHES

Brushed
Aluminum

RIALTO SMALL LED

Architectural Indoor

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
RIS - Rialto Small LED	**L11.0-LT700** - 11W @ 700mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge)	**120V**	**ELV or TRIAC Dimming @ 120V**

ORDER INFO

RIS	L11.0-LT700	120V	ELV, TRIAC

Example ^

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	**AL** - Brushed Aluminum	**30K** - 3000K Color Temp	**Not Applicable**

ORDER INFO

Not Applicable	AL	30K	Not Applicable

Example ^

PROD	SOURCE	30K SPECS				
RIS	L11.0	• 30K - 3000K Color Temp • 1050 LED Source Lumens • 95.5 LED Source Lumens Per Watt • 97 Delivered LED Lumens • 8.8 Delivered LED Lumens Per Watt				

NOTES

Don't see the configuration you are looking for?
Call us today at (513) 858-6004

TERON LIGHTING