TEMPO SMALL VANITY LED

Architectural Indoor

F



FEATURES

- Acrylic Lens
- ADA Compliant
- Aluminum Construction

PROJECT: TYPE:


COMMENTS:

PO#:

- CRI \ge 90
- Dimmable @ 120V
- Dimmable to 10%
- ETL Listed For Dry Locations
- LED Light Fixture
- Wall Mounted
- 120V
- ~50,000 Hour Rated LED Life

LINE DRAWING

LINE DRAWING NOT TO SCALE

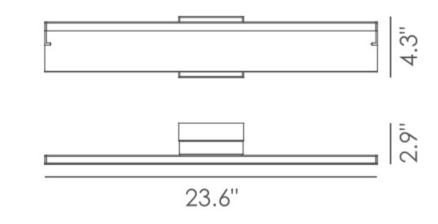

FINISHES

Brushed Black





 TERONLIGHTING.COM

 33 DONALD DR, FAIRFIELD, OH 45014

 P: 513.858.6004
 F: 513.858.6038

 E: SALES@TERONLIGHT.COM

QTY:

TEMPO SMALL VANITY LED

Architectural Indoor

E 🕕 📼

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

Fixture Core				
PRODUCT CODE SOURCE/WATTAGE		VOLTAGE	DIMMING DRIVER	
TPSD - Tempo Small Vanity LED L11.0-LT350 - 11W @ 350mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge)		120V	ELV or TRIAC Dimming @ 120V	
ORDER INFO				
TPSV	L11.0-LT350	120V	ELV, TRIAC	

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS	
Not Applicable	BBK - Brushed Black	30K - 3000K Color Temp	Not Applicable	
ORDER INFO				
Not Applicable	DT, BG	30K	Not Applicable	

PROD	SOURCE	30K SPECS		
PROD TPSV	SOURCE L11.0	 30K SPECS 30K - 3000K Color Temp 1320 LED Source Lumens 120 LED Source Lumens Per Watt 924 Delivered LED Lumens 84 Delivered LED Lumens Per Watt 		

Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 2