

SENTINALL™

S511L SERIES (2000)

PRODUCT FEATURES:

- » Surface wall mount – nominal 5"Wx11"H
- » ADA Compliant



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

LENS: UV-stabilized, high impact, virgin injection molded polycarbonate.

HOUSING: 18-gauge CRS, provided with four-point mounting holes, one wireway knockout, and four conduit knockouts. TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours. See Options marine grade aluminum housing (AL).

REFLECTOR: Full reflector/wire cover (92% reflectivity).

GASKET: Die-cut closed cell neoprene gasket seals lens to housing and housing to mounting surface.

HARDWARE: One stainless steel Torx® with center pin fastener secures lens to housing.

ELECTRICAL: Available in 3500K, 4000K, and 5000K color temperatures, 80 CRI. 120-277VAC or 347VAC, 50/60Hz electrical input with high power factor electronic, constant-current driver (>.90 PF). Standard 0-10V dimming with 1-100% range; maximum driver source of 200 µA.

INSTALLATION: Standard four-point mounting required for Peace of Mind Guarantee®.

PHOTOMETRICS: Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For additional photometric data, please go to www.kenall.com.

WARRANTY: Limited five (5) year LED warranty

LISTINGS: Luminaire is certified to UL Standards by Intertek Testing Laboratory for Wet Location. ADA compliant.



ORDERING INFORMATION (Ex: S511L-P-DB-16L40K-DV)

| Model | Lens Type | Finish | Lamp Type | Voltage | Options | Accessories |
|--------------|----------------------|--|--|---|---|-------------------------------|
| S511L | P | | | | | |
| | Lens Type | Finish | Lamp Type | Voltage | Options | Accessories |
| | P Pearlescent | MW Matte White DB Dark Bronze | 8L35K 8 Watt 3500K LED 8L40K 8 Watt 4000K LED 8L50K 8 Watt 5000K LED 16L35K 16 Watt 3500K LED 16L40K 16 Watt 4000K LED 16L50K 16 Watt 5000K LED | 347 347 Volts DV 120-277 Volts | AL Marine Grade Aluminum Housing | 9500 Torx® Screwdriver |



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

A brand of **legrand**

SENTINALL™


S511L SERIES (2000)

PERFORMANCE

| Lamp Type | Initial Delivered Lumens | | Input Power (W) | Drive Current (mA) | Estd. L70 LED Life (Hrs) |
|-----------|--------------------------|-----------------|-----------------|--------------------|--------------------------|
| | @ 25°C | Efficacy (lm/W) | | | |
| 8L35K | 1154 | 84 | 14 | 75 | 85,000 |
| 8L40K | 1154 | 84 | 14 | 75 | 85,000 |
| 8L50K | 1258 | 92 | 14 | 75 | 85,000 |
| 16L35K | 1628 | 83 | 20 | 150 | 65,000 |
| 16L40K | 1628 | 83 | 20 | 150 | 65,000 |
| 16L50K | 1775 | 90 | 20 | 150 | 65,000 |

Information subject to change. Visit www.kenall.com for IES files and additional information.


Model: S511L-P-MW-16L40K-DV



Max Candela = 1192 Located At Horizontal Angle = 0, Vertical Angle = 87.5

- 1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)
- 2 - Horizontal Cone Through Vertical Angle (87.5) (Through Max. Cd.)

DIMENSIONAL DATA

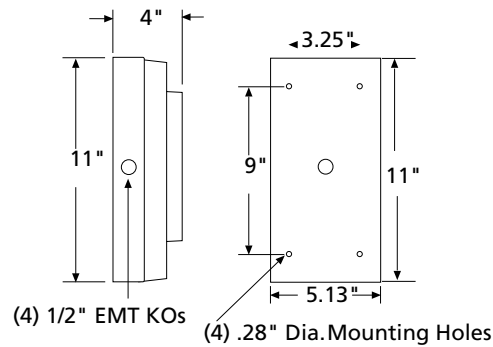

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

A brand of **legrand**