

ORDERING CODE

ANGP1L

CPH1A

MVOLT

PROJECT INFO

DATE

TYPE

QUANTITY


CPH1A Linear Pendant Mount					
NOMINAL LENGTH	ACTUAL LENGTH	SOURCE	LUMENS	INPUT WATTS	WEIGHT
2FT	27.50"	AL1AN1	1118	10w	13 lbs.
		AL1AH1	2243	22w	
3FT	38.94"	AL1AN1	1668	15w	17 lbs.
		AL1AH1	3349	32w	
4FT	50.31"	AL1AN1	2332	20w	21 lbs.
		AL1AH1	4443	41w	
8FT	95.54"	AL1AN1	4664	40w	38 lbs.
		AL1AH1	8886	82w	

Example:
ANGP1L
LSL
20FT
MSL4
CPH1A
INT
AL1NA1
30K
MVOLT
N100
CA
SGW

ANGP1L					CPH1A											
SERIES		LINEAR PLAN		TOTAL RUN LENGTH	MAX SELECTION LENGTH		MOUNT ACCESSORY	ENVIRONMENT	SOURCE	LED CCT						
ANGP1L	Asymmetric LED Linear Pendant Mount	LSL	Linear Same Length	FT	MSL2	2FT Length	CPH1A	Continuous Mount Pendant Hub Assembly	INT	Interior Location	AL1AN1	Asymmetric LED Normal Output 1	30K	3000K CCT		
		LCB	Linear Center Balanced		MSL3	3FT Length			WL ^{1,3}	Wet Location			35K	3500K CCT		
					MSL4	4FT Length			NT ^{1,3}	Natatorium Construction					40K	4000K CCT
					MSL8 ¹	8FT Length ¹										
				1 8FT not available for wet or natatorium location use.				1 8FT not available for wet or natatorium location use. 3 Top gasketed lens assembly automatically included with WL selection.								
See page 2 for descriptions																

		MVOLT												
LED CRI		VOLTAGE		ELECTRICAL OPTION		LENS		FINISH		SPECIAL				
—	80+ CRI	MVOLT	Multi Volt 120V thru 277V	N100	nLight Enabled Module	CA	Clear Acrylic (blank)	SGW	Semi-Gloss White	MOD	Modification (consult factory)			
	90 CRI			90+ CRI	(blank)			None	SGB			Semi-Gloss Black		
												ALP	Aluminum Paint (matte)	
												CPF ²	Custom Paint Finsh	
						For use with INT option only		2 For custom finish specify MOD.						

CLEAR LENS

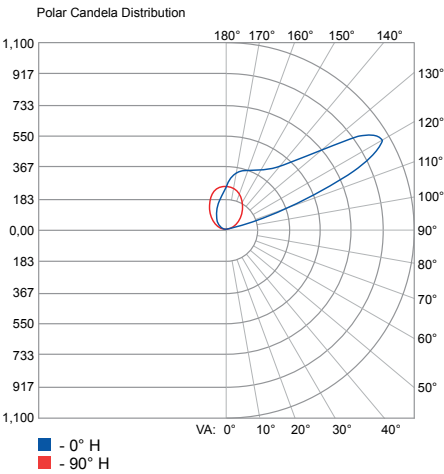


Test Report: **ISF35341 (PRORATED)**
IES LM 79-08
ANGP1L INT 48LONG 30K HIGH (clear lens)

Lumens: **4443**
Wattage: **41W**
Efficacy: **108.3**
Max. Candela: **4185**
CRI: **81.9**

Zonal Lumen Summary		
Zone	Lumen	% Luminaire
70-100	24.2	0.5%
90-120	1361.5	30.6%
90-180	4425.1	99.6%
0-180	4443	100.0%

Angle	Candlepower Distribution					
	Plane					
	0	45	90	135	180	
0	4	4	4	4	4	4
30	0	4	8	4	0	0
60	0	4	8	4	4	4
80	0	8	12	4	0	0
90	0	4	8	0	0	0
100	8	151	52	28	28	
105	171	831	111	64	52	
110	1602	1892	179	107	91	
115	3263	2416	250	159	139	
120	4185	2086	322	207	183	
125	3787	1637	385	258	223	
130	2941	1395	453	310	262	
135	2305	1311	525	362	310	
140	1931	1296	588	409	358	
145	1741	1303	656	457	405	
150	1617	1323	735	513	457	
160	1474	1331	874	660	596	
170	1347	1248	970	819	771	
180	1029	1029	1029	1029	1029	

WET LOCATION

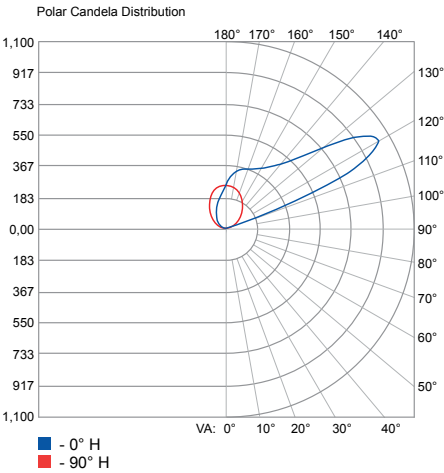

Test Report: **ISF35340 (PRORATED)**
IES LM 79-08
ANGP1L WL 48LONG 30K HIGH (wet location)


Lumens: **4359**
Wattage: **41W**
Efficacy: **106.3**
Max. Candela: **4109**
CRI: **81.9**

Zonal Lumen Summary		
Zone	Lumen	% Luminaire
70-100	24.2	0.6%
90-120	1256.4	28.8%
90-180	4340.7	99.6%
0-180	4359	100.0%

Angle	Candlepower Distribution					
	Plane					
	0	45	90	135	180	
0	4	4	4	4	4	4
30	0	4	8	4	0	0
60	0	8	8	4	0	0
80	0	8	8	4	0	0
90	0	4	8	4	0	0
100	4	16	52	48	44	
105	20	707	107	83	75	
110	644	1804	183	131	119	
115	3199	2301	254	175	163	
120	4109	2023	322	226	211	
125	3751	1589	389	278	246	
130	2917	1387	461	326	290	
135	2293	1315	528	377	334	
140	1963	1291	596	425	385	
145	1756	1299	668	473	429	
150	1621	1319	735	532	477	
160	1486	1339	882	676	612	
170	1363	1256	981	834	795	
180	1041	1041	1041	1041	1041	



CPH1A Continuous Pendant Mount Hub
Length Chart
2FT = 27.5"
3FT = 38.94"
4FT = 50.31"
8FT = 95.94"

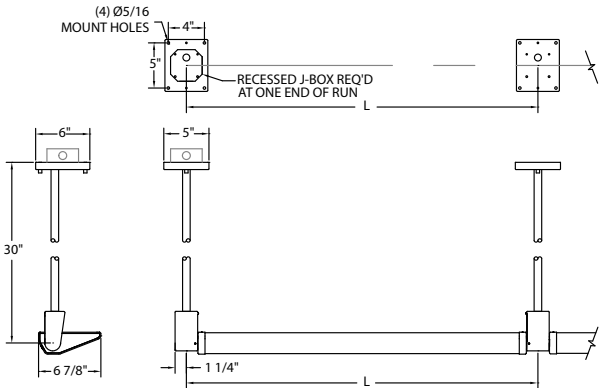

IES data is available at www.alights.com. Always refer to our website for the latest IES files updates.

LINEAR PLAN

A.light offers the ability to provide a continuous run plan to suit your requirements by optionally offering three methods of configuration.

LSL LINEAR SAME LENGTH:


In this configuration each segment is the same length is standardized based on the longest length available and is the only option provided. Because it is dependent on one segment length there are mathematical limitations on what overall row lengths can be achieved. Example: 40FT row would be achieved with (5) 8FT long segments equaling 40FT (nominal).

LCB LINEAR CENTER BALANCED:

This configuration incorporates the longest center segment(s) along with any additional lengths required to fill located at each end. Example: 38FT row would have (2) 3FT segments (one at each end) and (4) 8FT intermediate segments located in between.

LLP LINEAR LONGEST POSSIBLE:

In this plan the longest length available is optimized resulting in the fewest segments and mounting locations. Caution should be used where balanced appearance is a concern. Example: 42FT row would have (5) 8FT segments and (1) 2FT segment located at one end.

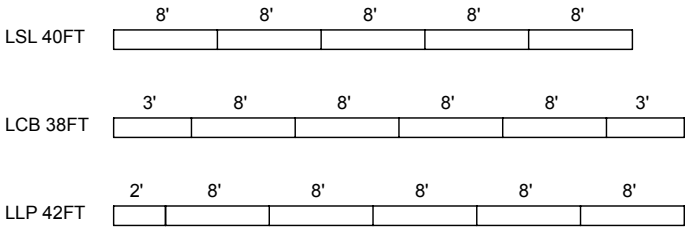

CONSTRUCTION

Extruded aluminum housing, optional clear acrylic lens, die-cast end caps with stainless steel hardware.

SOURCE

LED lumen packages provide high performance asymmetric distribution in 3000K, 3500K or 4000K color temperature options. Components are designed to be serviceable and replaceable.

L80 >60,000 hours at 25°C ambient temperature.

OPTICS

Advanced asymmetric optical system optimized for LED source and arrayed for specific lumen output and distribution.

FINISH

6 stage pre-treated polyester powder coat painted finish. All hardware is stainless steel.

ELECTRICAL

LED light engine consists of modular LED boards and 0-10V dimming driver rated for 50,000 hours at 25°C ambient temperature, wattage is dependent on luminaire output. eldoLED solodrive power supply integrally mounted. Boards and drivers are modular for replacement or service. Compatible with the following Acuity Controls: nLight nPS 80 EZ and LC&D MicroPanel.

CONTROLS

Optional intelligence allows for constant lumen management and facilitates simple networking and control via CAT-5e cable. nLight components are provided as accessories for remote field installation.

ENVIRONMENT

UL and cUL listed for interior dry or wet location use; optional natatorium construction (NT). Optional Natatorium Location (NT) constructed as wet location unit. Ambient operating temperature -20°C to 35°C.

A+ CAPABLE LUMINAIRE

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a shaded background*
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a shaded background*

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

WARRANTY

Limited defect-free manufactured equipment warranty provided under normal use and proper storage for a period of one (1) year. LED products (LED boards and drivers) will be covered for a period of five (5) years. Wet location fixtures are not recommended for extreme wet weather conditions and must be installed according to factory drawings; there is a modified warranty for LED components installed in applications not in accordance with factory recommendations/drawings. Please refer to full terms and conditions on our website.