



# RFL4A-CY-8


## VERSATRIM ADJUSTABLE CYLINDER

Job Information	Project:
	Model#:
	Location:
	Contact:


VERSATRIM ADJUSTABLE CYLINDER



### DIMENSIONS



### Mounting Features

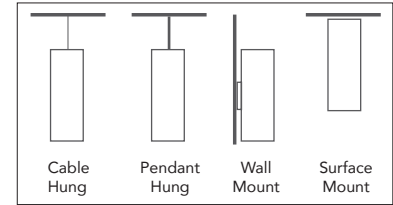

### USE OF PRODUCT

The Versatrim Adjustable Cylinder Series may be used in hospitality, commercial, retail, and residential interior applications. This product will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source.

### HOUSING

Rugged aluminum housing.

### ARCHITECTURAL CYLINDER FEATURES

- Wattage: 11 Watts
- Lumens: 900 Lumens
- Voltage: 120V standard; 120-277V (with optional 0-10V dimming driver)
- Color Temperature: 2700K, 3000K, 3500K, 4000K
- SDCM: 2 Step binning
- R9 Value: 85
- Color Rendering Index: 93 CRI Typical
- LED Life: 50,000 hours
- LED Type: Cree LED for maximum light output
- Versatility: Interchangeable baffle, reflector and trim ring
- Warranty: 5 Year Limited Warranty

### DIMMING

Standard Triac/ELV, 120V. (019) 0-10V dimming in 900 lumens, 120-277V.

### MOUNTING

The Versatrim Adjustable Cylinder Series may be cable hung, stem mount, surface mount or wall mounted.

### MODULE MECHANICS

The Versatrim Cylinder Series is constructed of a durable heat sink, baffle or reflector, trim ring, diffused lens, and Cree LEDs for optimum performance. Carefully designed heat sink keeps junction temperatures below unsuitable levels by dissipating heat away from the module. Diffused polycarbonate impact-resistant lens allows for even light output, glare control, and conceals LEDs from view. The Adjustable Cylinder Series provides 0-30° tilt and 360° Rotation.

### LABELS / COMPLIANCE

CSA classified  
CSA classified for damp locations



### ORDERING INFO

Series	Diameter	Shape	Length	Watts/Lumens	Color Temp.	Dimming	Cylinder Finish
RFL	4A - 4" Adjustable	CY - Cylinder	8 - 8" MTO - Made to order	9L - 11Watts/900 Lumens (120V)	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	Blank <sup>1</sup> - TRIAC/ELV (120V) 019 - 0-10V (900 lm, 120-277V)	BL - Black WH - White SL - Silver MTO - Made to order

Lens Holder Finish	Beam Angle	Reflector	Trim	Configuration	Mounting	Option
HW - White HB - Black HS - Silver	18 - 18° 38 <sup>2</sup> - 38° 60 - 60°	4ARLW - White 4ARLB - Black 4ARLCH - Chrome 4ARLH - Haze 4ARLSN - Satin Nickel 4ARLC - Custom	ROUND 4TLW - White 4TLC - Copper 4TLB - Black 4TLH - Haze 4TLSN - Satin Nickel 4TLBZ - Bronze 4TLCX - Custom	DL - Down Light	PH <sup>3</sup> - Pendant Hung SC <sup>4</sup> - Single Cable DC - Double Cable TC - Triple Cable SM - Surface Mount WM <sup>5</sup> - Wall Mount	019 - 0-10V (900 Lumens) E - Emergency Back-up SDT - Step Down Transformer H - Honey comb F - Frosted comb

1. 120V only.
2. Standard beam angle.
3. 18" Standard length, Consult factory
4. 5' Standard cable length
5. Emergency Not available



www.rayonlighting.com  
info@rayonlighting.com

Tel: 323.446.2626  
Fax: 323.446.2606


Specification and product availability subject to change without notice.

05/22



Job Information	Project:
	Model#:
	Location:
	Contact:

**MOUNTING**


**CABLE HUNG DIMENSION**




Cable Hung Canopy



**STEM MOUNT DIMENSION**

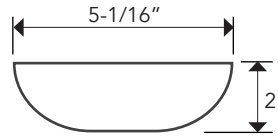

Stem Mount Canopy

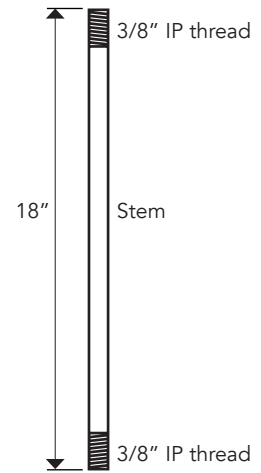

3/64" Galvanized Cable Fuse Cut with Die Cast #1 Stop  
Available in 24", 36", 50", 72", 100", 120", & 150" Lengths  
7x7 Cable - MAX LOAD 270 lbs