


PROJECT: _____


MODEL #: _____

LOCATION: _____

CONTACT: _____



MOUNTING FEATURES

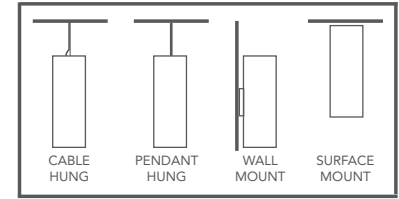

USE OF PRODUCT

The Versatrim Square Luminaire Series may be used in hospitality, commercial, retail, and residential interior applications. This product will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source.

HOUSING

Rugged aluminum housing.

VERSATRIM SQUARE LUMINAIRE FEATURES

- Wattage/Lumens
10.5 Watts/800 Lumens
12.5 Watts/1,100 Lumens
- Color Temperature: 2700K, 3000K, 3500K, 4000K
- SDCM: 2 Step binning
- Color Rendering Index: 93 CRI Typical
- LED Life: 50,000 hours
- LED Type: Cree LED for maximum light output
- Versatility: Interchangeable baffle, reflector and trim ring
- Warranty: 5 Year Limited Warranty

DIMMING

Available in Triac/ELV (120V) or 0-10V (120-277V) driver.
Triac/ELV version dims approximately to 7-10%.
The 0-10V drivers dims approximately to 5%.

MOUNTING

The Versatrim Square Luminaire Series may be cable hung, stem mount, surface mount or wall mounted.

MODULE MECHANICS

The Versatrim Square Luminaire Series is constructed of a durable heat sink, baffle or reflector, trim ring, diffused lens, and Cree LEDs for optimum performance. Carefully designed heat sink keeps junction temperatures below unsuitable levels by dissipating heat away from the module. Diffused polycarbonate impact-resistant lens allows for even light output, glare control, and conceals LEDs from view.

LABELS / COMPLIANCE

CSA classified
CSA classified for damp locations

ORDERING INFO

| Series | Diameter | Shape | Length | Watts/Lumens | Color Temp. | Dimming | Finish |
|--------|----------|-----------------------|---------------------------------|---|--|---|--|
| RFL | 4 - 5" | SL - Square Luminaire | 16 - 16" MTO - Made to order | 8L - 12Watts/800 Lumens (120V) 11L - 17Watts/1100 Lumens (120V/277V) | 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K | Blank - TRIAC/ELV (120V) 018 - 0-10V (800 lm, 120-277V) 011 - 0-10V (1100 lm, 120-277V) | BL - Black WH - White SL - Silver MTO - Made to order |

| Baffle or Reflector | Trim | Configuration | Mounting | Option |
|------------------------------|---|--|---|-------------------------------------|
| SBLW - White SBLB - Black | SRLSN - Satin Nickel SRLB - Black SRLW - White SRLCH - Chrome SRLBZ - Bronze SRLH - Haze | UL - Up-Light DL - Down-Light BD ¹ - Bi-Direction | PH ^{2,5} - Pendant hung SC ³ - Single cable TC - Triple cable QC ⁴ - Quaduple Cable SM ⁵ - Surface Mount WM - Wall Mount | EM ⁶ - Emergency battery |

1 Bi- directional only available in triple cable or wall mount
2. 18" standard length, consult factory for other
3. 5ft standard cable length
4. Bi- Directional available in Quadruple cable only (Ceiling Mount
5. Available in daylight only.
6. EM available in external remote location.

PROJECT:

MODEL #:

LOCATION:

CONTACT:

LED HEIGHT INSIDE SQUARE LUMINAIRE

