

# PRIME

3" PRIME LED ARCHITECTURAL ROUND FLANGELESS ADJUSTABLE

JOB INFORMATION	TYPE:
	CATALOG NO.
	PROJECT NAME:
	COMMENTS:
PREPARED BY:	

### USE OF PRODUCT

The 3" PRIME Adjustable is a small aperture fixture with shallow height that may be used in residential and commercial applications. Die cast trims with an assortment of color temperatures, optics and dimmable drivers. May be used in plaster, wood and marble ceilings.

### PRIME FEATURES

Color Temperature: 2700K, 3000K, 3500K, or 4000K  
 SDCM: 2 step binning  
 Color Rendering Index: 93+ CRI  
 Optical Lens: 12°, 22°, 27°, 35°, 45°  
 Trim: Die cast  
 LED Life: 50,000 Hours  
 LED Type: Cree LED  
 Driver Info: 120-277V, 50/60 Hz, PF>0.9, THD<0.20  
 Warranty: 5 year limited warranty

### LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. LED engine is accessible from below ceiling.

### FRAME CONSTRUCTION

IC rated housing constructed from 16 gauge heavy duty powder coated cold rolled steel frame. Junction box with 1/2" knockouts. Trimless Mud adapter plate available for plaster ceilings. Millwork adapter available for marble or wood ceilings. Butterfly bracket included to accommodate adjustable bar hangers or C-channel (ordered separately)

### ADJUSTMENT

- Light engine allows for hot aiming from 0-40°.  
 - Housing provides for 359° locking rotation  
 - Aperture collar compatible up to 1½" ceiling thickness.  
 - Accommodation for 2" or 3" ceiling thickness available upon request.

### OPTICAL LENS & FILTERS (Field Replaceable)

Field replaceable optical lens available in 12°, 22°, 27°, 35° and 45°. Easily achieve narrow spot to wide flood beam pattern. Accepts up to 2 filters.

### DIMMING

Available in 10 driver selections. (ID) Standard all-inclusive ELV(120V), Triac(120V), and 0-10V(120-277V) dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LDES) Lutron Hi-Lume 5% Ecosystem, 120-277V. (LTE) Hi-Lume 1% 2-wire, 120V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V. Driver accessible from below ceiling.

### THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C.

### TRIM

Die cast trim. Consult factory for made to order finishes.

### EMERGENCY BATTERY

Optional emergency battery available for a minimum of 90 minutes with remote test switch in 800 delivered lumens.

### LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada  
 - Dry/Damp/Wet location rated.  
 - Energy Star  
 - Title 24, JA8 Compliant  
 - 5 Year limited warranty



### ORDERING INFO

Series	Lumens	Color Temp	Voltage	Dimming	Optical Lens	Filter
<b>PRIME SERIES</b>	8 - 890 lm 11 - 1175 lm 16 - 1650 lm	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	UNV - 120-277V 120 - 120V 347 - 347V	ID <sup>1</sup> - Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive) PEQ0 - Lutron Hi-lume Premier Ecosystem 0.1% w/soft on, fade to black dimming LDE1 <sup>2</sup> - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming LTE <sup>2</sup> - Hi-Lume 1% 2-wire L3DA - Hi-lume 1% EcoSystem/3-Wire L3D Driver EEI <sup>3</sup> - eldoLED Eco 1% Dim (0-10V) EDIO <sup>2,3</sup> - eldoLED Solo 0.1% Dim (0-10V) EDID <sup>2,3</sup> - eldoLED Solo 0.1% Dim (DALI)	12 - 12° 22 - 22° 27 - 27° 35 - 35° 45 - 45°	None - Leave blank F - Frosted H - Honeycomb S - Solite filter L - Linear filter

Housing Type	Aperture	Frame Accessories	Collar	Option
IC - IC New Construction	RLAP - Round Flangeless Adjustable-plaster RLAM - Round Flangeless Adjustable Millwork	AH - Adjustable bar hanger C - C Channel bar hanger B - Flat bar hanger	Blank - 1.5" Depth 20 - 2" Depth 30 - 3" Depth MTO - Made to order	ER8 <sup>2</sup> - Emergency battery with remote switch (800 Lumens) CP - Chicago Plenum

1. Standard driver.  
 2. Ceiling access required.  
 3. Must specify logarithmic or linear eldoLED driver.

### TRIM ORDERING INFORMATION



Aperture Size / Shape / Trim Type / Style	Bevel Opening	Bevel Finish	Options
3RLO - 3" Round Flangeless Open 3RLA - 3" Round Flangeless Accent	Die Cast CL - Die cast large opening	W - White B - Black H - Haze BZ - Bronze C - Clear MTO - Made to order	WL - Wet location

# PRIME

PRIME 3" LED ARCHITECTURAL ROUND  
FLANGELESS ADJUSTABLE

3" PRIME ADJUSTABLE

## DIMENSIONS

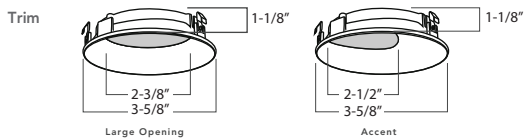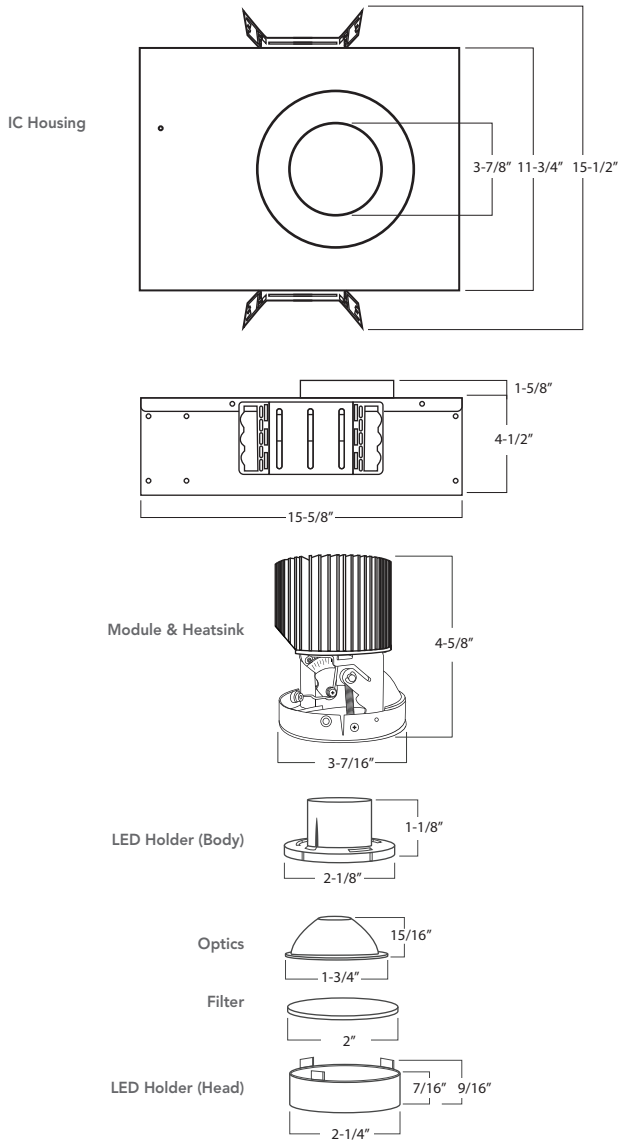


## LUMEN CHART

Wattage	Delivered Lumens	Voltage	CRI
10W	890 Lm	120-277V	93+
14W	1175 Lm	120-277V	93+
20W	1650 Lm	120-277V	93+

\*Above chart and ordering information reflect delivered lumens based on 3000K, 35° optical lens, with white bevel.  
\*\*Lumens will vary based on CCT, optical lens, and bevel finish

## FRAME ACCESSORIES

**B**

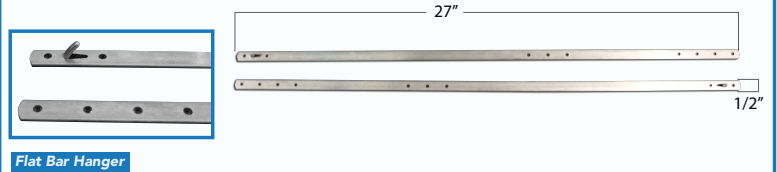


**C**



**AH**



## COLLAR DEPTH PER CEILING THICKNESS

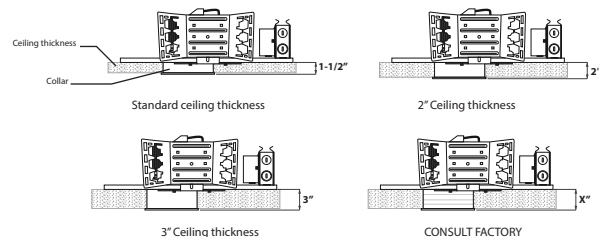

# PRIME

PRIME 3" LED ARCHITECTURAL ROUND  
FLANGELESS ADJUSTABLE


3" PRIME DOWNLIGHT

## AT-A-GLANCE TECHNICAL INFORMATION

### RPA - 8L

#### 12° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-8L-30K-12°- Round Large Open
LUMENS	853.9 LM
WATTS	10 W
CCT	3000K

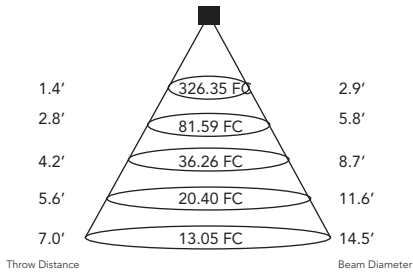


Zone	Lumens	%Lamp	%Luminaire
0-30	770.6	90.2%	90.1%
0-40	813.0	95.2%	95.1%
0-60	849.0	99.4%	99.3%
60-90	6.2	0.7%	0.7%
0-90	855.2	100.2%	100%

Zone Lumen Summary

### RPA - 8L

#### 22° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-8L-30K-22°- Round Large Open
LUMENS	843.5 LM
WATTS	10 W
CCT	3000K

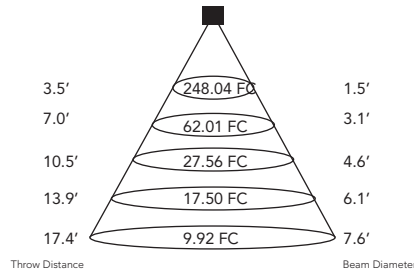


Zone	Lumens	%Lamp	%Luminaire
0-30	748.9	88.8%	88.7%
0-40	804.5	95.4%	95.3%
0-60	838.3	99.4%	99.3%
60-90	5.9	0.7%	0.7%
0-90	844.2	100.1%	100%

Zone Lumen Summary

### RPA - 8L

#### 27° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-8L-30K-27°- Round Large Open
LUMENS	862.4 LM
WATTS	10 W
CCT	3000K

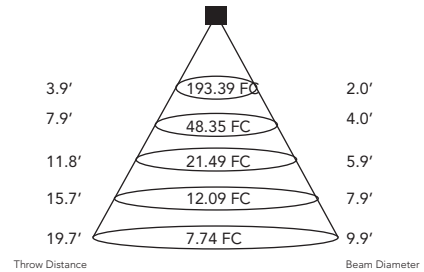


Zone	Lumens	%Lamp	%Luminaire
0-30	775.4	89.9%	89.9%
0-40	828.3	96.1%	96%
0-60	858.2	99.5%	99.5%
60-90	4.7	0.5%	0.5%
0-90	862.9	100.1%	100%

Zone Lumen Summary

### RPA - 8L

#### 35° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-8L-30K-35°- Round Large Open
LUMENS	889.5 LM
WATTS	10 W
CCT	3000K

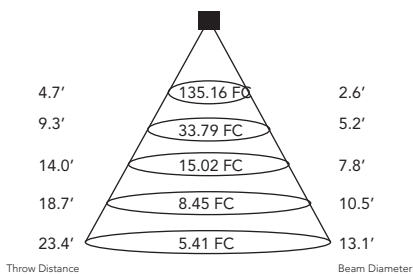


Zone	Lumens	%Lamp	%Luminaire
0-30	774.3	87%	87%
0-40	848.5	95.4%	95.4%
0-60	884.8	99.5%	99.5%
60-90	4.8	0.5%	0.5%
0-90	889.5	100%	100%

Zone Lumen Summary

### RPA - 8L

#### 45° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-8L-30K-45°- Round Large Open
LUMENS	861 LM
WATTS	10 W
CCT	3000K

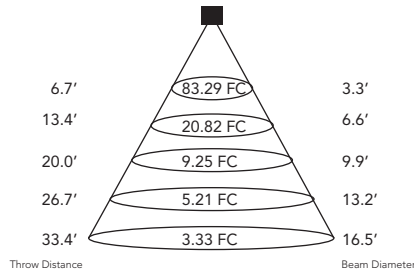

Zone	Lumens	%Lamp	%Luminaire
0-30	625.2	72.6%	72.6%
0-40	778.1	90.4%	90.4%
0-60	854.3	99.2%	99.3%
60-90	6.4	0.7%	0.7%
0-90	860.7	100%	100%

Zone Lumen Summary

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

# PRIME

PRIME 3" LED ARCHITECTURAL ROUND  
FLANGELESS ADJUSTABLE


3" PRIME DOWNLIGHT

## AT-A-GLANCE TECHNICAL INFORMATION

### RPA - 11L

#### 12° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-11L-30K-12°- Round Large Open
LUMENS	1148.1 LM
WATTS	14 W
CCT	3000K

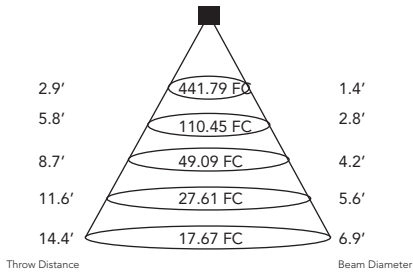


Zone	Lumens	%Lamp	%Luminaire
0-30	1,035.1	90.2%	90.1%
0-40	1,092.5	95.2%	95.1%
0-60	1,141.1	99.4%	99.3%
60-90	8.7	0.7%	0.7%
0-90	1,149.8	100.2%	100%

Zone Lumen Summary

### RPA - 11L

#### 22° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-11L-30K-22°- Round Large Open
LUMENS	1146.7 LM
WATTS	14 W
CCT	3000K

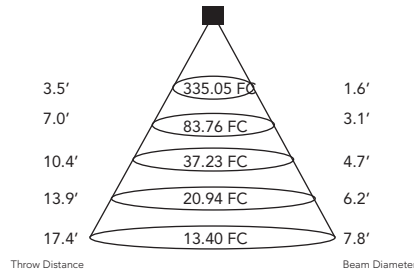


Zone	Lumens	%Lamp	%Luminaire
0-30	1,018.2	88.8%	88.7%
0-40	1,093.4	95.4%	95.2%
0-60	1,139.6	99.4%	99.3%
60-90	8.4	0.7%	0.7%
0-90	1,148.0	100.1%	100%

Zone Lumen Summary

### RPA - 11L

#### 27° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-11L-30K-27°- Round Large Open
LUMENS	1177.4 LM
WATTS	14 W
CCT	3000K

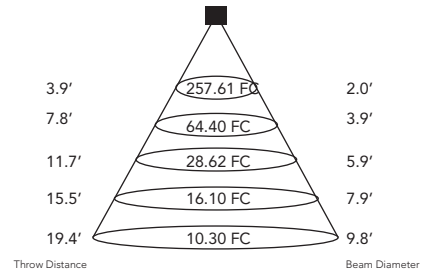


Zone	Lumens	%Lamp	%Luminaire
0-30	1,048.7	89.1%	89.1%
0-40	1,126.2	95.7%	95.6%
0-60	1,170.0	99.4%	99.4%
60-90	7.4	0.6%	0.6%
0-90	1,177.5	100%	100%

Zone Lumen Summary

### RPA - 11L

#### 35° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-11L-30K-35°- Round Large Open
LUMENS	1203.8 LM
WATTS	14 W
CCT	3000K

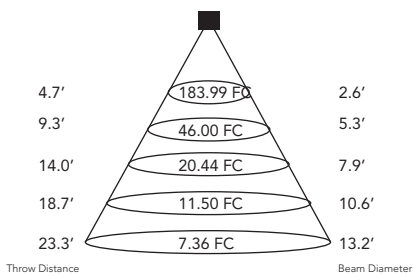


Zone	Lumens	%Lamp	%Luminaire
0-30	774.3	87%	87%
0-40	848.5	95.4%	95.4%
0-60	884.8	99.5%	99.5%
60-90	4.8	0.5%	0.5%
0-90	889.5	100%	100%

Zone Lumen Summary

### RPA - 11L

#### 45° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-11L-30K-45°- Round Large Open
LUMENS	1165.8 LM
WATTS	14 W
CCT	3000K

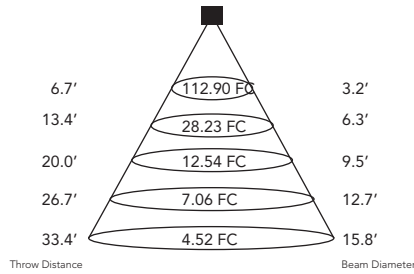

Zone	Lumens	%Lamp	%Luminaire
0-30	846.1	72.6%	72.6%
0-40	1,053.3	90.4%	90.4%
0-60	1,156.9	99.2%	99.2%
60-90	8.9	0.8%	0.8%
0-90	1,165.8	100%	100%

Zone Lumen Summary

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

# PRIME

PRIME 3" LED ARCHITECTURAL ROUND  
FLANGELESS ADJUSTABLE


3" PRIME DOWNLIGHT

## AT-A-GLANCE TECHNICAL INFORMATION

### RPA - 16L

#### 12° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-16L-30K-12°- Round Large Open
LUMENS	1560 LM
WATTS	20 W
CCT	3000K

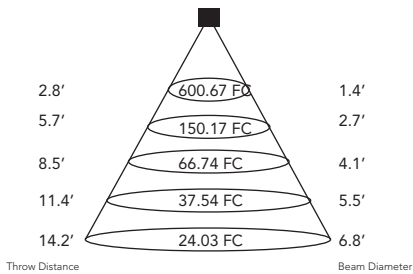


Zone	Lumens	%Lamp	%Luminaire
0-30	1,404.7	90%	89.9%
0-40	1,483.0	95.1%	94.9%
0-60	1,550.3	99.4%	99.2%
60-90	12.5	0.8%	0.8%
0-90	1,562.8	100.2%	100%

Zone Lumen Summary

### RPA - 16L

#### 22° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-16L-30K-22°- Round Large Open
LUMENS	1541.5 LM
WATTS	20 W
CCT	3000K

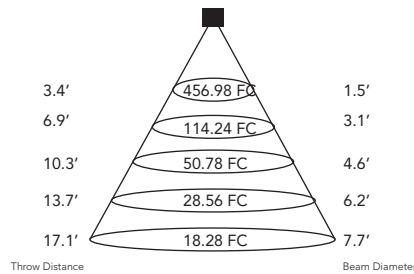


Zone	Lumens	%Lamp	%Luminaire
0-30	1,368.4	88.8%	88.7%
0-40	1,468.7	95.3%	95.2%
0-60	1,531.6	99.4%	99.3%
60-90	11.9	0.8%	0.8%
0-90	1,543.5	100.1%	100%

Zone Lumen Summary

### RPA - 16L

#### 27° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-16L-30K-27°- Round Large Open
LUMENS	1590.2 LM
WATTS	20 W
CCT	3000K

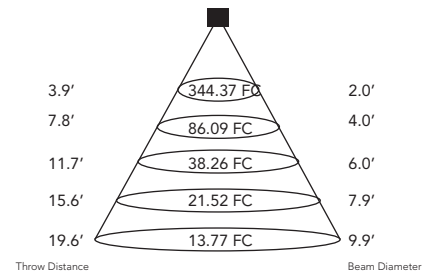


Zone	Lumens	%Lamp	%Luminaire
0-30	1,409.6	88.6%	88.6%
0-40	1,517.8	95.4%	95.4%
0-60	1,579.5	99.3%	99.3%
60-90	11.0	0.7%	0.7%
0-90	1,590.5	100%	100%

Zone Lumen Summary

### RPA - 16L

#### 35° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-16L-30K-35°- Round Large Open
LUMENS	1648.7 LM
WATTS	20 W
CCT	3000K

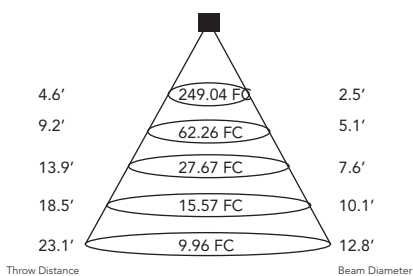


Zone	Lumens	%Lamp	%Luminaire
0-30	1,434.0	87%	87%
0-40	1,571.9	95.3%	95.3%
0-60	1,639.1	99.4%	99.4%
60-90	9.7	0.6%	0.6%
0-90	1,648.7	100%	100%

Zone Lumen Summary

### RPA - 16L

#### 45° Beam, Round Large Open

TEST DATE	2019-07-12
SERIES	RPA3-16L-30K-45°- Round Large Open
LUMENS	1570 LM
WATTS	20 W
CCT	3000K

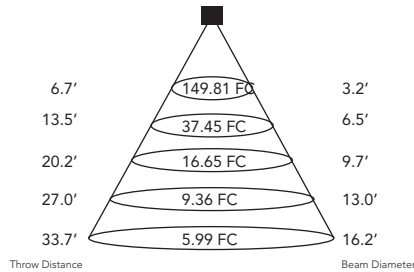

Zone	Lumens	%Lamp	%Luminaire
0-30	1,136.4	72.4%	72.4%
0-40	1,416.0	90.2%	90.2%
0-60	1,557.0	99.2%	99.2%
60-90	12.5	0.8%	0.8%
0-90	1,569.5	100%	100%

Zone Lumen Summary

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

# PRIME


PRIME 3" LED ARCHITECTURAL ROUND  
FLANGELESS ADJUSTABLE

## AT-A-GLANCE TECHNICAL INFORMATION

3" PRIME WALL WASH

### RPA - 7L 12° Beam, Round Accent

TEST DATE	2019-07-12
SERIES	RPA3-7L-30K-12°- Round Accent
LUMENS	699 LM
WATTS	10 W
CCT	3000K

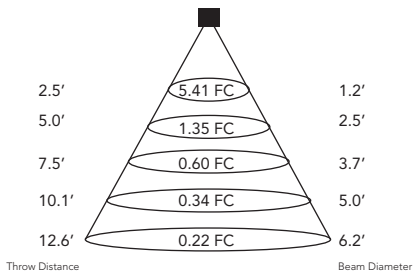


Zone	Lumens	%Lamp	%Luminaire
0-30	358.0	51.2%	51.2%
0-40	615.2	88%	88%
0-60	693.7	99.2%	99.2%
60-90	5.5	0.8%	0.8%
0-90	699.2	100%	100%

Zone Lumen Summary

### RPA - 7L 22° Beam, Round Accent

TEST DATE	2019-07-12
SERIES	RPA3-7L-30K-22°- Round Accent
LUMENS	699.5 LM
WATTS	10 W
CCT	3000K

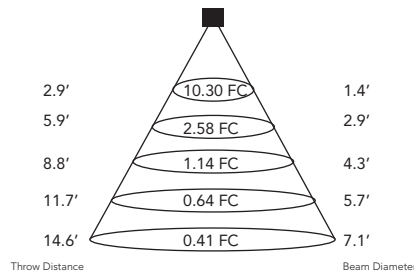


Zone	Lumens	%Lamp	%Luminaire
0-30	373.7	53.4%	53.4%
0-40	614.8	87.9%	87.9%
0-60	693.3	99.1%	99.1%
60-90	6.1	0.9%	0.9%
0-90	699.4	100%	100%

Zone Lumen Summary

### RPA - 7L 27° Beam, Round Accent

TEST DATE	2019-07-12
SERIES	RPA3-7L-30K-27°- Round Accent
LUMENS	757.1 LM
WATTS	10 W
CCT	3000K

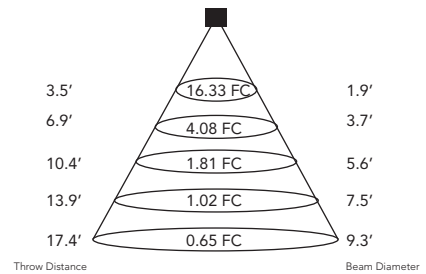


Zone	Lumens	%Lamp	%Luminaire
0-30	443.9	58.6%	58.7%
0-40	670.2	88.5%	88.6%
0-60	751.1	99.2%	99.3%
60-90	5.3	0.7%	0.7%
0-90	756.5	99.9%	100%

Zone Lumen Summary

### RPA - 7L 35° Beam, Round Accent

TEST DATE	2019-07-12
SERIES	RPA3-7L-30K-35°- Round Accent
LUMENS	794.3 LM
WATTS	10 W
CCT	3000K

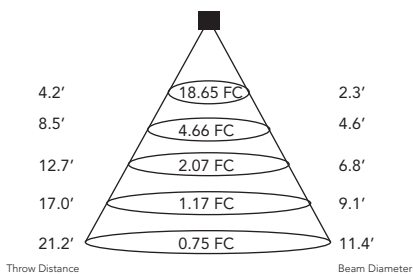


Zone	Lumens	%Lamp	%Luminaire
0-30	401.9	50.6%	50.6%
0-40	645.3	81.2%	81.3%
0-60	787.7	99.2%	99.2%
60-90	6.5	0.8%	0.8%
0-90	794.2	100%	100%

Zone Lumen Summary

### RPA - 7L 45° Beam, Round Accent

TEST DATE	2019-07-12
SERIES	RPA3-7L-30K-45°- Round Accent
LUMENS	727.5 LM
WATTS	10 W
CCT	3000K

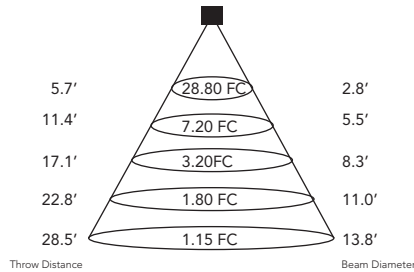

Zone	Lumens	%Lamp	%Luminaire
0-30	368.3	50.6%	50.6%
0-40	562.5	77.3%	77.3%
0-60	715.5	98.3%	98.3%
60-90	11.9	1.6%	1.6%
0-90	727.4	100%	100%

Zone Lumen Summary

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

# PRIME


PRIME 3" LED ARCHITECTURAL ROUND  
FLANGELESS ADJUSTABLE

## AT-A-GLANCE TECHNICAL INFORMATION

3" PRIME WALL WASH

### RPA - 10L 12° Beam, Round Accent

TEST DATE	2019-07-12
SERIES	RPA3-10L-30K-12°- Round Accent
LUMENS	947.5 LM
WATTS	14 W
CCT	3000K

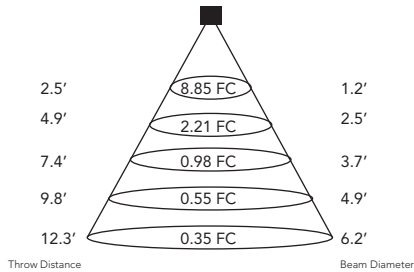


Zone	Lumens	%Lamp	%Luminaire
0-30	502.4	53%	53.1%
0-40	845.5	89.2%	98.3%
0-60	939.6	99.2%	99.3%
60-90	6.9	0.7%	0.7%
0-90	946.5	99.9%	100%

Zone Lumen Summary

### RPA - 10L 22° Beam, Round Accent

TEST DATE	2019-07-12
SERIES	RPA3-10L-30K-22°- Round Accent
LUMENS	944.2 LM
WATTS	14 W
CCT	3000K

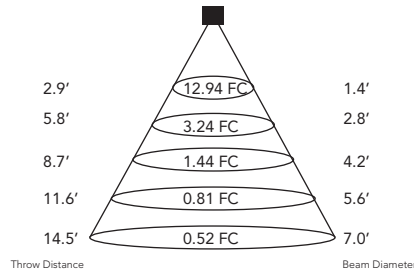


Zone	Lumens	%Lamp	%Luminaire
0-30	461.9	48.9%	49%
0-40	812.7	86.1%	86.1%
0-60	935.0	99%	99.1%
60-90	8.6	0.9%	0.9%
0-90	943.6	99.9%	100%

Zone Lumen Summary

### RPA - 10L 27° Beam, Round Accent

TEST DATE	2019-07-12
SERIES	RPA3-10L-30K-27°- Round Accent
LUMENS	1015.4 LM
WATTS	14 W
CCT	3000K

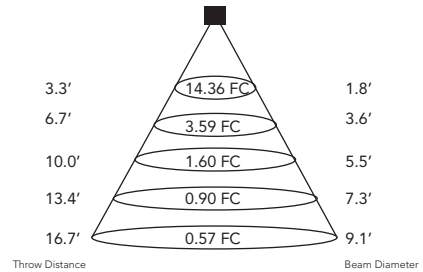


Zone	Lumens	%Lamp	%Luminaire
0-30	473.7	46.7%	46.7%
0-40	830.2	81.8%	81.8%
0-60	1,005.4	99%	99.1%
60-90	9.3	0.9%	0.9%
0-90	1,014.7	99.9%	100%

Zone Lumen Summary

### RPA - 10L 35° Beam, Round Accent

TEST DATE	2019-07-12
SERIES	RPA3-10L-30K-35°- Round Accent
LUMENS	1066.2 LM
WATTS	14 W
CCT	3000K

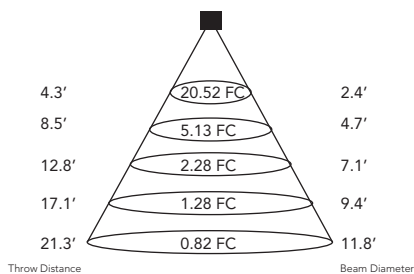


Zone	Lumens	%Lamp	%Luminaire
0-30	533.2	50%	50%
0-40	854.0	80.1%	80.1%
0-60	1,055.5	99%	99.1%
60-90	10.0	0.9%	0.9%
0-90	1,065.5	99.9%	100%

Zone Lumen Summary

### RPA - 10L 45° Beam, Round Accent

TEST DATE	2019-07-12
SERIES	RPA3-10L-30K-45°- Round Accent
LUMENS	977.1 LM
WATTS	14 W
CCT	3000K

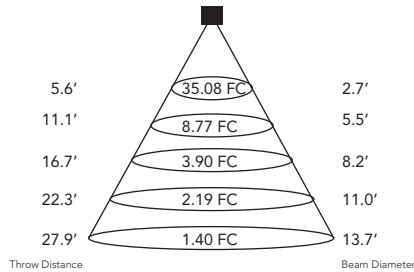

Zone	Lumens	%Lamp	%Luminaire
0-30	482.3	49.4%	49.4%
0-40	746.5	76.4%	76.4%
0-60	960.1	98.3%	98.3%
60-90	16.4	1.7%	1.7%
0-90	976.5	99.9%	100%

Zone Lumen Summary

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

# PRIME


PRIME 3" LED ARCHITECTURAL ROUND  
FLANGELESS ADJUSTABLE

3" PRIME WALL WASH

## AT-A-GLANCE TECHNICAL INFORMATION

### RPA - 14L 12° Beam, Round Accent

TEST DATE 2019-07-12  
SERIES RPA3-14L-30K-12°- Round Accent  
LUMENS 1310.1 LM  
WATTS 20 W  
CCT 3000K

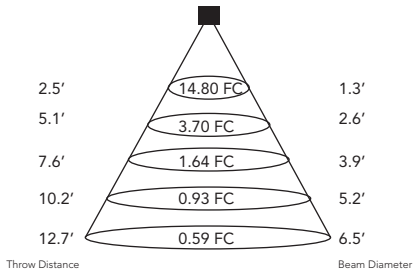


Zone	Lumens	%Lamp	%Luminaire
0-30	793.9	60.6%	60.7%
0-40	1,200.7	91.6%	91.8%
0-60	1,300.1	99.2%	99.4%
60-90	8.4	0.6%	0.6%
0-90	1,308.5	99.9%	100%

Zone Lumen Summary

### RPA - 14L 22° Beam, Round Accent

TEST DATE 2019-07-12  
SERIES RPA3-14L-30K-22°- Round Accent  
LUMENS 1300.5 LM  
WATTS 20 W  
CCT 3000K

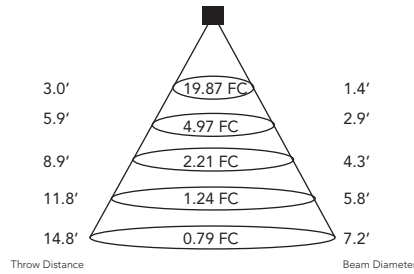


Zone	Lumens	%Lamp	%Luminaire
0-30	658.8	50.7%	50.7%
0-40	1,128.3	86.8%	86.8%
0-60	1,287.7	99%	99.1%
60-90	12.0	0.9%	0.9%
0-90	1,299.6	99.9%	100%

Zone Lumen Summary

### RPA - 14L 27° Beam, Round Accent

TEST DATE 2019-07-12  
SERIES RPA3-14L-30K-27°- Round Accent  
LUMENS 1342.3 LM  
WATTS 20 W  
CCT 3000K

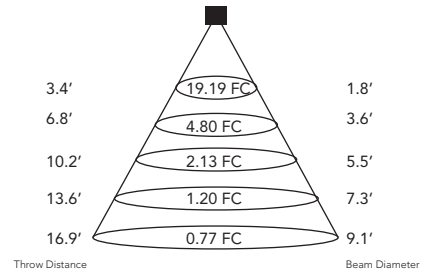


Zone	Lumens	%Lamp	%Luminaire
0-30	640.4	47.7%	47.7%
0-40	1,106.2	82.4%	82.4%
0-60	1,329.4	99%	99%
60-90	12.5	0.9%	0.9%
0-90	1,341.9	100%	100%

Zone Lumen Summary

### RPA - 14L 35° Beam, Round Accent

TEST DATE 2019-07-12  
SERIES RPA3-14L-30K-35°- Round Accent  
LUMENS 1417.1 LM  
WATTS 20 W  
CCT 3000K

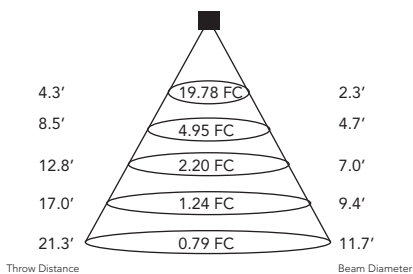


Zone	Lumens	%Lamp	%Luminaire
0-30	630.5	44.5%	44.5%
0-40	1,074.1	75.8%	75.8%
0-60	1,399.6	98.8%	98.8%
60-90	17.1	1.2%	1.2%
0-90	1,416.7	100%	100%

Zone Lumen Summary

### RPA - 14L 45° Beam, Round Accent

TEST DATE 2019-07-12  
SERIES RPA3-14L-30K-45°- Round Accent  
LUMENS 1288.4 LM  
WATTS 20 W  
CCT 3000K

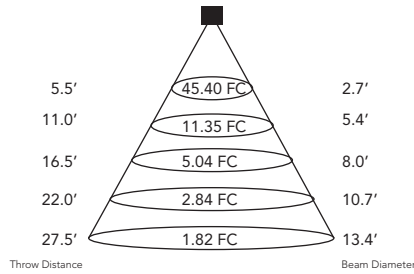

Zone	Lumens	%Lamp	%Luminaire
0-30	607.7	47.2%	47.2%
0-40	962.4	74.7%	74.7%
0-60	1,263.6	98.1%	98.1%
60-90	24.6	1.9%	1.9%
0-90	1,288.2	100%	100%

Zone Lumen Summary

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)