



PRIME

PRIME 4" LED ARCHITECTURAL SQUARE FLANGED WALL WASH

JOB INFORMATION	TYPE:
	CATALOG NO.
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:

USE OF PRODUCT

The 4" Prime Wall Wash Series Downlight is the ideal product for energy efficient lighting in commercial and residential applications where wall washing is required. Available in an assortment of color temperatures, optics, lumen outputs, and dimmable driver options.

PRIME FEATURES

Color Temperature: 2700K, 3000K, 3500K, or 4000K
SDCM: 2 step binning
Color Rendering Index: 93+ CRI
Optical Lens: 18°, 30°, 50°, 80°
Trim: Die cast or anodized
LED Life: 50,000 Hours
LED Type: Cree LED
Driver Info: 120-277V, 50/60 Hz, PF>0.9, THD<0.20
Warranty: 5 year limited warranty

LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. Light engine provides a quick disconnect with locking strain relief to housing.

FRAME CONSTRUCTION

Constructed from 16 gauge heavy duty powder coated cold rolled steel frame with a large access junction box.

ADJUSTMENT

- Light engine locked at 25° tilt, consult factory for other tilt setting.
- Housing provides for 360° locking rotation
- Aperture collar adjusts 15°± horizontally within frame for square ceiling alignment
- Collar notch allows for easy alignment for square applications.
- Aperture collar compatible up to 1½" ceiling thickness.
- Accommodation for 2" or 3" ceiling thickness available upon request.

OPTICS

Field replaceable optical lens available in 18°, 30°, 50°, and 80°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 Maximum).

DIMMING

Available in 8 driver selections. **(ID)** Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. **(PEQ0)** Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. **(LDE1)** Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. **(LTE)** Lutron Hi-Lume 1% 2-wire, 120V. **(L3DA)** Hi-Lume 1% EcoSystem/3-Wire L3D Driver **(EEI)** eldoLED Eco 1% Dim (0-10V), 120-277V. **(EDIO)** eldoLED Solo 0.1% Dim(0-10V), 120-277V. **(EDID)** eldoLED Solo 0.1% Dim(DALI), 120-277V

THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C.

EMERGENCY BATTERY

Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch in 800 or 1700 delivered lumens.

TRIM OPTIONS

- All trims are self flanged die cast or anodized.
- Trim includes standard frosted acrylic diffuser.
- 12% lumens increase if remove standard frosted acrylic diffuser in field.
- Optical Enhancer reflects light evenly across the diffusion lens.
- Trims available in round or square in an assortment of standard or made to order finishes.

LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada
- Energy Star
- Dry/Damp/Wet location rated.
- Title 24, JA8 Compliant
- 5 Year limited warranty



HOUSING ORDERING INFORMATION

Series	Lumens	Color Temp	Voltage	Dimming	Optical Lens ⁹	Filter
PRIME SERIES	8L ¹ - 820 lm	27 - 2700K	UNV - 120-277V	ID ³ - Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)	18 - 18°	None - Leave blank
	9L ¹ - 955 lm	30 - 3000K	120 - 120V		30 - 30°	
	13L ¹ - 1305 lm	35 - 3500K	347 ⁷ - 347V	PEQ0 ⁴ - Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming LDE1 ⁶ - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming LTE ^{5,6} - Lutron Hi-Lume 1% 2-wire L3DA - Hi-lume 1% EcoSystem/3-Wire L3D Driver EEI ^{7,8} - eldoLED Eco 1% Dim (0-10V) EDIO ^{7,8} - eldoLED Solo 0.1% Dim (0-10V) EDID ^{7,8} - eldoLED Solo 0.1% Dim (DALI)	50 - 50°	H - Honeycomb
	16L ¹ - 1695 lm	40 - 4000K			80 - 80°	S - Solite filter
	20L ¹ - 2010 lm					
	24L ¹ - 2455 lm					
	28L ¹ - 2825 lm					
29L ¹ - 2900 lm						

Housing Type	Aperture	Frame Accessories	Collar	Option
NC - Non-IC New Construction IC ¹⁰ - IC Air-tight New Construction	SFW - Square Flanged Wall Wash	C - C Channel bar hanger B - Flat bar hanger	Blank - 1.5" Depth 20 - 2" Depth 30 - 3" Depth MTO - Made to order	EI8 - Emergency battery with integral switch(800 Lumens) ER8 - Emergency battery with remote switch (800 Lumens) EI17 - Emergency battery with integral switch(1700 Lumens) ER17 - Emergency battery with remote switch (1700 Lumens) FCJS-E - Vive wireless individual controller(Ecosystem) FCJS-0 - Vive wireless individual controller(0-10) CP ¹⁰ - Chicago Plenum

TRIM ORDERING INFORMATION

Aperture Size / Shape / Trim Type / Style	Bevel / Flange Finish	Options
4SFA 4SFA - 4" Square Flange Accent	W-W - White bevel / white flange H-W - Haze bevel / white flange B-B - Black bevel / black flange H-H - Haze bevel / haze flange S-S - Specular clear bevel / specular clear flange WE-WE - Wheat bevel / wheat flange MTO - Made to order	WL - Wet location

1. Compatible with IC new construction housing.
2. Step down transformer required.
3. Intelligent Drive is the standard driver.
4. Driver must not exceed 1305 lm
5. 120V only.
6. Inapplicable to 2900 Lumen offering.
7. Must specify logarithmic or linear eldoLED diver.
8. Confirm dimming curve: linear or logarithmic.
9. Without standard frosted acrylic diffuser.
10. Compatible up to 1695 lumens.

PRIME

PRIME 4" LED ARCHITECTURAL
SQUARE FLANGED WALL WASH

JOB INFORMATION	TYPE:
	CATALOG NO.:
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:

4" PRIME WALL WASH



LUMEN CHART

Wattage	Delivered Lumens	Voltage	CRI
11W	820 Lm	120-277V	93+
16W	955 Lm	120-277V	93+
20W	1305 Lm	120-277V	93+
30W	1695 Lm	120-277V	93+
31W	2010 Lm	120-277V	93+
38W	2455 Lm	120-277V	93+
45W	2825 Lm	120-277V	93+
58W	2900 Lm	120-277V	93+

*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.
**Lumens will vary based on CCT, optical lens, and bevel finish.


DIMENSION

Trim Accent Details

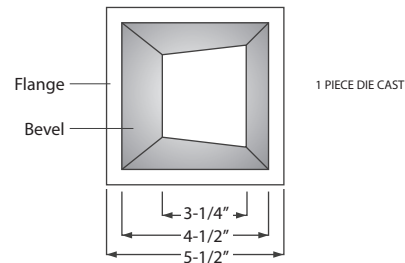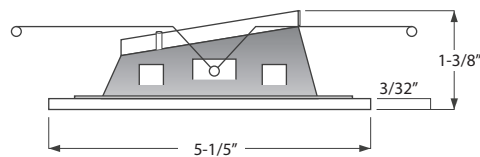


LED HOLDER & FILTER DIMENSION


LED Holder and Filter

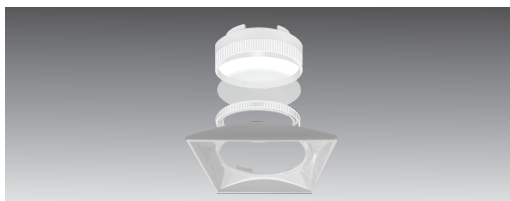

Filter



LED Holder



Light Enhancer

PRIME


PRIME 4" LED ARCHITECTURAL
SQUARE FLANGED WALL WASH

JOB INFORMATION	TYPE:
	CATALOG NO.:
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:


4" PRIME WALL WASH

HOUSING DIMENSION

IC Housing Details

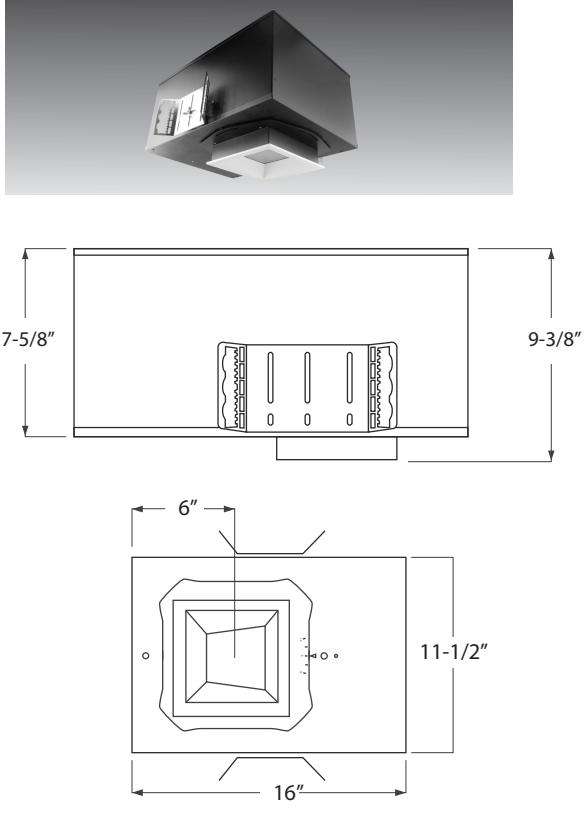


Non-IC Housing Details

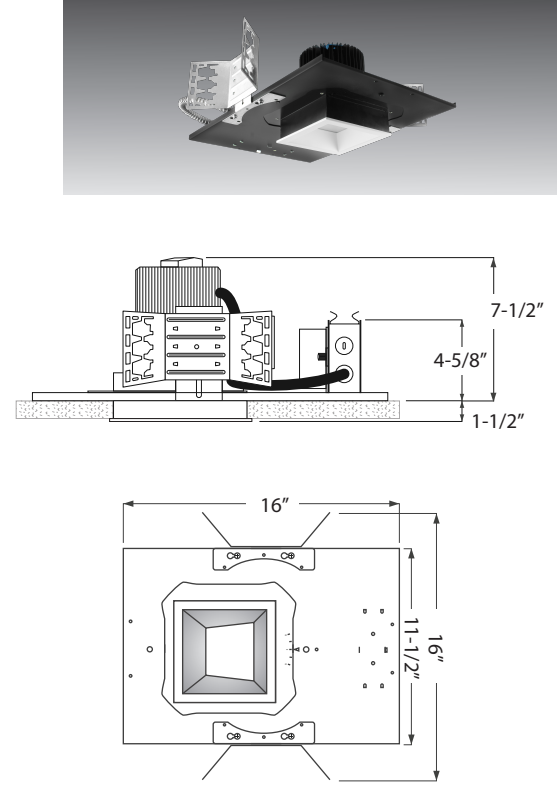

Ceiling Cut-out: 5-3/16 X 5-3/16"
Maximum Ceiling Thickness: 1-1/2"
Minimum Ceiling Thickness: 1/2"
Consult factory for custom ceiling thickness

COLLAR DEPTH PER CEILING THICKNESS

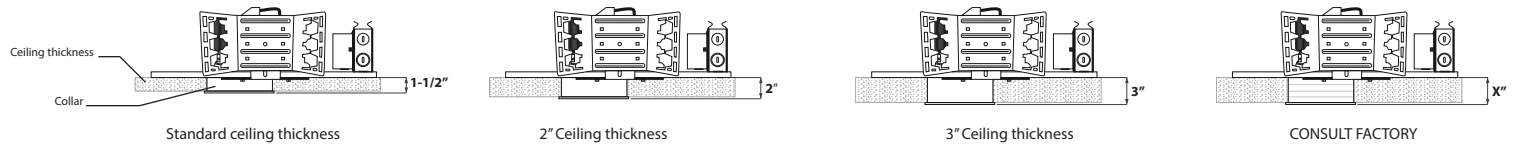

PRIME


PRIME 4" LED ARCHITECTURAL SQUARE FLANGED WALL WASH

4" PRIME WALL WASH

IES TECH INFO AT A GLANCE

RPA - 8L 18° BEAM


TEST DATE	2020-3-23
SERIES	RPA4-8L-30K-18°-SFW
LUMENS	766.5 LM
WATTS	11.90 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	331.1	43.2%	43.2%
0-40	600.1	78.3%	78.3%
0-60	738.7	96.4%	96.4%
60-90	27.2	3.6%	3.6%
0-90	766.0	99.9%	100%

RPA - 8L 30° BEAM


TEST DATE	2020-3-23
SERIES	RPA4-8L-30K-30°-SFW
LUMENS	820.1 LM
WATTS	11.90 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	354.8	43.3%	43.3%
0-40	626.9	76.4%	76.5%
0-60	791.9	96.6%	96.6%
60-90	27.5	3.4%	3.4%
0-90	819.4	99.9%	100%

RPA - 8L 60° BEAM


TEST DATE	2020-3-23
SERIES	RPA4-8L-30K-60°-SFW
LUMENS	712.5 LM
WATTS	11.8 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	336.5	47.2%	47.3%
0-40	537.4	75.4%	75.5%
0-60	686.4	96.3%	96.4%
60-90	25.7	3.6%	3.6%
0-90	712.1	99.9%	100%

RPA - 8L 80° BEAM


TEST DATE	2020-3-23
SERIES	RPA4-8L-30K-80°-SFW
LUMENS	622 LM
WATTS	11.9 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	301.8	48.5%	48.5%
0-40	459.3	73.8%	73.9%
0-60	596.6	95.9%	95.9%
60-90	25.2	4.1%	4.1%
0-90	621.8	100%	100%

RPA - 9L 18° BEAM


TEST DATE	2020-3-23
SERIES	RPA4-9L-30K-18°-SFW
LUMENS	870.7 LM
WATTS	16.01 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	465.7	53.5%	53.5%
0-40	644.7	74%	74.1%
0-60	828.8	95.2%	95.2%
60-90	41.7	4.8%	4.8%
0-90	870.5	100%	100%

RPA - 9L 30° BEAM


TEST DATE	2020-3-23
SERIES	RPA4-9L-30K-30°-SFW
LUMENS	953.8 LM
WATTS	16.02 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	505.5	53%	53%
0-40	703.4	73.8%	73.8%
0-60	907.9	95.2%	95.2%
60-90	45.3	4.8%	4.8%
0-90	953.3	100%	100%

RPA - 9L 60° BEAM


TEST DATE	2020-3-23
SERIES	RPA4-9L-30K-60°-SFW
LUMENS	759.8 LM
WATTS	16.00 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	388.0	51.1%	51.1%
0-40	550.2	72.4%	72.4%
0-60	720.4	94.8%	94.9%
60-90	39.1	5.1%	5.1%
0-90	759.5	100%	100%

RPA - 9L 80° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-9L-30K-80°-SFW
LUMENS	584.8 LM
WATTS	16.00 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	288.4	49.3%	49.3%
0-40	414.7	70.9%	70.9%
0-60	551.7	94.3%	94.4%
60-90	32.9	5.6%	5.6%
0-90	584.6	100%	100%

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

PRIME


PRIME 4" LED ARCHITECTURAL SQUARE FLANGED WALL WASH

4" PRIME WALL WASH

IES TECH INFO AT A GLANCE

RPA - 13L 18° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-13L-30K-18°-SFW
LUMENS	1226 LM
WATTS	20.67 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	571.8	46.6%	46.7%
0-40	988.0	80.6%	80.7%
0-60	1,183.4	96.5%	96.6%
60-90	41.2	3.4%	3.4%
0-90	1,224.6	99.9%	100%

Zone Lumen Summary

RPA - 13L 30° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-13L-30K-30°-SFW
LUMENS	1305.6 LM
WATTS	20.67 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	607.4	46.5%	46.6%
0-40	1,030.3	78.9%	79%
0-60	1,263.4	96.8%	96.8%
60-90	41.2	3.2%	3.2%
0-90	1,304.6	99.9%	100%

Zone Lumen Summary

RPA - 13L 60° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-13L-30K-60°-SFW
LUMENS	1120.7 LM
WATTS	20.71 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	532.5	47.5%	47.5%
0-40	847.5	75.6%	75.7%
0-60	1,078.9	96.3%	96.3%
60-90	41.1	3.7%	3.7%
0-90	1,119.9	99.9%	100%

Zone Lumen Summary

RPA - 13L 80° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-13L-30K-80°-SFW
LUMENS	996.8 LM
WATTS	20.78 W
CCT	3000K

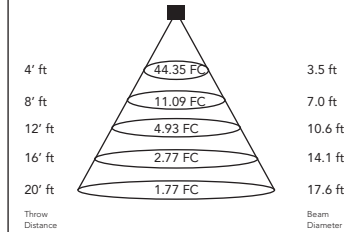


Zone	Lumens	%Lamp	%Luminaire
0-30	479.2	48.1%	48.1%
0-40	732.2	73.4%	73.5%
0-60	955.0	95.8%	95.8%
60-90	41.7	4.2%	4.2%
0-90	996.7	100%	100%

Zone Lumen Summary

RPA - 16L 18° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-16L-30K-18°-SFW
LUMENS	1591 LM
WATTS	29.60 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	731.3	46%	46%
0-40	1,273.8	80.1%	80.2%
0-60	1,534.3	96.4%	96.6%
60-90	54.7	3.4%	3.4%
0-90	1,588.9	99.9%	100%

Zone Lumen Summary

RPA - 16L 30° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-16L-30K-30°-SFW
LUMENS	1694.8 LM
WATTS	29.57 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	778.4	45.9%	46%
0-40	1,329.7	78.5%	78.5%
0-60	1,639.6	96.7%	96.8%
60-90	54.0	3.2%	3.2%
0-90	1,693.6	99.9%	100%

Zone Lumen Summary

RPA - 16L 60° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-16L-30K-60°-SFW
LUMENS	1459.7 LM
WATTS	29.59 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	675.5	46.3%	46.3%
0-40	1,088.7	74.6%	74.6%
0-60	1,404.7	96.2%	96.2%
60-90	54.8	3.8%	3.8%
0-90	1,459.5	100%	100%

Zone Lumen Summary

RPA - 16L 80° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-16L-30K-80°-SFW
LUMENS	1265.5 LM
WATTS	29.57 W
CCT	3000K

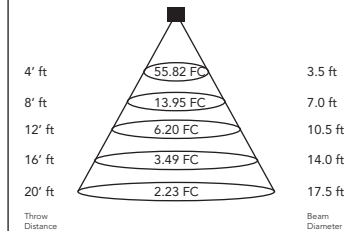

Zone	Lumens	%Lamp	%Luminaire
0-30	607.1	48%	48%
0-40	929.0	73.4%	73.4%
0-60	1,211.8	95.8%	95.8%
60-90	53.6	4.2%	4.2%
0-90	1,265.4	100%	100%

Zone Lumen Summary

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

PRIME


PRIME 4" LED ARCHITECTURAL SQUARE FLANGED WALL WASH

4" PRIME WALL WASH

IES TECH INFO AT A GLANCE

RPA - 20L 18° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-20L-30K-18°-SFW
LUMENS	1870 LM
WATTS	28.54 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	950.8	50.8%	50.9%
0-40	1,537.0	82.2%	82.2%
0-60	1,810.4	96.8%	96.8%
60-90	59.3	3.2%	3.2%
0-90	1,869.6	100%	100%

Zone Lumen Summary

RPA - 20L 30° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-20L-30K-30°-SFW
LUMENS	2012.1 LM
WATTS	28.55 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	1,011.3	50.3%	50.3%
0-40	1,629.8	81%	81.1%
0-60	1,952.1	97%	97.1%
60-90	58.6	2.9%	2.9%
0-90	2,010.7	99.9%	100%

Zone Lumen Summary

RPA - 20L 60° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-20L-30K-60°-SFW
LUMENS	1749.47 LM
WATTS	28.53 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	881.2	50.4%	50.4%
0-40	1,360.1	77.7%	77.8%
0-60	1,688.8	96.5%	96.6%
60-90	59.9	3.4%	3.4%
0-90	1,748.7	100%	100%

Zone Lumen Summary

RPA - 20L 80° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-20L-30K-80°-SFW
LUMENS	1540.7 LM
WATTS	28.46 W
CCT	3000K

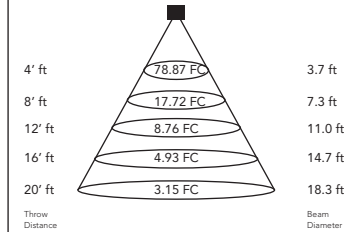


Zone	Lumens	%Lamp	%Luminaire
0-30	785.9	51%	51.1%
0-40	1,172.0	76.1%	76.2%
0-60	1,478.4	96%	96.1%
60-90	60.0	3.9%	3.9%
0-90	1,538.4	99.9%	100%

Zone Lumen Summary

RPA - 24L 18° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-24L-30K-18°-SFW
LUMENS	2298.2 LM
WATTS	37.79 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	1,062.6	46.2%	46.3%
0-40	1,827.3	79.5%	79.6%
0-60	2,216.4	96.4%	96.5%
60-90	80.1	3.5%	3.4%
0-90	2,296.5	99.9%	100%

Zone Lumen Summary

RPA - 24L 30° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-24L-30K-30°-SFW
LUMENS	2453.9 LM
WATTS	37.72 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	1,130.1	46.1%	46.1%
0-40	1,914.4	78%	78%
0-60	2,374.4	96.8%	96.8%
60-90	79.1	3.2%	3.2%
0-90	2,453.5	100%	100%

Zone Lumen Summary

RPA - 24L 60° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-24L-30K-60°-SFW
LUMENS	2161.7 LM
WATTS	37.89 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	1,074.2	49.7%	49.7%
0-40	1,668.9	77.2%	77.3%
0-60	2,083.8	96.4%	96.5%
60-90	76.0	3.5%	3.5%
0-90	2,159.8	99.9%	100%

Zone Lumen Summary

RPA - 24L 80° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-24L-30K-80°-SFW
LUMENS	1955.7 LM
WATTS	38.08 W
CCT	3000K

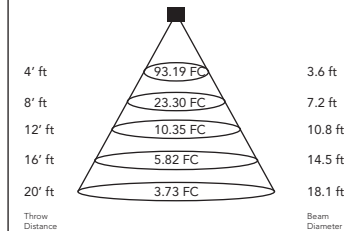

Zone	Lumens	%Lamp	%Luminaire
0-30	980.9	50.2%	50.2%
0-40	1,475.4	75.4%	75.4%
0-60	1,877.9	96%	96%
60-90	78.0	4%	4%
0-90	1,955.9	100%	100%

Zone Lumen Summary

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

PRIME


PRIME 4" LED ARCHITECTURAL SQUARE FLANGED WALL WASH

4" PRIME WALL WASH

IES TECH INFO AT A GLANCE

RPA - 28L 18° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-28L-30K-18°-SFW
LUMENS	2627.6 LM
WATTS	45.01 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	1,513.9	57.6%	57.7%
0-40	2,246.9	85.5%	85.5%
0-60	2,553.6	97.2%	97.3%
60-90	71.8	2.7%	2.7%
0-90	2,625.4	99.9%	100%

Zone Lumen Summary

RPA - 28L 30° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-28L-30K-30°-SFW
LUMENS	2825.6 LM
WATTS	44.91 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	1,585.2	56.1%	56.2%
0-40	2,390.7	84.6%	84.7%
0-60	2,751.2	97.4%	97.5%
60-90	71.7	2.5%	2.5%
0-90	2,822.8	99.9%	100%

Zone Lumen Summary

RPA - 28L 60° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-28L-30K-60°-SFW
LUMENS	2478.27 LM
WATTS	44.83 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	1,405.1	56.7%	56.8%
0-40	2,043.8	82.5%	82.6%
0-60	2,401.6	96.9%	97.1%
60-90	71.4	2.9%	2.9%
0-90	2,472.9	99.8%	100%

Zone Lumen Summary

RPA - 28L 80° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-28L-30K-80°-SFW
LUMENS	2149 LM
WATTS	44.81 W
CCT	3000K

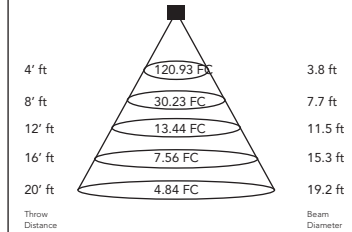


Zone	Lumens	%Lamp	%Luminaire
0-30	1,193.8	55.5%	55.6%
0-40	1,715.9	79.8%	79.9%
0-60	2,075.2	96.6%	96.6%
60-90	73.4	3.4%	3.4%
0-90	2,148.6	100%	100%

Zone Lumen Summary

RPA - 29L 18° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-29L-30K-18°-SFW
LUMENS	2709.4 LM
WATTS	57.65 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	1,201.5	44.3%	44.4%
0-40	2,055.0	75.8%	75.9%
0-60	2,600.9	96%	96.1%
60-90	105.6	3.9%	3.9%
0-90	2,706.5	99.9%	100%

Zone Lumen Summary

RPA - 29L 30° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-29L-30K-30°-SFW
LUMENS	2895.5 LM
WATTS	57.51 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	1,294.5	44.7%	44.8%
0-40	2,175.0	75.1%	75.3%
0-60	2,781.8	96.1%	96.3%
60-90	106.2	3.7%	3.7%
0-90	2,888.0	99.7%	100%

Zone Lumen Summary

RPA - 29L 60° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-29L-30K-60°-SFW
LUMENS	2685.2 LM
WATTS	57.45 W
CCT	3000K




Zone	Lumens	%Lamp	%Luminaire
0-30	1,311.2	48.8%	48.9%
0-40	2,041.1	76%	76.1%
0-60	2,583.6	96.2%	96.3%
60-90	100.0	3.7%	3.7%
0-90	2,683.6	99.9%	100%

Zone Lumen Summary

RPA - 29L 80° BEAM

TEST DATE	2020-3-23
SERIES	RPA4-29L-30K-80°-SFW
LUMENS	2464 LM
WATTS	57.52 W
CCT	3000K

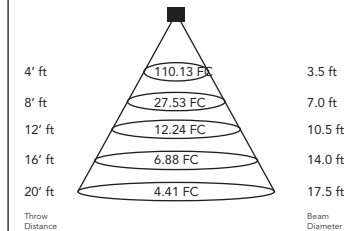

Zone	Lumens	%Lamp	%Luminaire
0-30	1,207.2	49%	49%
0-40	1,837.4	74.6%	74.6%
0-60	2,363.0	95.9%	95.9%
60-90	101.7	4.1%	4.1%
0-90	2,464.6	100%	100%

Zone Lumen Summary

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)