



RPA4-SL-10

PRIME SQUARE LUMINAIRE

PROJECT:


MODEL #:

LOCATION:


CONTACT:



DIMENSIONS



MOUNTING FEATURES

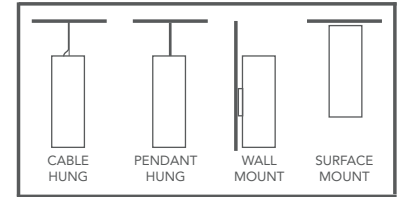

USE OF PRODUCT

PRIME Square Luminaire Series may be used in hospitality, commercial, retail, and residential applications. This product will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source

PRIME SQUARE LUMINAIRE FEATURES

LUMEN CHART

WATTAGE	LUMENS
11W	1035 lm
16W	1280 lm
20W	1625 lm
30W	2115 lm
31W	2480 lm

- Color Temperature: 2700K, 3000K, 3500K, or 4000K
- SDCM: 2 Step binning
- Color Rendering Index: 93 CRI Typical
- Optical Lens: 18°, 30°, 50°, 80°
- Bevel: Die cast with knife edge look
- LED Life: 50,000 hours
- LED Type: Cree LED for maximum light output
- Versatility: Interchangeable reflector
- Warranty: 5 Year Limited Warranty

LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management.

LED DRIVER

Durable dimmable driver provides high power factor with optimum thermal management to prevent damage caused by high temperature.

HOUSING

Rugged aluminum housing.

OPTICS

Field replaceable optical lens available in 18°, 30°, 50°, and 80°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 Maximum).

MOUNTING

The PRIME Cylinder Series may be cable hung, stem mount, surface mount or wall mounted.

DIMMING

Available in 10 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (PEQ1) Lutron Hi-Lume Premier Ecosystem 1% w/soft on, fade to black dimming, (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LTE) Lutron Hi-Lume 1% 2-wire, 120V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

LABELS / COMPLIANCE

- CSA Listed for US and Canada
- 5 year limited warranty.

ORDERING INFO

RPA	4	SL						
Series	Diameter	Shape	Length	Directional	Lumens	Color Temp.	Voltage	Dimming
PRIME	4 - 5"	SL - Square Luminaire	10 - 10"	DL - Down Light Up - Up Light	10L - 1035 lm 12L - 1280 lm 16L - 1625 lm 21L - 2115 lm 24L - 2480 lm	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	UNV - 120-277V	ID ¹ - Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive) PEQ0 - Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming PEQ1 - Lutron Hi-Lume Premier Ecosystem 1% w/soft on, fade to black dimming LDE1 - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming LDE5 - Lutron Hi-Lume 5% Ecosystem LTE ² - Lutron Hi-Lume 1% 2-wire EEI ^{3,4} - Hi-lume 1% EcoSystem/3-Wire L3D Driver L3DA - eldoLED Eco 1% Dim (0-10V) EDIO ^{3,4} - eldoLED Solo 0.1% Dim (0-10V) EDID ^{3,4} - eldoLED Solo 0.1% Dim (DALI)

Optical Lens ⁵	Filter	Bevel Finish	Luminaire Finish	Mounting	Option
18 - 18° 30 - 30° 50 - 50° 80 - 80°	None - Leave blank F - Frosted filter H - Honey comb S - Solite filter	W - White B - Black H - Haze S - Specular Clear WE - Wheat MTO - Made to order	BL - Black WH - White SL - Silver MTO - Made to order	PH ⁶ - Pendant Hung SC ⁷ - Single Cable DC - Double Cable TC - Triple Cable SM - Surface Mount WM - Wall Mount	EM ⁸ - Emergency battery

- Intelligent Drive is the standard driver.
- 120V only.
- Must specify logarithmic or linear eldoLED driver.
- Confirm dimming curve: linear or logarithmic.
- Without standard frosted acrylic diffuser
- 18" standard length, consult factory for other.
- 5ft standard cable length.
- Emergency battery only available in remote mount.

Rayon Lighting, Inc

1517 N. Alameda St
Compton, CA 90222
T: 323.446.2626
rayonlighting.com




©2020. Rayon lighting. All rights reserved.
Specification and product availability subject
to change without notice.
Revised 7/2/20

PRIME SQUARE LUMINAIRE

PRIME




TRIM HEIGHT

Trim Details

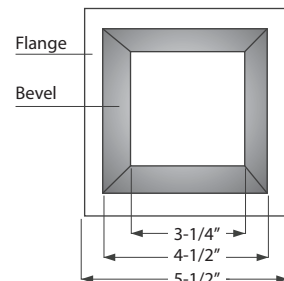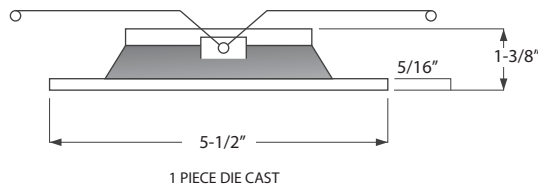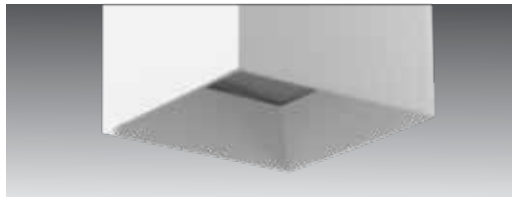


LED HOLDER & FILTER DIMENSION

LED Holder and Filter

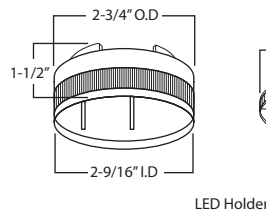

MOUNTING INFO

CABLE HUNG DIMENSION

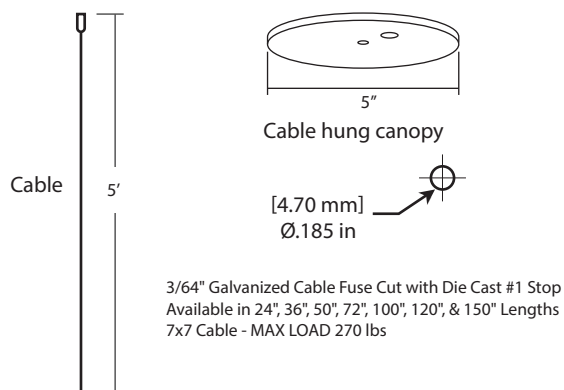

STEM MOUNT DIMENSION

