



VERSA COMMERCIAL

4" LED COMMERCIAL SINGLE SIDEKICK WALL WASH REMODEL

JOB INFORMATION

TYPE: _____

CATALOG NO. _____

PROJECT NAME: _____

COMMENTS: _____

PREPARED BY: _____

FEATURES

USE OF PRODUCT

The Versa Commercial Single Sidekick Wall Wash Series is the ideal product for energy efficient lighting in Non-IC Remodel applications where wall washing is required, such as corridors & hallways.

VERSA COMMERCIAL FEATURES

30° Single Sidekick Wall Wash

Wattage	Lumens	Voltage	CRI
11W	1035 lm	120-277V	93+
16W	1370 lm	120-277V	93+
20W	1605 lm	120-277V	93+
21W	1865 lm	120-277V	93+
30W	2095 lm	120-277V	93+
31W	2445 lm	120-277V	93+
38W	2940 lm	120-277V	93+
45W	3280 lm	120-277V	93+
57W	3850 lm	120-277V	93+

50° Single Sidekick Wall Wash

Wattage	Lumens	Voltage	CRI
11W	670 lm	120-277V	93+
16W	1205 lm	120-277V	93+
20W	1505 lm	120-277V	93+
21W	1785 lm	120-277V	93+
30W	1955 lm	120-277V	93+
31W	2310 lm	120-277V	93+
38W	2940 lm	120-277V	93+
45W	3090 lm	120-277V	93+
57W	3835 lm	120-277V	93+

Color Temperature: 2700K, 3000K, 3500K, or 4000K

SDCM: 2 step binning

Color Rendering Index: 93+ CRI

R9: 60+

LED Life: 50,000 hours

LED Type: Cree LED

Warranty: 5 year limited warranty

SIDEKICK TECHNOLOGY

Versa Commercial Single Sidekick Wall Wash utilizes angle bending diffuser technology that evenly redirects and distributes light for precision wall washing.

LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED engine is available in a multitude of optical lens allowing for easy optical control. LED mounted to aluminum heat sink for maximum life output and thermal management.

OPTICAL LENS (Field Replaceable)

Available in 30° and 50° beam angle.

FRAME CONSTRUCTION

Constructed from 16 gauge heavy duty powder coated cold rolled steel frame with a large access junction box.

DIMMING

Available in 8 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LTE) Hi-Lume 1% 2-wire, 120V (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

EMERGENCY BACKUP

Optional emergency backup available for a minimum of 90 minutes with remote test switch.

INSTALLATION

Non-IC housing. Installation must be kept at least 3" away from fixture.

LABELS/COMPLIANCE

-CSA Listed for US and Canada



ORDERING INFORMATION

Series	Lumens	Color Temp	Voltage	Dimming
RVC4SW-30 - 4" Versa Commercial 30° Single Wall Wash	10L - 1035 lm	27 - 2700K	UNV - 120-277V	ID ² - Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)
	13L - 1370 lm	30 - 3000K	1 - 120V	PEQ0 ³ - Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming
	16L - 1605 lm	35 - 3500K	3 ¹ - 347V	LDE1 ⁵ - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming
	18L - 1865 lm	40 - 4000K		LTE ^{4,5} - Hi-Lume 1% 2-wire
	20L - 2095 lm			L3DA - Hi-Lume 1% EcoSystem/3-Wire L3D Driver
	24L - 2445 lm			EEI ^{5,6} - eldoLED Eco 1% Dim (0-10V)
	29L - 2940 lm			EDIO ^{5,6} - eldoLED Solo 0.1% Dim (0-10V)
	32L - 3280 lm			EDID ^{5,6} - eldoLED Solo 0.1% Dim (DALI)
	38L - 3850 lm			
	RVC4SW-50 - 4" Versa Commercial 50° Single Wall Wash	9L - 970 lm		
12L - 1205 lm				
15L - 1505 lm				
17L - 1785 lm				
19L - 1955 lm				
23L - 2310 lm				
29L - 2940 lm				
30L - 3090 lm				

Single Wall Wash Trim	FR	Options
4TWS - White Single Wall Wash	FR - Remodel	ER8 - Emergency Battery with Remote Switch (800 Lumens)
4TSS - Specular Clear Single Wall Wash		ER17 - Emergency Battery with Remote Switch (1700 Lumens)
4THS - Haze Single Wall Wash		WL - Wet Location
MT0 - Made to Order		

1. Step down transformer required.
2. Intelligent Drive is the standard driver for the Versa Commercial.
3. Driver must not exceed 20W
4. 120V only.
5. Inapplicable to 3800 Lumen offering.
6. Must specify logarithmic or linear eldoLED diver.




www.rayonlighting.com
info@rayonlighting.com

Tel: 323.446.2626
Fax: 323.446.2606


Specification and product availability
subject to change without notice

PROJECT:
MODEL #:
LOCATION:
CONTACT:


DIMENSIONS

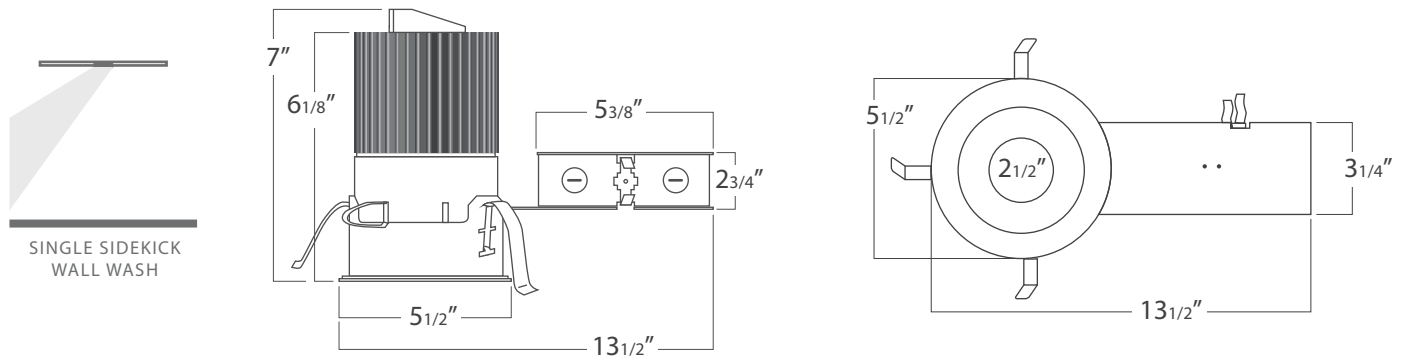

WALL WASH DIMENSIONS

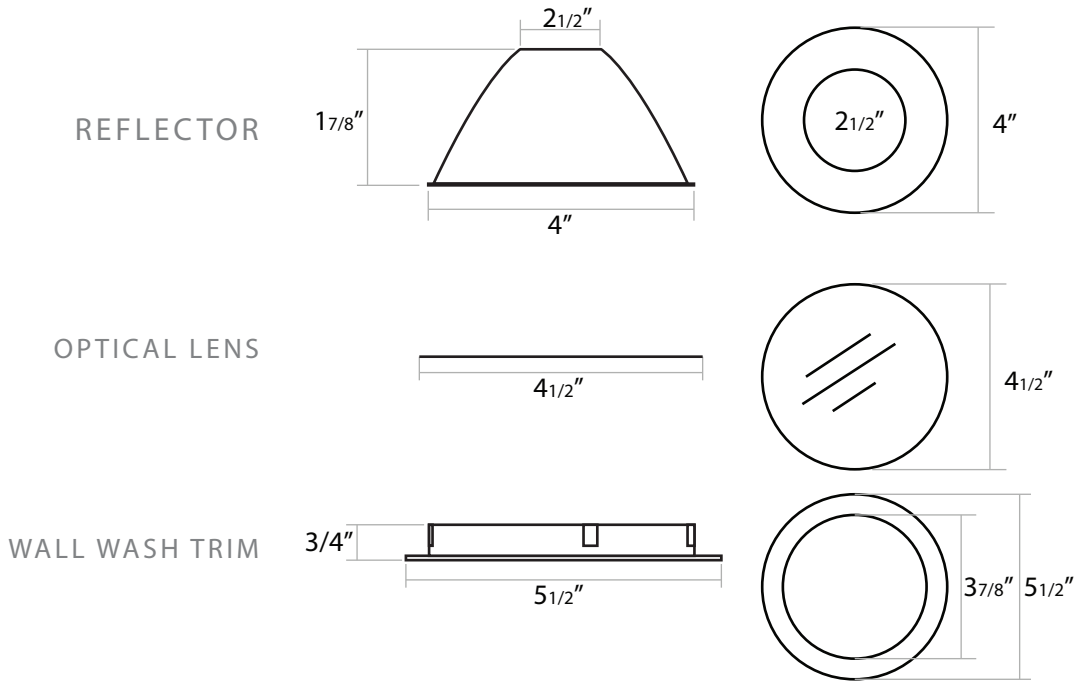

LED HEIGHT INSIDE DOWNLIGHT

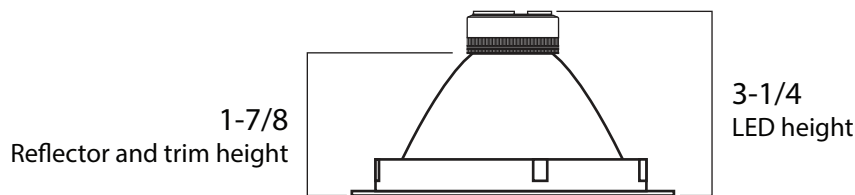

VERSA COMMERCIAL

4" LED COMMERCIAL SINGLE SIDEKICK WALL WASH
REMODEL

PROJECT:

MODEL #:

LOCATION:

CONTACT:

ANATOMY

