



VERSA COMMERCIAL

6" LED COMMERCIAL SINGLE SIDEKICK WALL WASH NEW CONSTRUCTION

JOB INFORMATION	TYPE:
	CATALOG NO.:
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:

FEATURES

USE OF PRODUCT

The Versa Commercial Single Sidekick Wall Wash Series is the ideal product for energy efficient lighting in Non-IC New Construction applications where wall washing is required, such as corridors & hallways.

VERSA COMMERCIAL FEATURES

30° Single Sidekick Wall Wash

Wattage	Lumens	Voltage	CRI
11W	1035 lm	120-277V	93+
16W	1385 lm	120-277V	93+
20W	1610 lm	120-277V	93+
21W	1875 lm	120-277V	93+
30W	2090 lm	120-277V	93+
31W	2470 lm	120-277V	93+
38W	2965 lm	120-277V	93+
45W	3290 lm	120-277V	93+
57W	3865 lm	120-277V	93+

50° Single Sidekick Wall Wash

Wattage	Lumens	Voltage	CRI
11W	975 lm	120-277V	93+
16W	1240 lm	120-277V	93+
20W	1515 lm	120-277V	93+
21W	1795 lm	120-277V	93+
30W	1970 lm	120-277V	93+
31W	2375 lm	120-277V	93+
38W	2785 lm	120-277V	93+
45W	3115 lm	120-277V	93+
57W	3850 lm	120-277V	93+

Color Temperature: 2700K, 3000K, 3500K, or 4000K

SDCM: 2 step binning
Color Rendering Index: 93+ CRI
R9: 60+

LED Life: 50,000 hours
LED Type: Cree LED
Warranty: 5 year limited warranty

SIDEKICK TECHNOLOGY

Versa Commercial Single Sidekick Wall Wash utilizes angle bending diffuser technology that evenly redirects and distributes light for precision wall washing.

LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED engine is available in a multitude of optical lens allowing for easy optical control. LED mounted to aluminum heat sink for maximum life output and thermal management.

OPTICAL LENS (Field Replaceable)
Available in 30° and 50° beam angle.

DIMMING

Available in 8 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LTE) Hi-Lume 1% 2-wire, 120V (L3DA) Hi-Lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

FRAME CONSTRUCTION

Constructed from 16 gauge heavy duty powder coated cold rolled steel frame with a large access junction box.

EMERGENCY BACKUP

Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch in 800 or 1700 delivered lumens

INSTALLATION

Non-IC housing. Installation must be kept at least 3" away from fixture.

LABELS/COMPLIANCE

-CSA Listed for US and Canada



ORDER INFORMATION

Series	Lumens	Color Temp	Voltage	Dimming
RVC6SW-30 - 6" Versa Commercial 30° Single Wall Wash	10L - 1035 lm	27 - 2700K	UNV - 120-277V	ID ² - Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive) PEQ0 ³ - Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming LDE1 ⁵ - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming LTE ^{4,5} - Hi-Lume 1% 2-wire L3DA - Hi-lume 1% EcoSystem/3-Wire L3D Driver EEI ^{5,6} - eldoLED Eco 1% Dim (0-10V) EDIO ^{5,6} - eldoLED Solo 0.1% Dim (0-10V) EDID ^{5,6} - eldoLED Solo 0.1% Dim (DALI)
	13L - 1385 lm	30 - 3000K	1 - 120V	
	16L - 1610 lm	35 - 3500K	3' - 347V	
	18L - 1875 lm	40 - 4000K		
	20L - 2090 lm			
	24L - 2470 lm			
	29L - 2965 lm			
	32L - 3290 lm			
	38L - 3865 lm			
RVC6SW-50 - 6" Versa Commercial 50° Single Wall Wash	9L - 975 lm			
	12L - 1240 lm			
	15L - 1515 lm			
	17L - 1795 lm			
	19L - 1970 lm			
	23L - 2375 lm			
	27L - 2785 lm			
	31L - 3115 lm			
	38L - 3850 lm			

Single Wall Wash Trim	Frame	Frame Accessories	Options
6TWS - White Single Wall Wash 6TSS - Specular Clear Single Wall Wash 6THS - Haze Single Wall Wash 6TBS - Black Single Wall Wash MTO - Made to Order	FN - New Construction	C - C Channel bar hanger B - Flat bar hanger WJ - Wood joist	ER8 - Emergency Battery with Remote Switch (800 Lumens) ER17 - Emergency Battery with Remote Switch (1700 Lumens) WL - Wet Location

- Step down transformer required.
- Intelligent Drive is the standard driver for the Versa Commercial.
- Driver must not exceed 20W
- 120V only.
- Inapplicable to 4000 Lumen offering.
- Must specify logarithmic or linear eldoLED diver.



www.rayonlighting.com
info@rayonlighting.com

Tel: 323.446.2626
Fax: 323.446.2606

Specification and product availability
subject to change without notice

03/21

6" SINGLE SIDEKICK WALL WASH NEW CONSTRUCTION

FRAME ACCESSORIES

WJ

Slotted Holes
allow for an
easier installation

4" up to 8" CKOs

Fits up to 26" stud spacings

Plate is offset, allowing for
adjustability with irregular
stud spacing

B




Flat Bar Hanger

27"

1/2"

C



C Channel Bar Hanger

VERSA COMMERCIAL

6" LED COMMERCIAL SINGLE SIDEKICK WALL WASH
NEW CONSTRUCTION


PROJECT:

MODEL #:



LOCATION:

CONTACT:

DIMENSIONS





SINGLE SIDEKICK
WALL WASH

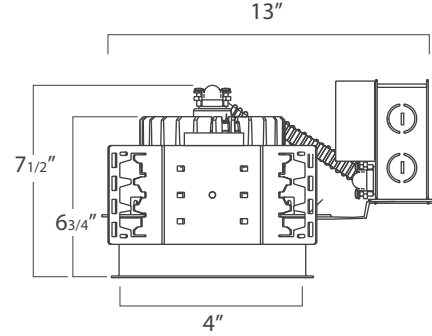
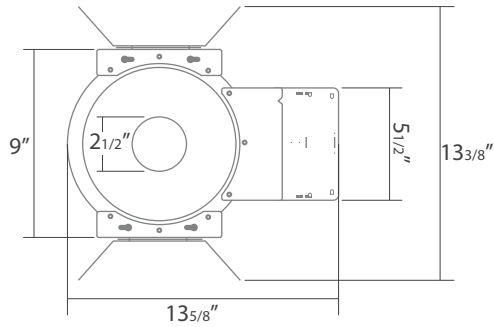


WALL WASH DIMENSIONS



REFLECTOR

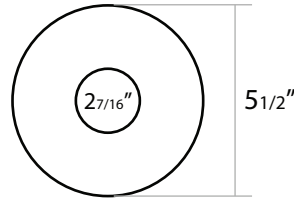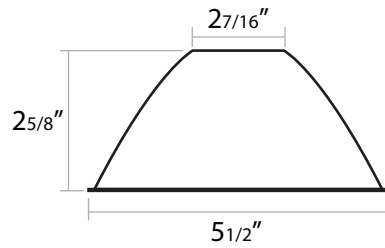


OPTICAL LENS



WALL WASH TRIM

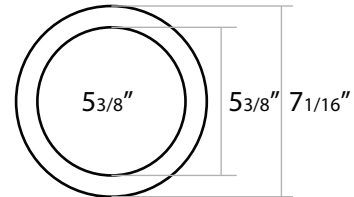

LED HEIGHT INSIDE DOWNLIGHT

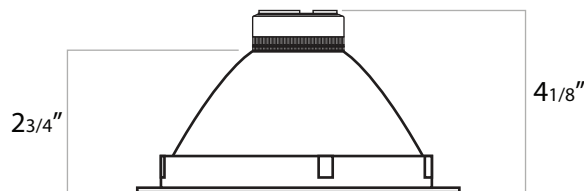

VERSA COMMERCIAL

6" LED COMMERCIAL SINGLE SIDEKICK WALL WASH
NEW CONSTRUCTION

PROJECT:

MODEL #:

LOCATION:

CONTACT:

ANATOMY

