



VERSA COMMERCIAL

6" LED COMMERCIAL DOUBLE SIDEKICK WALL WASH RETROFIT

JOB INFORMATION	TYPE:
	CATALOG NO.:
	PROJECT NAME:
	COMMENTS:
PREPARED BY:	

FEATURES

USE OF PRODUCT

The Versa Commercial Double Sidekick Wall Wash Series is the ideal product for energy efficient lighting in Non-IC Retrofit applications where double wall washing is required, such as corridors & hallways.

VERSA COMMERCIAL FEATURES

30° Double Sidekick Wall Wash

Wattage	Lumens	Voltage	CRI
11W	1020 lm	120-277V	93+
16W	1380 lm	120-277V	93+
20W	1590 lm	120-277V	93+
21W	1895 lm	120-277V	93+
30W	2090 lm	120-277V	93+
31W	2440 lm	120-277V	93+
38W	2940 lm	120-277V	93+
45W	3260 lm	120-277V	93+
57W	3840 lm	120-277V	93+

50° Double Sidekick Wall Wash

Wattage	Lumens	Voltage	CRI
6W	965 lm	120-277V	93+
16W	1225 lm	120-277V	93+
20W	1490 lm	120-277V	93+
21W	1765 lm	120-277V	93+
30W	1945 lm	120-277V	93+
31W	2345 lm	120-277V	93+
38W	2765 lm	120-277V	93+
45W	3100 lm	120-277V	93+
57W	3825 lm	120-277V	93+

Color Temperature: 2700K, 3000K, 3500K, or 4000K

SDCM: 2 step binning

Color Rendering Index: 93+ CRI

R9: 60+

LED Life: 50,000 hours

LED Type: Cree LED

Warranty: 5 year limited warranty

SIDEKICK TECHNOLOGY

Versa Commercial Double Sidekick Wall Wash utilizes angle bending diffuser technology that evenly redirects and distributes light for precision wall washing.

LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED engine is available in a multitude of optical lens allowing for easy optical control. LED mounted to aluminum heat sink for maximum life output and thermal management.

OPTICAL LENS (Field Replaceable)

Available in 30° and 50° beam angle.

DIMMING

Available in 8 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LTE) Hi-Lume 1% 2-wire, 120V (L3DA) Hi-Lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

VERSATILITY

The Versa Commercial Sidekick series provides for interchangeable wall wash trims in 30° or 50° double wall wash lens also with an assortment of finishes to achieve a particular look. The ability to field install and/or replace various trims makes the Versa Commercial Sidekick Series the most flexible commercial wallwash downlight in the industry.

EMERGENCY BACKUP

Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch in 800 or 1700 delivered lumens

INSTALLATION

Non-IC housing. Installation must be kept at least 3" away from fixture.

LABELS/COMPLIANCE

-CSA Listed for US and Canada



ORDERING INFORMATION

Series	Lumens	Color Temp	Voltage	Dimming
RVC6DW-30				
RVC6DW-30 - 6" Versa Commercial 30° Double Wall Wash	10L - 1020 lm 13L - 1380 lm 15L - 1590 lm 18L - 1895 lm 20L - 2090 lm 24L - 2440 lm 29L - 2940 lm 32L - 3260 lm 38L - 3840 lm	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	UNV - 120-277V 1 - 120V 3 ¹ - 347V	ID ² - Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive) PEQ0 ³ - Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming LDE1 ⁵ - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming LTE ^{4,5} - Hi-Lume 1% 2-wire L3DA - Hi-Lume 1% EcoSystem/3-Wire L3D Driver EEI ^{5,6} - eldoLED Eco 1% Dim (0-10V) EDIO ^{5,6} - eldoLED Solo 0.1% Dim (0-10V) EDID ^{5,6} - eldoLED Solo 0.1% Dim (DALI)
RVC6DW-50 - 6" Versa Commercial 50° Double Wall Wash	9L - 965 lm 12L - 1225 lm 14L - 1490 lm 17L - 1765 lm 19L - 1945 lm 23L - 2345 lm 27L - 2765 lm 31L - 3100 lm 38L - 3825 lm			

Double Wall Wash Trim	Frame	Options
6TWD - White Double Wall Wash 6TSD - Specular Clear Double Wall Wash 6THD - Haze Double Wall Wash 6TBD - Black Double Wall Wash MTO - Made to Order	AC - Retrofit	ER8 - Emergency Battery with Remote Switch (800 Lumens) ER17 - Emergency Battery with Remote Switch (1700 Lumens) WL - Wet Location

1. Step down transformer required.
2. Intelligent Drive is the standard driver for the Versa Commercial.
3. Driver must not exceed 20W
4. 120V only.
5. Inapplicable to 4000 Lumen offering.
6. Must specify logarithmic or linear eldoLED diver.






www.rayonlighting.com
info@rayonlighting.com

Tel: 323.446.2626
Fax: 323.446.2606



Specification and product availability
subject to change without notice

DIMENSIONS

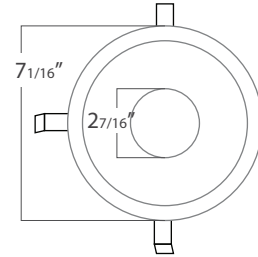
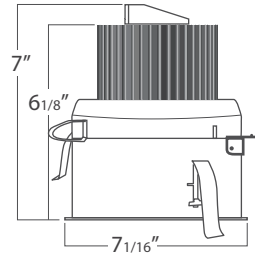


WALL WASH DIMENSIONS



REFLECTOR

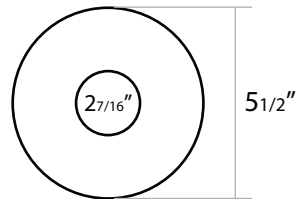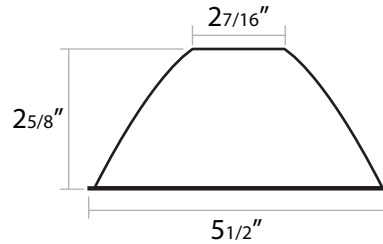


OPTICAL LENS



WALL WASH TRIM

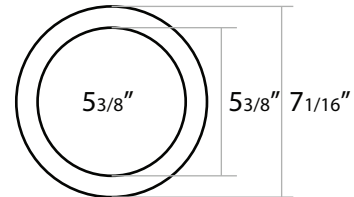

LED HEIGHT INSIDE DOWNLIGHT

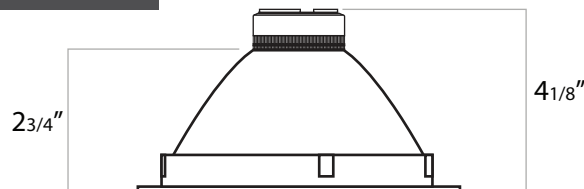

ANATOMY

