


PROJECT:	TYPE:	CATALOG #:	CYNE - - - - - UNV - - - -
			CYNE - - - - - WM2 - UNV - - - -

PROFILE

LIGHT SOURCE	7.0W, 10.0W, 14.0W, 21.0W
OPTICS	15°, 20°, 30°, 55°, 100°, ASYMMETRIC
CCT	2700K, 3000K, 3500K, 4000K (82 CRI)
CRI	82+ CRI
PERFORMANCE	UP TO 8287 PEAK CANDELA
VOLTAGE	UNIVERSAL 120-277 V
POWER	INTEGRATED POWER SUPPLY
DIMMING	0-10V
DIMENSIONS	11" X 7.375" X 5.25", 16" X 7.375" X 5.25"
WEIGHT	11" FIXTURE: 7.0LBS(3.2 KG), 16" FIXTURE: 14.0LBS(6.4 KG)
HOUSING	EXTRUDED ALUMINUM HOUSING
LENS	TEMPERED GLASS
FINISH	HIGH DURABILITY POWDER COATING
WARRANTY	5-YEAR LIMITED
OPERATING TEMP	-30° C TO 45° C
LUMEN MAINTENANCE	84,000 HOURS
CERTIFICATION	ETL AND cETL FOR WET LOCATION




STANDARD FINISHES

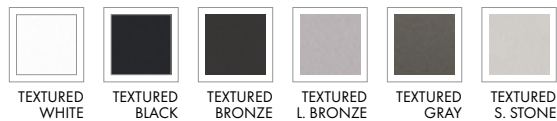

OPTICS

NOT ALL AVAILABLE OPTICS SHOWN

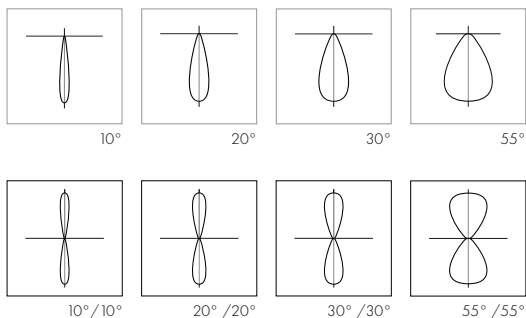


PERFORMANCE SAMPLE

[go to performance data >](#)

40K, 21W	15°	20°	30°	55°	100°
LUMENS	1990	1996	1949	1951	1937
CANDELA	8287	5113	3294	2560	845
EFFICACY	95 lm/W	95 lm/W	93 lm/W	93 lm/W	92 lm/W

DIMENSIONS

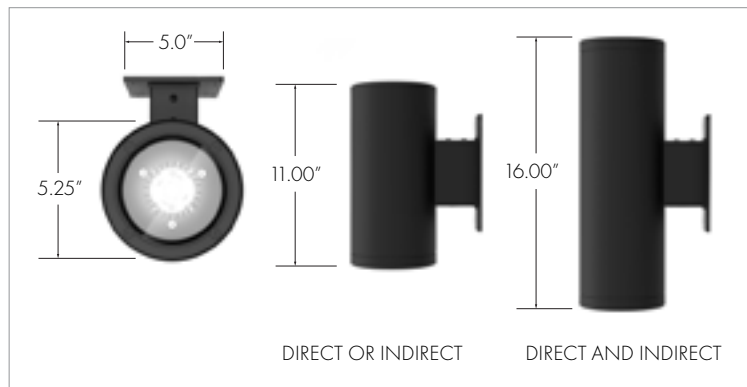

ACCESSORIES / OPTIONS



CORROSION RESISTANT FINISH

PROJECT:	TYPE:	CATALOG #:	CYNE - - - - - UNV - - - - -
			CYNE - - - - - WM2 - UNV - - - - -

SPECIFICATION

DIRECT OR INDIRECT (11" FIXTURE)

CYNE						UNV			
1	2	3	4	5	6	7	8	9	

1 FIXTURE	2 WATTAGE	3 CCT	4 OPTICS	5 MOUNTING	6 VOLTAGE	7 CONTROLS	8 FINISH	9 OPTIONS
CYNDER CYNE	7 WATTS 10 WATTS 14 WATTS 21 WATTS	2700K 3000K 3500K 4000K	15° 20° 30° 55° 100° ASYMMETRIC	CEILING, DOWNLIGHT WALL, DOWNLIGHT WALL, UPLIGHT PENDANT, DOWNLIGHT	UNIVERSAL 120V - 277V	NON-DIMMING 0-10V DIMMING	TEXTURED WHITE TEXTURED BLACK TEXTURED BRONZE TEXTURED LIGHT BRONZE TEXTURED GRAY TEXTURED SANDSTONE CUSTOM COLOR	HIGH CRI, 90+ CORROSION RESISTANT FINISH

DIRECT AND INDIRECT (16" FIXTURE)

CYNE							WM2	UNV			
1	2	3	4	5	6	7	8	9	10	11	12

1 FIXTURE	2 WATTAGE UP LIGHT	3 WATTAGE DOWN LIGHT	4 CCT UP LIGHT	5 CCT DOWN LIGHT	6 OPTICS UP LIGHT	7 OPTICS DOWN LIGHT	8 MOUNTING	9 VOLTAGE	10 CONTROLS	11 FINISH	12 OPTIONS
CYNDER CYNE	7 WATTS 10 WATTS 14 WATTS 21 WATTS	7 WATTS 10 WATTS 14 WATTS 21 WATTS	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	15° 20° 30° 55° 100° ASYMMETRIC	15° 20° 30° 55° 100° ASYMMETRIC	WALL MOUNT Direct and Indirect	UNIVERSAL 120V - 277V	NON-DIMMING 0-10V DIMMING	TEXTURED WHITE TEXTURED BLACK TEXTURED BRONZE TEXTURED LIGHT BRONZE TEXTURED GRAY TEXTURED SANDSTONE CUSTOM COLOR	HIGH CRI, 90+ CORROSION RESISTANT FINISH

PROJECT:	TYPE:	CATALOG #:	CYNE - - - - - UNV - - - -
			CYNE - - - - - WM2 - UNV - - - -

PERFORMANCE

FIXTURE	OPTIC	7 WATTS			10 WATTS			14 WATTS			21 WATTS		
		DELIVERED LUMENS	LUMINARE EFFICACY	PEAK CANDELA	DELIVERED LUMENS	LUMINARE EFFICACY	PEAK CANDELA	DELIVERED LUMENS	LUMINARE EFFICACY	PEAK CANDELA	DELIVERED LUMENS	LUMINARE EFFICACY	PEAK CANDELA
DIRECT OR INDIRECT	15°	597 lm	85 lm/W	2486	935 lm	94 lm/W	3894	1326 lm	95 lm/W	4972	1990 lm	95 lm/W	8287
	20°	598 lm	85 lm/W	1533	938 lm	94 lm/W	2403	1330 lm	84 lm/W	6037	1996 lm	95 lm/W	5113
	30°	583 lm	83 lm/W	988	916 lm	92 lm/W	1548	1169 lm	84 lm/W	1976	1949 lm	93 lm/W	3294
	55°	585 lm	84 lm/W	768	916 lm	92 lm/W	1203	1170 lm	84 lm/W	1536	1951 lm	93 lm/W	2560
	100°	581 lm	83 lm/W	253	910 lm	91 lm/W	397	1162 lm	83 lm/W	507	1937 lm	92 lm/W	845
	ASY	486 lm	70 lm/W	523	762 lm	76 lm/W	819	973 lm	70 lm/W	1046	1623 lm	77 lm/W	1744
DIRECT AND INDIRECT	15°	1194 lm	85 lm/W	2486	1870 lm	94 lm/W	3894	2652 lm	95 lm/W	4972	3980 lm	95 lm/W	8287
	20°	1196 lm	85 lm/W	1533	1876 lm	94 lm/W	2403	2660 lm	84 lm/W	6037	3992 lm	95 lm/W	5113
	30°	1166 lm	83 lm/W	988	1832 lm	92 lm/W	1548	2338 lm	84 lm/W	1976	3898 lm	93 lm/W	3294
	55°	1170 lm	84 lm/W	768	1832 lm	92 lm/W	1203	2340 lm	84 lm/W	1536	3902 lm	93 lm/W	2560
	100°	1162 lm	83 lm/W	253	1820 lm	91 lm/W	397	2324 lm	83 lm/W	507	3874 lm	92 lm/W	845
	ASY	972 lm	70 lm/W	523	1524 lm	76 lm/W	819	1946 lm	70 lm/W	1046	3246 lm	77 lm/W	1744


FIXTURES PER CIRCUIT - BASED ON 13AMP CIRCUIT

FIXTURE	7 WATTS		10 WATTS		14 WATTS		21 WATTS	
	120V	277V	120V	277V	120V	277V	120V	277V
DIRECT OR INDIRECT	223	514	156	360	111	257	74	171
DIRECT AND INDIRECT	111	257	78	180	56	129	37	86


PROJECT:	TYPE:	CATALOG #:	CYNE - - - - - UNV - - - - -
			CYNE - - - - - WM2 - UNV - - - - -

DIMENSIONS


CMD - CEILING MOUNT DOWNLIGHT

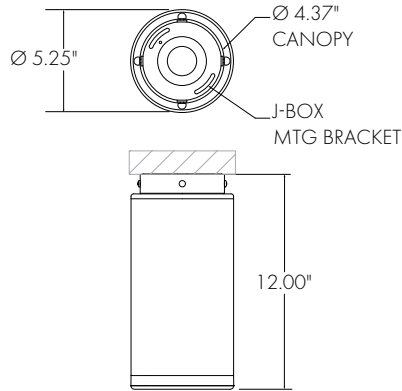

WMU, WMD - WALL DOWNLIGHT OR UPLIGHT

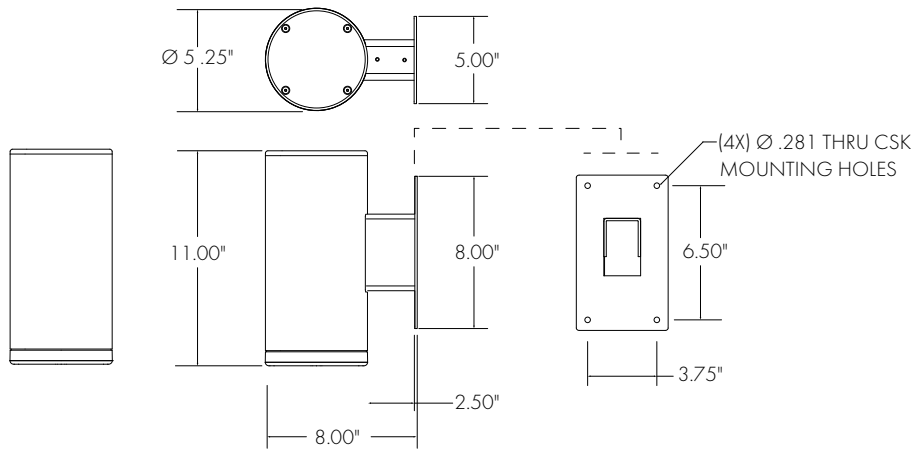

PND - PENDANT DOWNLIGHT (FOR INTERIOR USE ONLY)

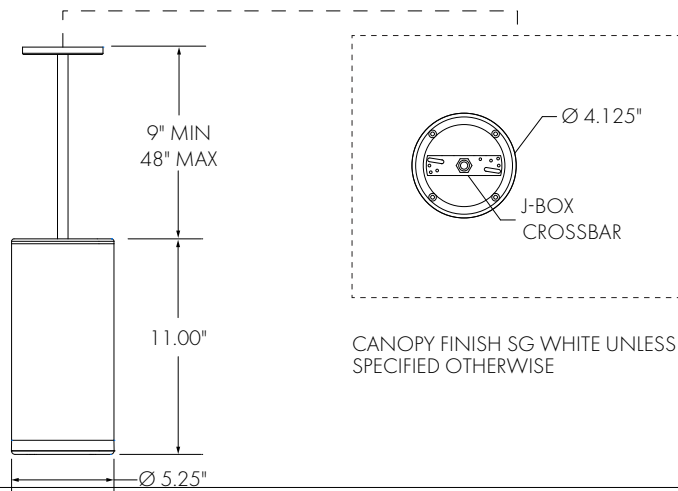

PROJECT:	TYPE:	CATALOG #:	CYNE - - - - - UNV - - - - -
			CYNE - - - - - WM2 - UNV - - - - -

DIMENSIONS

WM2 - WALL DIRECT AND INDIRECT

