


PROJECT:	TYPE:	CAT. #:	-	-	-	-	-	-	-	-
----------	-------	---------	---	---	---	---	---	---	---	---

PROFILE


LIGHT SOURCE	250W (6.0" PIPE), 500W (10.0" PIPE)
OPTICS	90° AND 180°
CCT	3000K, 3500K, 4000K
PERFORMANCE	4000K, 80 CRI (25° C AMBIENT)
VOLTAGE	120, 277, VAC.
POWER	INTEGRATED POWER SUPPLY REMOTE POWER SUPPLY OPTION FOR IL10
DIMMING	0-10V DIMMING
DIMENSIONS	6.0" PIPE OR 10.0" PIPE
WEIGHT	SEE DIMENSIONS PAGE
HOUSING	PRECISION FORMED SHEET METAL
LIGHT TUBE	POLYCARBONATE
FINISH	HIGH DURABILITY POWDER COATING
WARRANTY	2-YEAR LIMITED
OPERATING TEMP	-40° C TO 50° C
LUMEN MAINTENANCE	L70 75,000 HOURS
CERTIFICATION	ETL AND cETL FOR WET LOCATION




STANDARD FINISHES

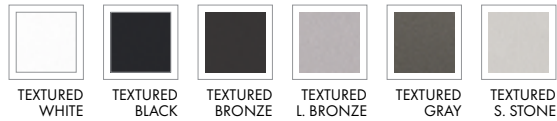

OPTICS

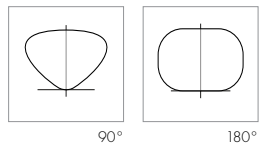

DIMENSIONS

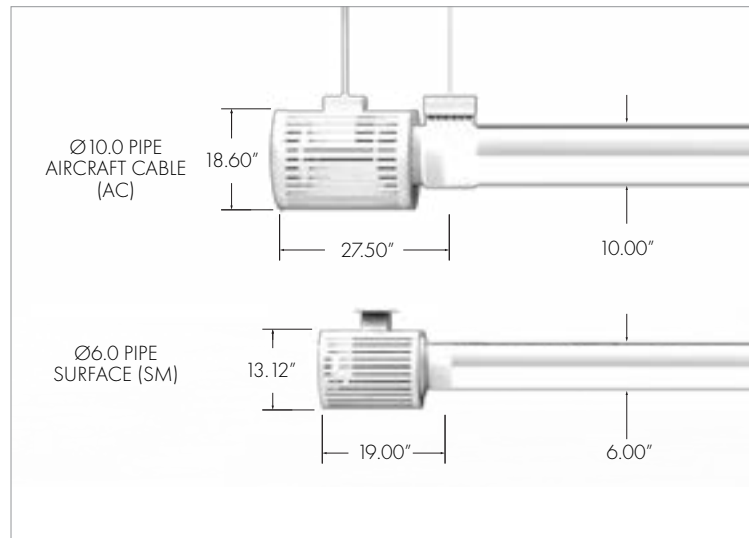

PROJECT:	TYPE:	CAT. #:	-	-	-	-	-	-	-	-	-
----------	-------	---------	---	---	---	---	---	---	---	---	---

SPECIFICATION

--	--	--	--	--	--	--	--	--	--

1	2	3	4	5	6	7	8	9
----------	----------	----------	----------	----------	----------	----------	----------	----------

1 **FIXTURE**

ILLUSIONS Ø6.0" PIPE	IL6
ILLUSIONS Ø10.0" PIPE	IL10

4 **OPTICS**

90° PERFORMANCE FILM	90
180° PERFORMANCE FILM	180

6 **LENGTH**

SINGLE ILLUMINATOR

16'	S16
24'	S24
32'	S32
40'	S40

not available with Ø6.0" pipe (IL6)

7 **CONTROL**

NON-DIMMING	NO
0-10V DIMMING	DIM

Dimming controls to be supplied by others.

2 **WATTAGE**

IL6 - Ø6.0" PIPE

250 WATTS	250
-----------	-----

IL10 - Ø10.0" PIPE

500 WATTS	500
-----------	-----

5 **MOUNTING**

SURFACE	SM
AIRCRAFT CABLE	AC-X

illuminator supported with a pendant stem, all transition mounting points have aircraft cable

TWIN ILLUMINATOR

40'	T40
48'	T48
56'	T56

not available with Ø6.0" pipe (IL6)

64'	T64
72'	T72
80'	T80

not available with Ø6.0" pipe (IL6)

8 **FINISH**

TEXTURED WHITE	TW
TEXTURED GRAY	TGR
TEXTURED BLACK	TBL
TEXTURED BRONZE	TBR
TEXTURED LIGHT BRONZE	TLB
TEXTURED NATURAL	TN
TEXTURED SANDSTONE	TS
CUSTOM COLOR	CC

contact factor for custom color additional charges will apply

3 **CCT**

2700K	27K
3000K	30K
3500K	35K
4000K	40K

please contact factory for additional color temperatures.

7 **VOLTAGE**

120V	120
277V	277
347V	347

see options for Remote Power Supply

9 **OPTIONS**


REMOTE POWER SUPPLY	RPS
---------------------	-----

available with IL10 only


PROJECT:	TYPE:	CAT. #:	-	-	-	-	-	-	-	-	-
----------	-------	---------	---	---	---	---	---	---	---	---	---

DIMENSIONS


Ø6.0" PIPE - SURFACE (SM)

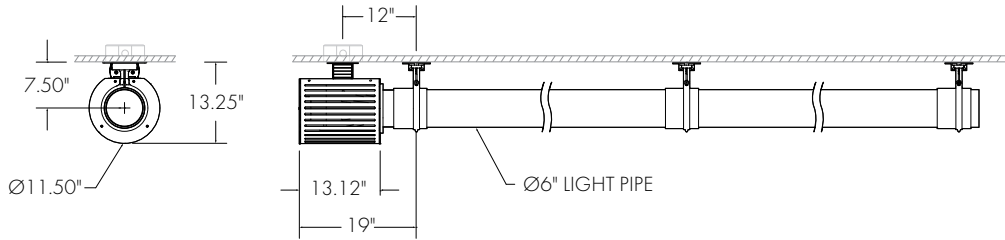


Ø6.0" PIPE - AIRCRAFT CABLE (AC-X)

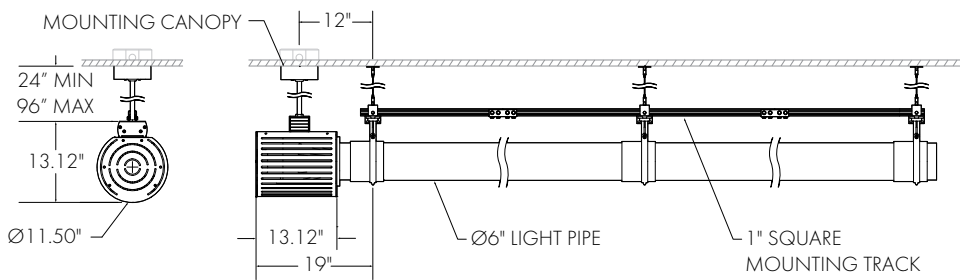

Ø10.0" PIPE - SURFACE (SM)

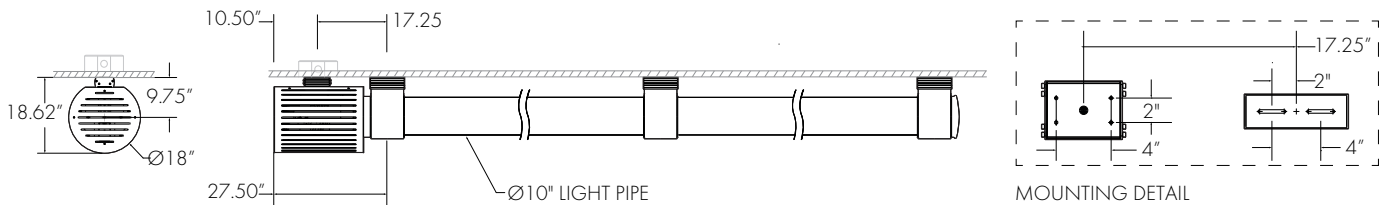

Ø10.0" PIPE - AIRCRAFT CABLE (AC-X)

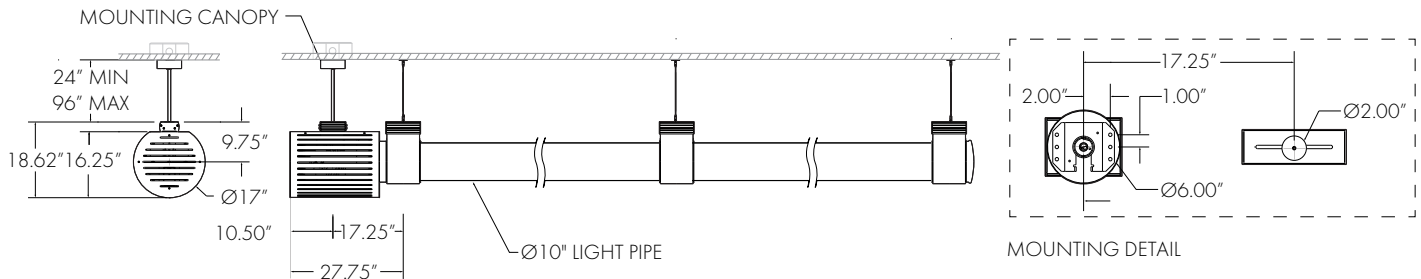

PROJECT:	TYPE:	CAT. #:	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
----------	-------	---------	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

LENGTH CONFIGURATIONS

