



PROJECT:	TYPE:	CAT. #:	SF	-	-	-	-	-	-	-
----------	-------	---------	----	---	---	---	---	---	---	---

PROFILE

LIGHT SOURCE	HIGH PERFORMANCE LED BOARDS
OUTPUT	12W/FT
CCT	RGB
PERFORMANCE	SURFACE LUMINANCE OF 600 CD/M2
VOLTAGE	120V OR 277V
POWER	REMOTE POWER SUPPLY
CONTROL	0-10V DIMMING
SIZES	UP TO 16 SQ.FT.
WEIGHT	APPROXIMATELY 2.0 LBS./SQ. FT.
HOUSING	EXTRUDED ALUMINUM FRAME
MOUNTING	SURFACE
ACRYLIC	TRANSPARENT CAST ACRYLIC, LASER ETCHED
FINISH	HIGH DURABILITY POWDER COATING
WARRANTY	5-YEAR LIMITED
CERTIFICATION	UL AND CUL APPROVED FOR DRY LOCATION

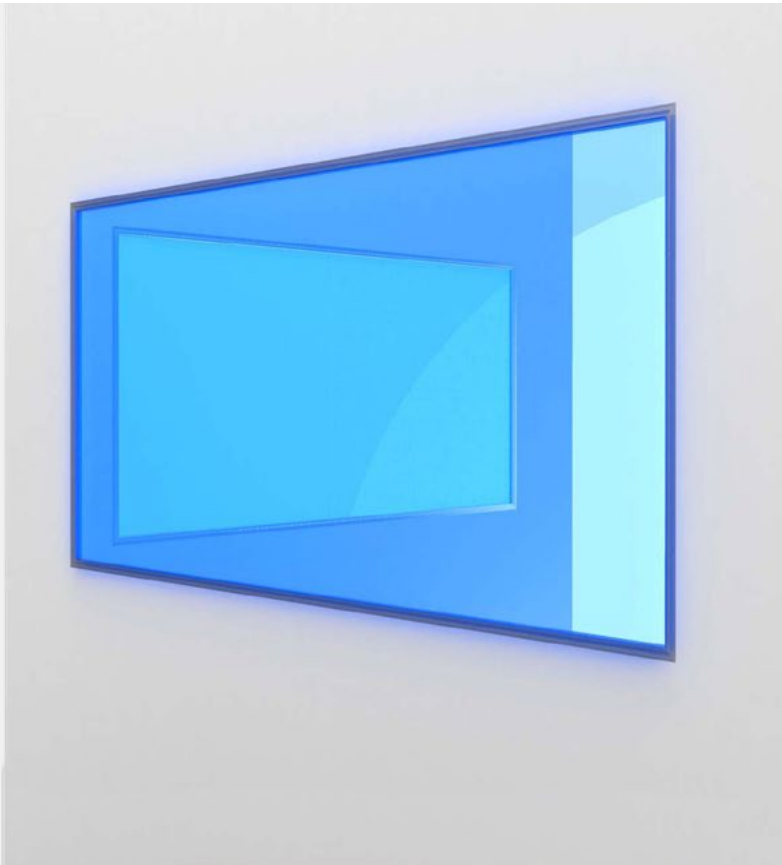

PROFILE

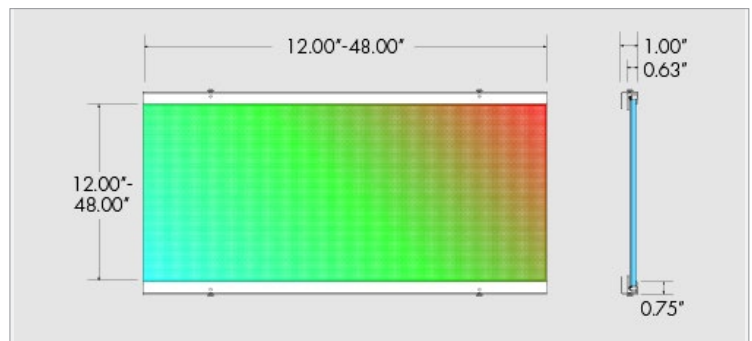

OPTIONS



FRAME

PROJECT:	TYPE:	CAT. #:	SF	-	-	-	-	-	-	-
----------	-------	---------	----	---	---	---	---	---	---	---

SPECIFICATION

SF								seperate options with dashes
1	2	3	4	5	6	7	8	

1 FIXTURE	4 SIZE	5 MOUNTING	10 OPTIONS
SMARTFIT SF	12" X 12" 1212	PORTRAIT P	PLENUM 120V PWR SUPPLY PL120 all plenum cabling provided by others
	12" X 24" 1224	LANDSCAPE L	PLENUM 277V PWR SUPPLY PL277 all plenum cabling provided by others
2 OUTPUT	12" X 36" 1236	6 POWER SUPPLY	
HIGH OUTPUT HO 12V/FT	12" X 48" 1248	REMOTE POWER SUPPLY REM	
	24" X 24" 2424	Power supply must be ordered separately . See ordering information below	
3 CCT	24" X 36" 2436	7 FINISH	
COLOR CHANGING RGB	24" X 48" 2448	SEMI-GLOSS WHITE W	
	36" X 36" 3636		
	36" X 48" 3648		
	48" X 48" 4848		
	contact factory for additional sizes		

POWER SUPPLY & CONTROL ORDER OPTIONS

REMOTE POWER SUPPLY OPTIONS - DRY LOCATION - REQUIRED	
100W POWER SUPPLY (120V)	C1/100/RGB/120V
100W POWER SUPPLY (277V) NON-DIMMING	C1/100/RGB/277V


Due to remote power supply application variances, it is recommended to not exceed 80% of the RPS Power Supply's total wattage capacity. For specific and case by case requirements, please contact factory for assistance.

CONTROL & WIRING ORDER OPTIONS

DMX DISTRIBUTION & PROGRAMMING KIT - REQUIRED	
DMX PROGRAMMING TOOL	LPT
One DMX programming tool is required for field re-addressing of factory DMX settings.	
DMX DISTRIBUTION KIT ONLY (4 OUTPUTS)	CDS-A
CDS-A consists of 4 outputs. Limited to (1) run per output. Each output accomodates up to 32 fixtures. Terminators are included for use as required.	

PROJECT: _____ TYPE: _____ CAT. #: SF - - - - -

FIXTURE DIMENSIONS

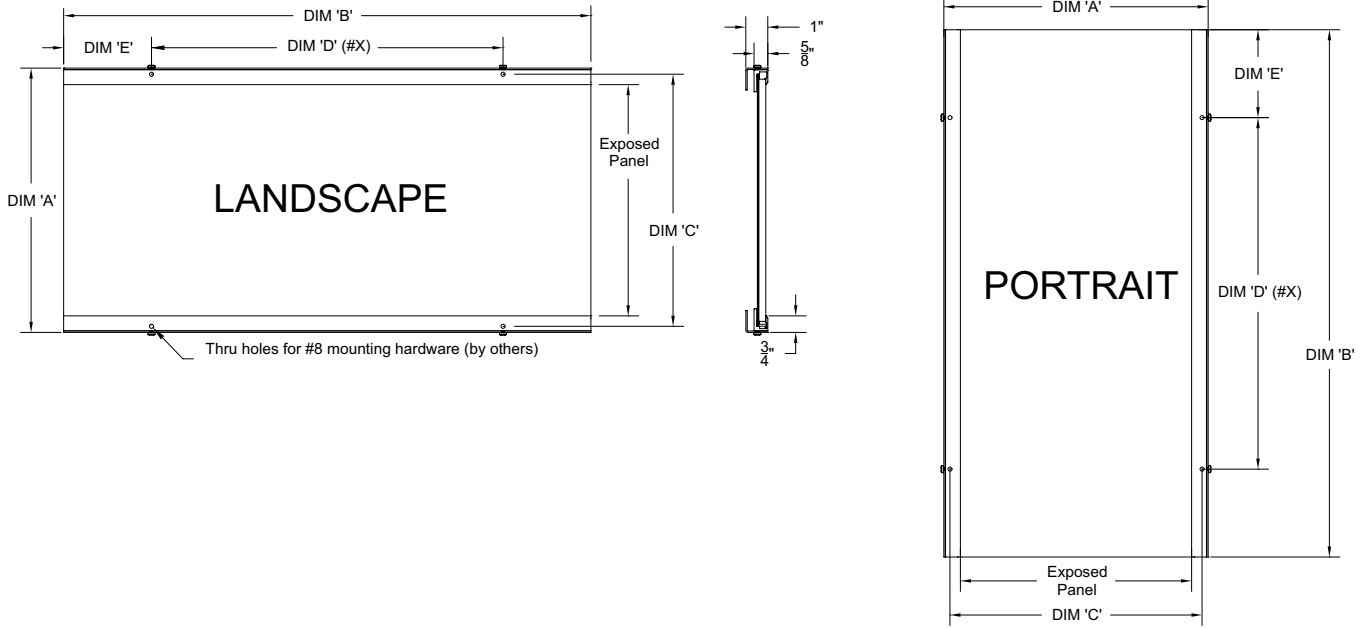

SMARTFIT SIZE	DIM. 'A'	DIM. 'B'	EXPOSED PANEL	DIM. 'C' MOUNTING CENTER	DIM. 'D' O.C. (#X)	DIM. 'E'	#8 MOUNTING HARDWARE NEEDED
SF1212	12" (305 mm)	12" (305 mm)	10-1/2" (266.7 mm)	11-1/2" (292.1 mm)	8" (203.2 mm) O.C. (1X)	2" (50.8 mm)	4X
SF1224	12" (305 mm)	24" (609 mm)	10-1/2" (266.7 mm)	11-1/2" (292.1 mm)	16" (406.4 mm) O.C. (1X)	4" (101.6 mm)	4X
SF1236	12" (305 mm)	36" (915 mm)	10-1/2" (266.7 mm)	11-1/2" (292.1 mm)	16" (406.4 mm) O.C. (2X)	2" (50.8 mm)	6X
SF1248	12" (305 mm)	48" (1219 mm)	10-1/2" (266.7 mm)	11-1/2" (292.1 mm)	16" (406.4 mm) O.C. (2X)	8" (203.2 mm)	6X
SF2424	24" (609 mm)	24" (609 mm)	22-1/2" (571.5 mm)	23-1/2" (596.4 mm)	16" (406.4 mm) O.C. (1X)	4" (101.6 mm)	4X
SF2436	24" (609 mm)	36" (915 mm)	22-1/2" (571.5 mm)	23-1/2" (596.4 mm)	16" (406.4 mm) O.C. (2X)	2" (50.8 mm)	6X
SF2448	24" (609 mm)	48" (1219 mm)	22-1/2" (571.5 mm)	23-1/2" (596.4 mm)	16" (406.4 mm) O.C. (2X)	8" (203.2 mm)	6X
SF3636	36" (915 mm)	36" (915 mm)	34-1/2" (876.3 mm)	35-1/2" (901.7 mm)	16" (406.4 mm) O.C. (2X)	2" (50.8 mm)	6X
SF3648	36" (915 mm)	48" (1219 mm)	34-1/2" (876.3 mm)	35-1/2" (901.7 mm)	16" (406.4 mm) O.C. (2X)	8" (203.2 mm)	6X
SF4848	48" (1219 mm)	48" (1219 mm)	46-1/2" (1181.1 mm)	47-1/2" (1206.5 mm)	16" (406.4 mm) O.C. (2X)	8" (203.2 mm)	6X