


PROJECT:	TYPE:	CAT. #:	SF	-	-	-	-	-	-	-
----------	-------	---------	----	---	---	---	---	---	---	---

PROFILE

LIGHT SOURCE	HIGH PERFORMANCE LED BOARDS
OUTPUT	9W/FT, 18W/FT
CCT	3000K, 3500K, 4000K, 5000K
COLOR TOLERANCE	±200
CRI	82 CRI
PERFORMANCE	SURFACE LUMINANCE OF 600 CD/M2
VOLTAGE	120V OR 277V
POWER	REMOTE POWER SUPPLY
CONTROL	0-10V DIMMING
SIZES	UP TO 16 SQ.FT.
WEIGHT	APPROXIMATELY 2.0 LBS./SQ. FT.
HOUSING	EXTRUDED ALUMINUM FRAME
MOUNTING	SURFACE
ACRYLIC	TRANSPARENT CAST ACRYLIC, LASER ETCHED
FINISH	HIGH DURABILITY POWDER COATING
WARRANTY	5-YEAR LIMITED
CERTIFICATION	UL AND CUL APPROVED FOR DRY LOCATION



PROFILE

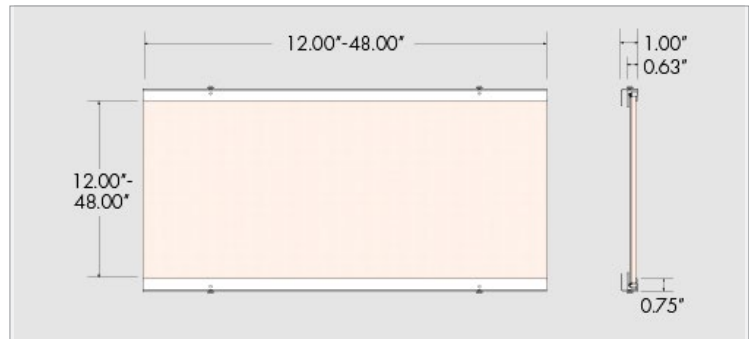

OPTIONS



FRAME

PROJECT: _____ TYPE: _____ CAT. #: SF - - - - -

SPECIFICATION

SF							
----	--	--	--	--	--	--	--

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

1 FIXTURE SMARTFIT SF	4 SIZE LOW OUTPUT SIZES 12" X 12" 1212 12" X 24" 1224 12" X 36" 1236 12" X 48" 1248 HIGH OUTPUT SIZES 12" X 12" 1212 12" X 24" 1224 12" X 36" 1236 12" X 48" 1248 24" X 24" 2424 24" X 36" 2436 24" X 48" 2448 36" X 36" 3636 36" X 48" 3648 48" X 48" 4848 contact factory for additional sizes	5 MOUNTING PORTRAIT P LANDSCAPE L	8 OPTIONS PLENUM 120V PWR SUPPLY PL120 all plenum cabling provided by others PLENUM 277V PWR SUPPLY PL277 all plenum cabling provided by others
2 OUTPUT LOW OUTPUT LO 9W/FT HIGH OUTPUT HO 18W/FT		6 POWER SUPPLY REMOTE POWER SUPPLY REM Power supply must be ordered separately . See ordering information below	
3 CCT 3000K 30K 3500K 35K 4000K 40K 5000K 50K		7 FINISH SEMI-GLOSS WHITE W	

POWER SUPPLY & CONTROL ORDER OPTIONS


REMOTE POWER SUPPLY OPTIONS - DRY LOCATION - REQUIRED

NON-DIMMING		0-10V DIMMING	
100W POWER SUPPLY (120V) NON-DIMMING	C 1 / 100 / PWR / 120V	100W 0-10V DIMMING POWER SUPPLY (120V)	C 1 / 100 / DIM / 120V
100W POWER SUPPLY (277V) NON-DIMMING	C 1 / 100 / PWR / 277V	100W 0-10V DIMMING POWER SUPPLY (277V)	C 1 / 100 / DIM / 120V

Due to remote power supply application variances, it is recommended to not exceed 80% of the RPS Power Supply's total wattage capacity. For specific and case by case requirements, please contact factory for assistance.

PROJECT: _____ TYPE: _____ CAT. #: SF - - - - -


FIXTURE DIMENSIONS

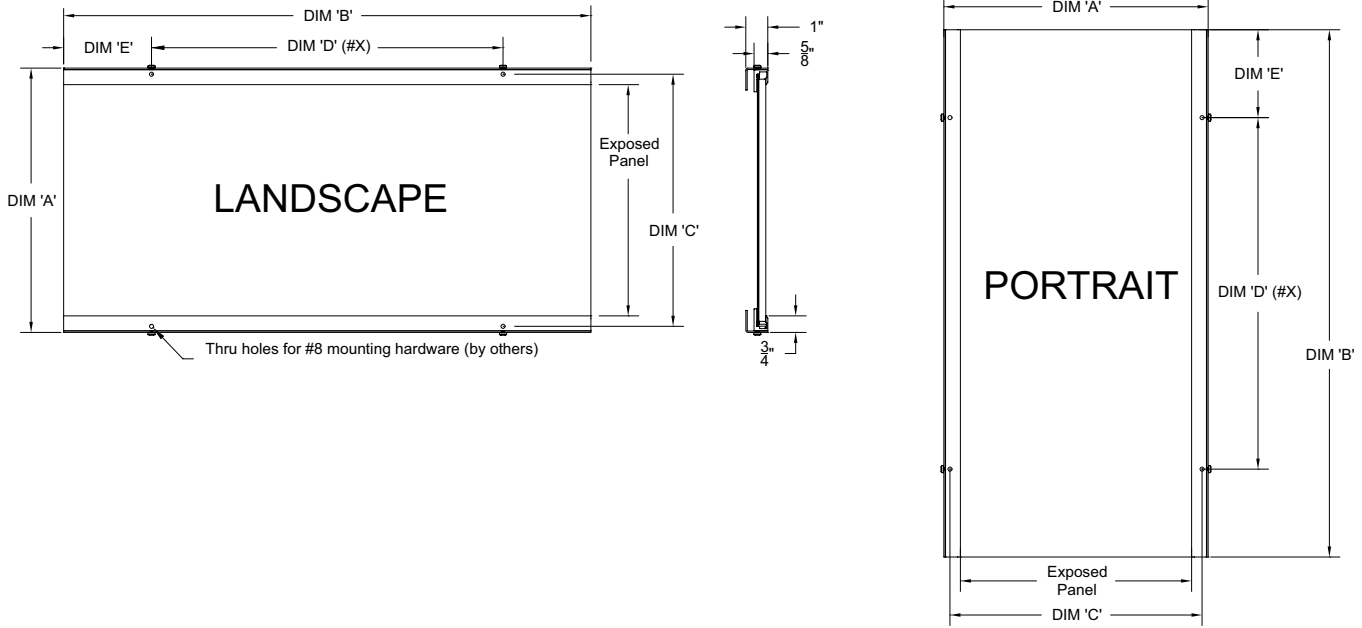

SMARTFIT SIZE	DIM. 'A'	DIM. 'B'	EXPOSED PANEL	DIM. 'C' MOUNTING CENTER	DIM. 'D' O.C. (#X)	DIM. 'E'	#8 MOUNTING HARDWARE NEEDED
SF1212	12" (305 mm)	12" (305 mm)	10-1/2" (266.7 mm)	11-1/2" (292.1 mm)	8" (203.2 mm) O.C. (1X)	2" (50.8 mm)	4X
SF1224	12" (305 mm)	24" (609 mm)	10-1/2" (266.7 mm)	11-1/2" (292.1 mm)	16" (406.4 mm) O.C. (1X)	4" (101.6 mm)	4X
SF1236	12" (305 mm)	36" (915 mm)	10-1/2" (266.7 mm)	11-1/2" (292.1 mm)	16" (406.4 mm) O.C. (2X)	2" (50.8 mm)	6X
SF1248	12" (305 mm)	48" (1219 mm)	10-1/2" (266.7 mm)	11-1/2" (292.1 mm)	16" (406.4 mm) O.C. (2X)	8" (203.2 mm)	6X
SF2424	24" (609 mm)	24" (609 mm)	22-1/2" (571.5 mm)	23-1/2" (596.4 mm)	16" (406.4 mm) O.C. (1X)	4" (101.6 mm)	4X
SF2436	24" (609 mm)	36" (915 mm)	22-1/2" (571.5 mm)	23-1/2" (596.4 mm)	16" (406.4 mm) O.C. (2X)	2" (50.8 mm)	6X
SF2448	24" (609 mm)	48" (1219 mm)	22-1/2" (571.5 mm)	23-1/2" (596.4 mm)	16" (406.4 mm) O.C. (2X)	8" (203.2 mm)	6X
SF3636	36" (915 mm)	36" (915 mm)	34-1/2" (876.3 mm)	35-1/2" (901.7 mm)	16" (406.4 mm) O.C. (2X)	2" (50.8 mm)	6X
SF3648	36" (915 mm)	48" (1219 mm)	34-1/2" (876.3 mm)	35-1/2" (901.7 mm)	16" (406.4 mm) O.C. (2X)	8" (203.2 mm)	6X
SF4848	48" (1219 mm)	48" (1219 mm)	46-1/2" (1181.1 mm)	47-1/2" (1206.5 mm)	16" (406.4 mm) O.C. (2X)	8" (203.2 mm)	6X

PROJECT:	TYPE:	CAT. #:	SF	-	-	-	-	-	-	-	-
----------	-------	---------	----	---	---	---	---	---	---	---	---

CONTRA C1.0 | REMOTE POWER SUPPLY

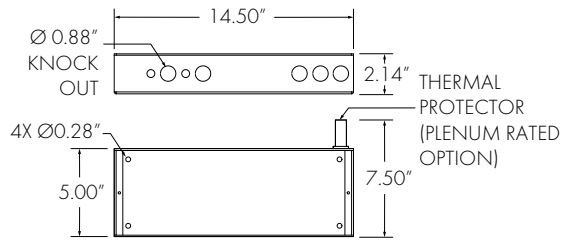

Provided with dual circuit option. 2x 90.0 W with dimming, 2x 96.0 W with no dimming.