

TULA (Model)



TECHNICAL INFORMATION

[IES Files](#)

Watt	5W – 10W
Luminaire	Up to 860lm
CCT	3000K – 4000K
CRI	>70 – >80
Wiring	120V 60Hz
LED life time	> 60000h - L80 - B20 (Ta 25°C)
Color	Aluminium - 21 / Grey - 16

DESCRIPTION

Construction

- Die-cast aluminium body (EN 47100).
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.

Electrical & Optics

- Wiring on removable galvanized steel tray.
- High-efficacy LEDs with standard 3000K, 4000K (2700K or other CCTs available on request).
- PMMA lenses for LEDs.
- Opal PMMA screen or 3/16" thermal-shock resistant tempered safety glass.

Listings

- UL certified to U.S. and Canadian standards, suitable for wet locations (cULus mark).
- Rated IP66 per EN60598.
- Luminaire rated for -25°C minimum ambient.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.

Installation

- Wall mounted.
- Waterproof grommet for single cable entry.
- Die-cast aluminium base (EN 47100) for anchoring with rawlplugs.
- Available accessory for mounting on standard junction boxes.

IP66



VERSIONS *(Click on below link to configure your product)*



[oneway](#)



[oneway - opal](#)



[twoway](#)



[twoway - opal](#)



[twoway - opal + blade](#)

Size:
Ø 1" 31/32
4" 3/4
4" 19/32


Size:
Ø 1" 31/32
4" 3/4
5" 7/16

Size:
Ø 1" 31/32
4" 3/4
5" 5/32

Size:
Ø 1" 31/32
4" 3/4
6" 7/8

Size:
Ø 1" 31/32
4" 3/4
6" 3/32

OPTICS

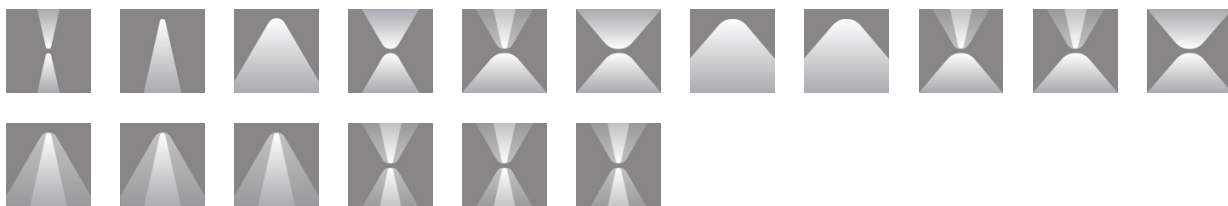

See accessories in the next page

WALL PLATE TULA ANTHRACITE

Arcluce Code **X-TU-WPCUS-16**
Code Ref. **1099379X-16US**

**TECHNICAL INFORMATION**

Color Grey - 16

Weight 0.88 lb

WALL PLATE TULA ALUMINIUM

Arcluce Code **X-TU-WPCUS-21**
Code Ref. **1099379X-21US**

**TECHNICAL INFORMATION**

Color Aluminium - 21

Weight 0.88 lb
