

Application

Recessed wall luminaire with directed light distribution for the illumination of ground surfaces, stairs and pathways.

Materials

Luminaire housing and faceplate constructed of die-cast marine grade, copper free (≤0.3% copper content) A360.0 aluminum alloy
 Safety glass with optical texture
 Silicone applied robotically to casting, plasma treated for increased adhesion
 High temperature silicone gasket
 Mechanically captive stainless steel fasteners
 Stainless steel screw clamps
 Composite installation housing

NRTL listed to North American Standards, suitable for wet locations
 Protection class IP 65
 Weight: 3.3lbs

Electrical

Operating voltage 120-277V AC
 Minimum start temperature -30° C
 LED module wattage 4.8 W
 System wattage 7.0 W
 Controllability 0-10V dimmable
 Color rendering index Ra > 80
 Luminaire lumens 739 lumens (4000K)
 LED service life (L70) 50,000 hours

LED color temperature


- 4000K - Product number + **K4**
- 3500K - Product number + **K35**
- 3000K - Product number + **K3**
- 2700K - Product number + **K27**

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details


Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

Available colors Black (BLK) White (WHT) RAL:
 Bronze (BRZ) Silver (SLV) CUS :



Type:
 BEGA Product:
 Project:
 Modified:

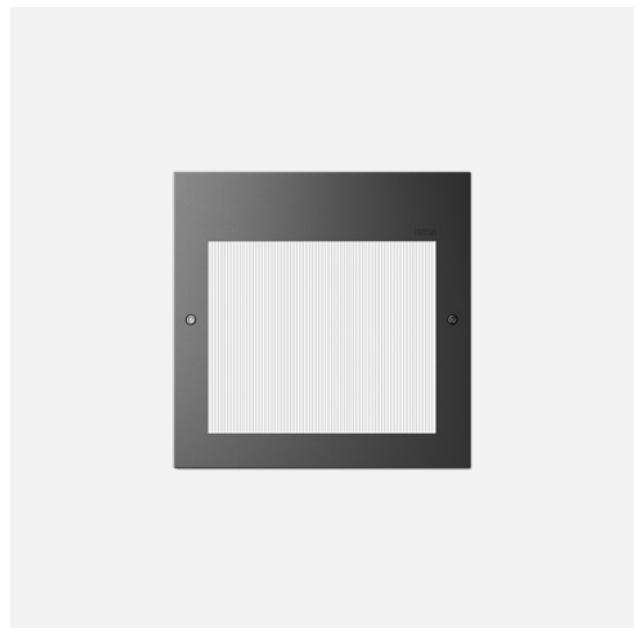

Recessed wall luminaire · directed light				
	LED	A	B	C
24 207	ADA 4.8 W	7 1/2	7 1/2	5 1/4