



# L08

EXTERIOR | INTERIOR

In-grade | For ground, ceilings, walls, and stairs

Wet, Damp, and Dry location



## Ordering Information

Clear Form

Date :

Project :

Type :

Quantity :

Note :

## Specifications

Luminaire | Example Code: L08-2-W30H-D-MK3-S-S6

Product	Version	CCT & CRI <sup>1</sup>	Aperture	Mounting Kit <sup>2</sup> (optional)	Flange & Back Box <sup>3</sup>	Trim Finish <sup>6</sup>
L08	1 1W 2 2W	<b>Standard (80+) CRI:</b> W22S 2200K 80+  <b>High (90+) CRI:</b> W27H 2700K 90+ W30H 3000K 90+ W35H 3500K 90+ W41H 4100K 90+	S single D double	MK1 vertical surface MK3 in-ground	<b>Octagonal Aluminum Back Box with:</b> S standard flange depth: 3-1/5" (89mm) P paving stone flange depth: 5-1/2" (138mm) <sup>4</sup>  <b>Pipe <sup>5</sup>:</b> PIPE 1-5/8" PVC pipe length: 11-13/16" (300mm)  NB no back box or flange	<b>Aluminum Finishes:</b> MA matte clear anodized BA black anodized BZ bronze powder coated  <b>Stainless Steel Finish:</b> S6 stainless steel 316

## System Components (Ordered Separately)

Remote Driver :

\* Consult MP Lighting Website or Factory.

## Important Notes

### Specification

1. Refer to pg.2 - for Light Quality and Colour Consistency.

2. Mounting kit is ordered separately. Please consult factory.

3. For components included, refer to Luminaire Construction section. See pg.3 for back box and flange options.

4. Paving stone flange is also recommended for a better cement/concrete flow.

5. Factory set length of 11-13/16" (300mm). Visit [PIPE-C](#) for details.
6. Different finish options are only applicable to trim ring and not for LED module housing. Refer to Appendix or MP Lighting website for complete look of luminaire with different trim finish options.

### Warranty Notes & Disclaimer

Malfunction and damage to product due to incompatible dimming system or misuse will not be covered under warranty. Consult MP Lighting for recommended drivers. If the fixture has an option to be installed with a dimming control system, consult a dimming system manufacturer with minimum load before installing. MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products. Consult MP Lighting website for most updated documentation.

# L08

EXTERIOR | INTERIOR

In-grade | For ground, ceilings, walls, and stairs

Wet, Damp, and Dry location



## Performance

Wattage	Forward Current	Power Consumption Budget per fixture (including driver)	LED output (Source)	Fixture Output (Delivered)
1W	350mA	1.3W	110 lm	1.0-1.7 lm
2W	700mA	2.6W	220 lm	2.0-3.4 lm

## Application

Environment	Dry / Damp / Wet Location approved. IP 68.
Drive Over Rating	9,700 lbs (4,400 kg)
Mounting	<p><b>Recessed:</b> Designed to be cast into earth, gravel, or concrete or inserted into paving stones or pavers. Included backbox, flange and level for direct burial or casting applications.</p> <p><b>MK1 mounting kit (optional):</b> Recommended for easy installation on vertical surfaces (e.g. stair risers, walls), and downward-facing surfaces (e.g. ceilings, soffits). See "Mounting Options &amp; Dimensions," or visit <a href="#">MK1</a></p> <p><b>MK3 mounting kit (optional):</b> Recommended for thicker concrete slab and paving stone in-ground installation. Custom rectangular electrical box option is available for stair riser&amp;wall installation. See "Mounting Options &amp; Dimensions," or visit <a href="#">MK3</a></p>

## Electrical

Electrical	Remote LED drivers (120-277V AC input, <b>constant current output</b> ): Fixtures to be wired in series.
Control	<p><b>On/off control   Dimming:</b> ELV or 0-10V dimming with appropriate drivers</p> <p><b>Other options (consult factory):</b> TRIAC/MLV, DMX, DALI, Casambi, Power over Ethernet</p>

## Luminaire Construction

LED Light Source	<p><b>W22S</b> = CCT: 2200K, CRI (Ra): 80+, Colour Consistency: 3SDCM</p> <p><b>W27H</b> = CCT: 2700K, CRI (Ra): 90+, Colour Consistency: 2SDCM</p> <p><b>W30H</b> = CCT: 3000K, CRI (Ra): 90+, Colour Consistency: 2SDCM</p> <p><b>W35H</b> = CCT: 3500K, CRI (Ra): 90+, Colour Consistency: 2SDCM</p> <p><b>W41H</b> = CCT: 4100K, CRI (Ra): 90+, Colour Consistency: 3SDCM</p>
Weight	1.8 lbs (0.816 kg). Typical Aluminum Insert & Back Box only.
Material	<b>Fixture:</b> machined marine-grade aluminum, machined brass or machined stainless steel (316) with tempered glass
Supplied with	<p><b>Standard installation housing:</b> Comes with an octagonal back box, a flange, an integral leveling device, a plastic cap, gel filled wire nuts, and silicone grease.</p> <p><b>Cable:</b> 6" (152mm) factory-installed wire lead</p>
Warranty & LED Life	<p>5 years limited warranty</p> <p>Estimated useful life of LED is 50,000 hours.</p>


## Ordered Separately

System Components	<p><b>Power supplies:</b> remote driver</p> <p><b>Mounting kits:</b> MK1 or MK3 (custom length rebar in MK3 supplied by contractors)</p> <p><b>Custom back boxes:</b> see Pg.3-4 Mounting Options &amp; Dimensions.</p>
-------------------	---


## Mounting Options & Dimensions

### LED Insert Dimensions

Fixture



Top View

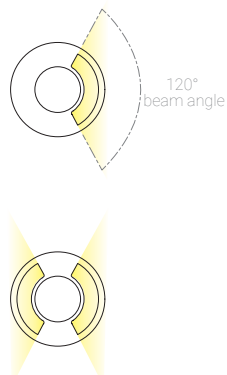

3D View




Beam




### In-ground Installation | Shown with MP Lighting Back Box & Standard Flange (Order Code: **EBX-OCT1-CSMA**)


Box with Standard Flange

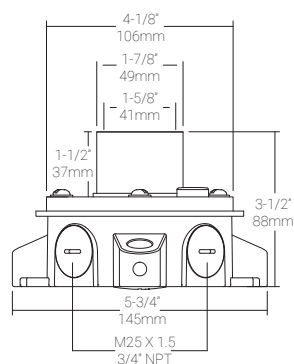

Box with Standard Flange:  
During Concrete Installation

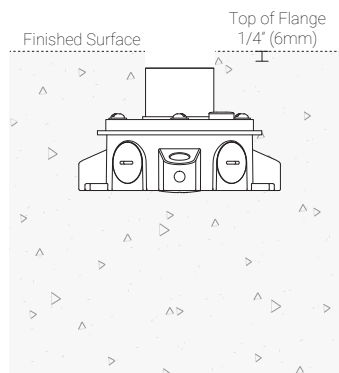


Box with Standard Flange:  
Complete Concrete Installation

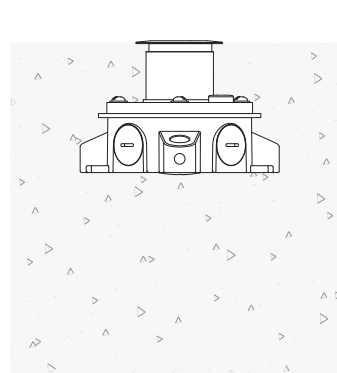


### In-ground Installation | Shown with MP Lighting Back Box & Paving Stone Flange (Order Code: **EBX-OCT1-CPMA**)


Box with Paving Stone Flange:

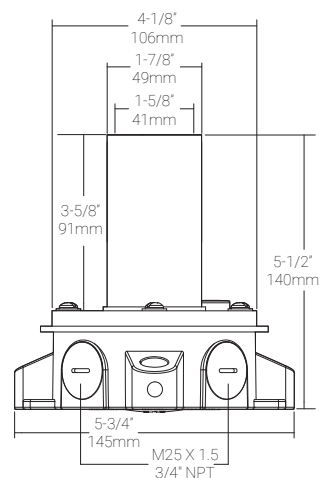

Box with Paving Stone Flange:  
During Paving Stone Installation

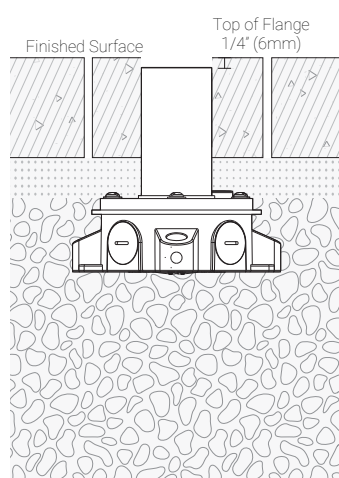


Box with Paving Stone Flange:  
Complete Paving Stone Installation

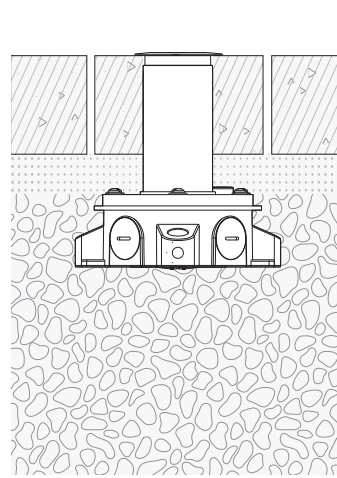


## Mounting Kits

### MK1(MK1-OCT1-C) : Ceiling, Wall, and Stair Riser Installation | Shown with MP Lighting Back Box (Order Code: **EBX-OCT1-CSMA**)


Box with Standard Flange

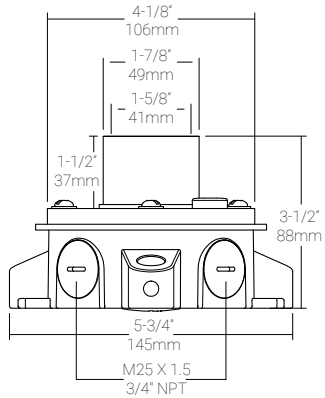

Box with Standard Flange & MK1:  
During Installation

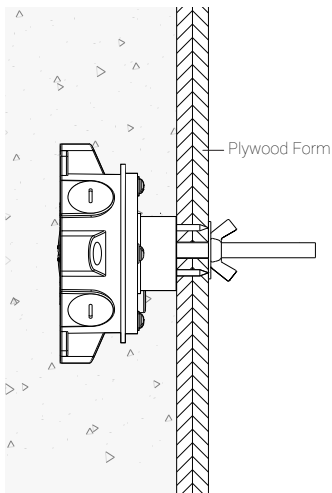


Box with Standard Flange:  
Complete Installation

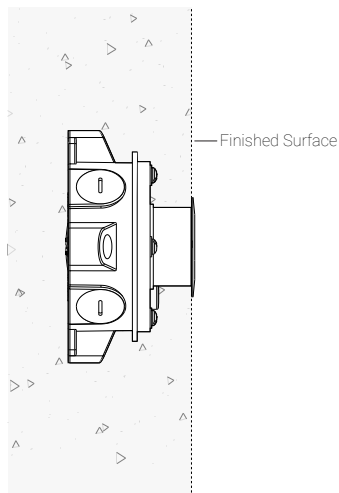


6" (152mm) threaded rod is supplied. Thread size: 3/8"-16

### MK3: In-ground Installation | Shown with MP Lighting Back Box (Order Code: **EBX-OCT1-CSMA** or **EBX-OCT1-CPMA**)

Back box with Standard Flange  
(EBX-OCT1-CSMA)

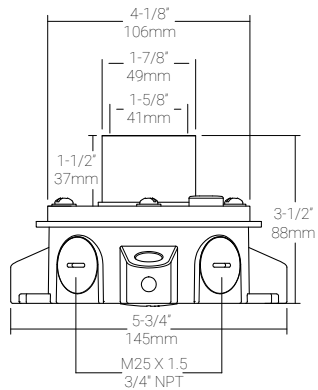


MK3 with Standard Flange:  
Complete Installation

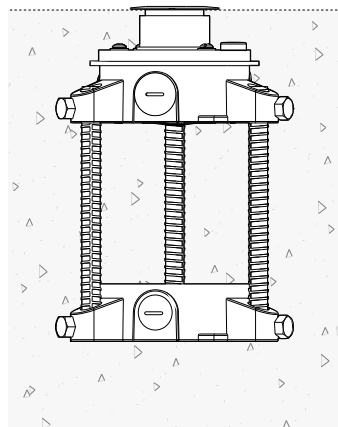


Rebar supplied by others.  
Recommended size: Ø1/2"

Back box with Paving Stone Flange  
(EBX-OCT1-CPMA)


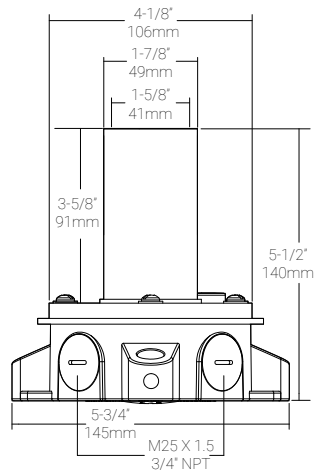


MK3 with Paving Stone Flange:  
Complete Installation

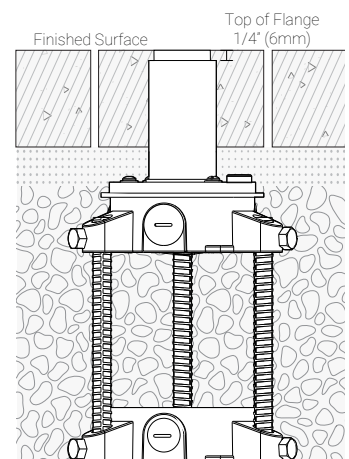

## EBX-OCT1-CPIPE




PIPE (PIPE-C) : In-ground/Landscape Installation | Shown with MP Lighting Back Box (Order Code: **EBX-OCT1-CPIPE**)

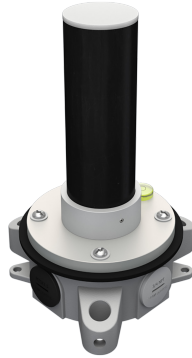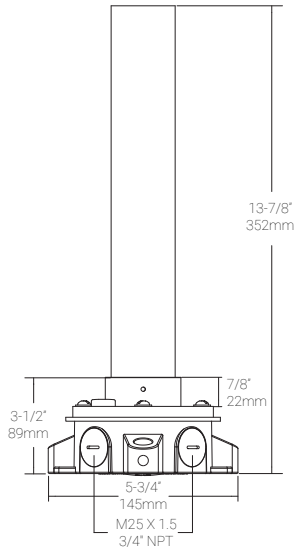




## Rectangular Back Box for Wall Installation (shown with Standard Flange)

1. For wall installation, custom rectangular electrical boxes are available as alternative options.

MP Lighting Single Gang Back Box | Order Code: **EBX-SGB1-CSMA**

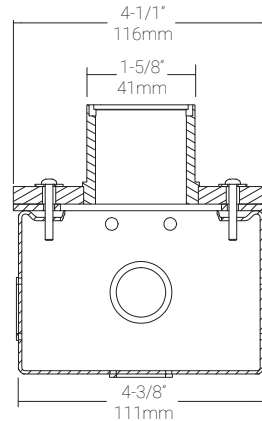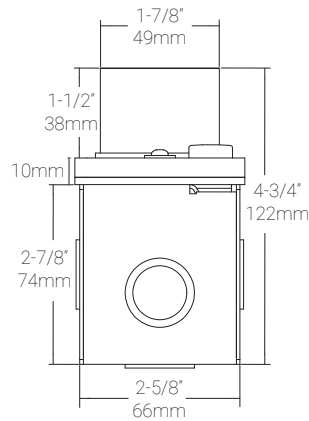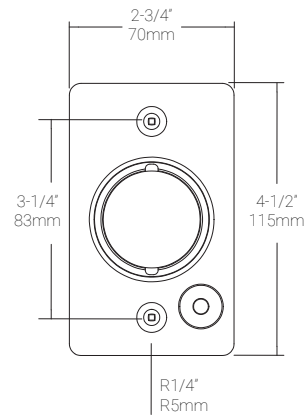


Scepter FD Back box | Order Code: **EBX-SFD-CSMA**

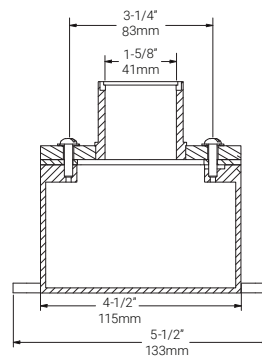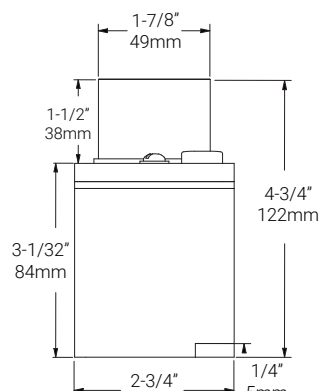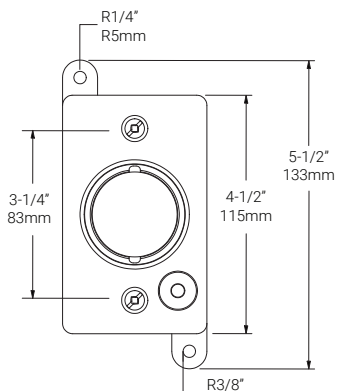

1W, 3000K, 90+ CRI

Isofootcandle Plot




Illuminance at a Distance

Location	Center Beam fc
A	0.1fc
B	0.22fc
C	0.07fc

Delivered Lumen: 1lm

Isofootcandle Plot




Illuminance at a Distance

Location	Center Beam fc
A	0.13fc
B	0.18fc
C	0.1fc

Delivered Lumen: 1.7lm

2W, 3000K, 90+ CRI

Isofootcandle Plot




Illuminance at a Distance

Location	Center Beam fc
A	0.13fc
B	0.4fc
C	0.1fc

Delivered Lumen: 2lm

Isofootcandle Plot




Illuminance at a Distance

Location	Center Beam fc
A	0.21fc
B	0.3fc
C	0.15fc


Delivered Lumen: 3.4 lm

TM30 Report


2700K, 90+CRI

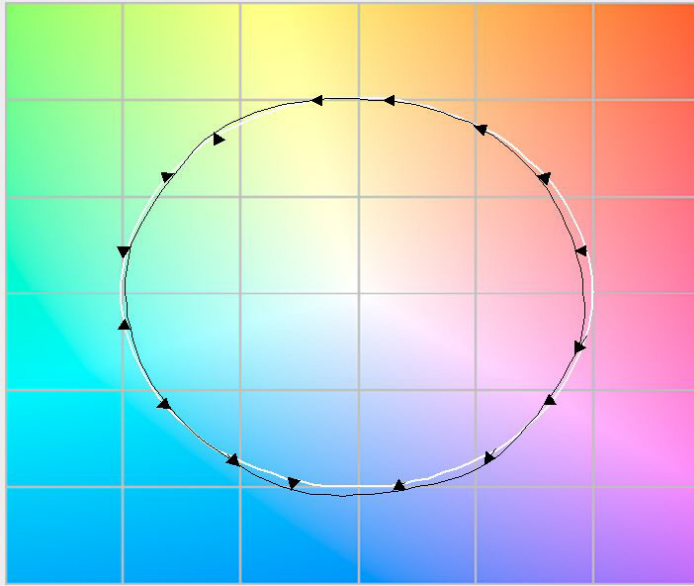

3000K, 90+CRI

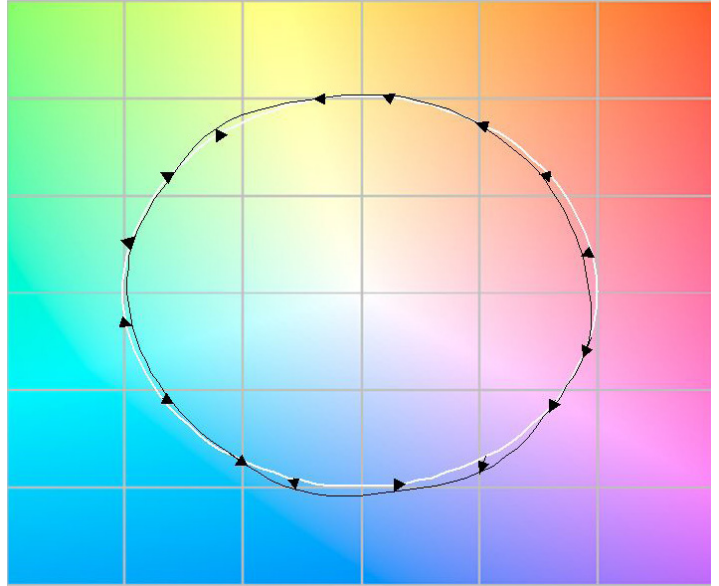


3500K, 90+CRI

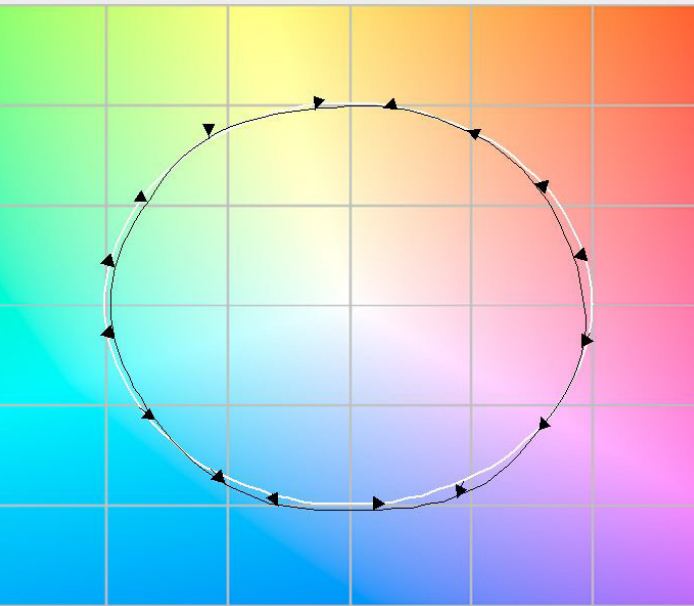

## Appendix


### Aluminum Finishes



**MA** matte clear anodized




**BA** black anodized



**BZ** bronze powder coated

### Stainless Steel Finish



**S6** stainless steel 316

### Lens Options



**C** clear lens