

Job Name:		
Type:		
Part #:		
Notes:		

EHLEX Series

Hazardous Location LED Edge Lit Exit Light

FEATURES

EHLEX series fixture uses a maintenance free LED light source with a 25 year life expectancy. Emergency fixtures meet or exceed NFPA70, NFPA101, EPA Energy Star and OSHA requirements. These fixtures are also suitable for installation in wet or damp locations where salt water spray is possible.

- Copper-free cast aluminum housing with baked-on epoxy powder finish 1/2" NPT conduit hubs
- Exit Signs with Red or Green Legends, Euro exit and other custom legends available. White or other color LED circuit boards and panels available
- 3 hours emergency operation standard with NiCad battery backup
- Maintenance free LED light source with 25+ years life expectancy
- Fully integrated electronic circuit board and components
- Acrylic edge lit single face or double face panel
- Exit Signs with Red or Green Legends, Euro exit and other custom legends available. White or other color LED circuit boards and panels available.
- Available inwall/pendant or end mount configurations
- Operating Temperature Range
- Temperature Rating- T6

Red Legend

+10° C Minimum to +55° C Maximum

Green Legend


+10° C Minimum to +40° C Maximum

• Maximum Input Power Operating Temperature Range

Red no battery- 1.5 Watts Red with battery- 2.5 Watts Green no battery- 2.3 Watts Green with battery- 3 Watts

WARRANTY & LISTINGS

- Class I, Division 2, Groups A, B, C & D
- Class II, Division 2, Groups F & G
- Class III
- UL 1598A Marine Outside Type
- Temperature Class (T-Rating)-T6
- Patent No. 7,287,347
- IP65
- ETL Listed

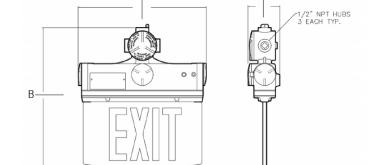

	8]a Ybg]cbgˈf]bW YgŁ		6 cl YX	G\]dd]b['Jc`iaYÁ	
9<@9L'G9F=9G'	5.	6.	7.	K Y][\ h	f6 cl YX :]l hi fYgŁ
ÒP ŠÒÝ ÁŠÒÖ ÁÒ¢ã ÁÚ à \ Á	FIÈÌÁ	FÎÈ€	ÀL.ÎH	FI Áà• ÞÁ	FŘGLÁR ŘÁCĚ

ORDERING INFORMATION: EHLEX Faces: Legend Color: Voltage/Frequency: Mounting: Options:

MODEL	FACES	LEGEND COLOR	VOLTAGE/FREQUENCY	MOUNTING	OPTIONS ¹
EHLEX	1 = Single Face 2 = Double Face	R = Red G = Green	DT = 120/277V 60 HZ 24 = 220-240V 50/60 HZ Other voltages available- consult factory.	WP = Wall/Pendant Mounting EB = End Bracket	EM = Emergency Battery Backup EU = Green Running Man Exit Legend SD = Self Diagnostics X = Exit Legend in Other Languages Language Must be Specified 1 Consult for pricing

08 2019

Of ce: 215-512-7000 Fax: 267-288-5604 www.EnvoyLighting.com

Speci cations subject to change without prior notice. 2019, Envoy Lighting, Inc. ALL RIGHTS RESERVED

DIMENSIONS