Recessed Linear LED





Features

Designed to provide high-performance, visually comfortable, high efficient comfortable perimeter ambient lighting with a 2.5" aperture for commercial and office environments. Featuring a 2.5" regress and a choice of ceiling interface options, Gruv 2.5 Cove is an effective and aesthetically pleasing way of lighting space perimeters.

Product Overview

Type: Recessed Lens Direct

Wattage: 5W/ft, 10W/ft (other wattages available see p2)

3,662 max; 92.1 Lm/W (10W, 4ft fixture) Lumen Output:

2700K, 3000K, 3500K, 4000K Color Temp:

CRI: 83 typ. or 90+ typ

0-10V, 1% dimming (standard) Dimming:

Lutron Hi-lume® EcoSystem, 1% dim, fade to off

DALI dimming, 1% dim

PROJECT:

TYPE:

Fixture Summary (see following pages for more information)

Ceiling Types

9/16"	15/16"	Gyp Board	Millwork		
Yes	CF*	Yes	Yes		

^{*}Consult factory

Performance Chart

Wattage Per Foot	Delivered Lumens	LPW	Color Temp	
5	1,972	99.5	3500K	
10	3,662	92.1	3500K	

Data is based on 3500K-83 IES files available on website Data is based on 4' fixture with performance lens

Electrical Data

		4'		8'	1
Wattage Per Foot		System Watts	Amps	System Watts	Amps
5	120V	22.3	0.18	41.9	0.35
0	277V	22.9	0.09	41.6	0.16
10	120V	42.1	0.30	84.2	0.70
10	277V	41.5	0.15	83.0	0.30

Electronic multi-volt (120-277VAC), constant current LED driver



Recessed Linear LED



PROJECT: TYPE:

Ordering Information

1 2 3 4 5 6 7 8 9 10

1 Model

EDR-1730-GRUV2.5-IS-J/GB-COVE-A16 - j-mold/gyp board trimless

EDR-1730- GRUV2.5-IS-J/GRID-COVE-A16 - j-mold/grid EDR-1730- GRUV2.5-IS-J/FLG-COVE-A16 - j-mold/ flange

Optics

PL - performance lens (standard)

DL - designer lens

<u>Wattage</u> (per foot)

Standard:

5 - 5W/ft

10 - 10W/ft

Optional:

3 - 3W/ft (4' minimum length required)

4 - 4W/ft (4' minimum length required)

6 - 6W/ft

7 - 7W/ft

8 - 8W/ft

9 - 9W/ft

Color Temp

 83 CRI:
 90+ CRI:

 27 - 2700K-83
 279 - 2700K-90+

 30 - 3000K-83
 309 - 3000K-90+

 35 - 3500K-83
 359 - 3500K-90+

 40 - 4000K-83
 409 - 4000K-90+

5 Finish

HW - high reflectance white

6 <u>Voltage</u> 120/277

7 Length

	X)	(
(Length A)	(Length B)	(Length C)
Length A (used for)	Length B (used for)	Length C (used for)
- all patterns	- all patterns	- PU
- IND	- PR - 2 lengths	- PZ
- CON	of 2	
- CUS		

Configuration

IND¹ - individual fixture, 2' to 8' in 1' increments

CON - continuous run > than 8', specify to nearest foot

CUS - custom made to measure, +/- 1/8" of customer supplied field dimensions

Standard Patterns (see page 8 for details):

PLL - L left, (2) straights + (1) 90° corner, leg right

PLR - L right, (2) straights + (1) 90° corner, leg left

PU - U shape, (3) straight lengths + (2) 90° corners

PR - Rectangle, (4) straight lengths + (4) 90° corners

PZ - Z shape, (3) straight lengths + (2) 90° corners

O Drivers

0-10V - 1% electronic dimming, multi-volt (120-277VAC) constant current driver (standard).

HILUME-H-ECO - Lutron "H" Series, 1% dim, fade to off, EcoSystem

DALI - DALI Dimming 120-277VAC, 1% dim

Options/Accessories

CP - Chicago Plenum (CCEA)

WHIP - 6' whip, 18/5 conductor

EMC-PF² - emergency circuit requires power feed located in last fixture section (for other locations consult factory)

PF² - Extra power feed for additional circuiting

^{1 -} Lengths less than 4' may have restrictions based upon wattage, lengths, drivers or other options.

^{2 -} Not available with IND (individual) configuration.

[†] The "A" refers to the sequential revision in a year and "XX" refers to the year of update. Updates coincide with improved performance while not changing the overall fixture aesthetic and are reflected in the published performance data. Please contact your Amerlux representative for explanations of changes.

Recessed Linear LED



PROJECT: TYPE:

Specifications

Application

Commercial and retail recessed perimeter cove ambient lighting.

Construction

Heavy gauge steel upper housing is secured to aluminum extruded trim rails. Die-formed, cold-rolled steel internal components and external mounting brackets. Numerous configurations accommodate most architectural ceiling conditions.

Die formed steel cove walls - powder coat painted.

Optical

All lenses are snap-in, extruded acrylic, with a maximum length of 8'. Amerlux's proprietary acrylic lens provide excellent transmission while effectively concealing source image.

PL - Performance Lens provides high efficiency with controlled lens surface brightness (standard).

DL - Designer Lens provides flat even glow on lens. Best when lens is in direct or constant view. Such as vertical wall mounted.

LED

Amerlux's boards and patented connector design with brand name LEDs enables Amerlux fixtures to have excellent thermal management and offer a 5 year warranty. Our LED binning is within 3 MacAdam ellipse. Boards are configured for maximum flexibility resulting in even illumination no matter the fixture layout. LED boards are easily replaced in the field with just a Phillips sorew driver.

 $\textbf{Color Temperature Options:}\ 2700\text{K},\ 3000\text{K},\ 3500\text{K},\ 4000\text{K}$

CRI: 83 typical, 90+ typical

R9: 16 @ CRI 83 R9: >50 @ CRI 92

Life: 50,000+ hr., > 70% of initial lumens (L70)

Electrical

Wiring: Supply wires are easily accessible through access plate on top of fixture.

WHIP: Optional factory installed 6' Greenfield whip (18/5 conductor) simplifies installation.

Standard Wattage: 5W/ft, 10W/ft.

Optional Wattages: 3W/ft, 4W/ft, 6W/ft, 7W/ft, 8W/ft, 9W/ft. (3W & 4W have a minimum length of 4'). For other wattages consult factory. Emergency circuit via remote inverter or auxiliary emergency power supply (by others).

This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux® recommends using additional surge protection with this unit (supplied by others), surge and over voltage damage is not covered under warranty.

EMC-PF - Emergency circuit requires power feed to be located in last fixture section for continuous runs. For other locations consult factory. Not available for individual (IND) configuration.

PF - Extra power feed for additional circuiting. Not available for individual (IND) configuration.

Drivers

 $\bf 0\text{-}10V$ - 1% electronic dimming, multi-volt (120-277VAC) constant current driver (standard). Cap leads for non-dim applications.

Optional Drivers:

HILUME-A-LTE - Lutron "A" Series, 1% dim, 2-wire, 120V only
HILUME-H-ECO - Lutron "H" Series, 1% dim, fade to off, EcoSystem
DALI - DALI Dimming 120-277VAO, 1% dim

Finish

HW - High reflectance, matte white powder coat paint. Baked on finish for maximum durability and color stability.

Configurations/Lengths

IND - Individual fixtures are made of single standard lengths of 2 ft to 8 ft (in 1' increments). These are stand alone fixtures with matching End Caps, supplied with the mounting hardware. Lengths less than 4' may have restrictions based upon wattage, lengths, drivers or other options. CON - Continuous runs, > 8', specified to nearest whole foot length in 1' increments. Runs made from standard lengths have End Caps at the

increments. Runs made from standard lengths have End Caps at the beginning and end of run. Runs > 60' may require second power feed. Each Housing has factory installed alignment pins. Mating fixtures are easily aligned and joined with "catch and latch" mechanisms out of sight, on top of the Housing. Wiring is made fast and positive with molded quick connectors.

CUS - Custom made to measure runs are made to nearest 1/8" of customer

supplied field measurements or drawings. Custom lengths use the same hardware for hairline joining. **PXX** - Standard Patterns consist of 90° corners with standard lengths (4' to 8' in 1' increments), continuous runs or made to measure lengths.

Depending upon complexity of the pattern drawings may be required from the Customer. If ordering please give overall lengths.

A'-B'-PLL - L Left - (1) 90° Corner 2 segments. Specify overall segments: A'

& B'
A'-B'-PLR - L Right - (1) 90° Corner 2 segments. Specify overall segments:

A' & B'
A'-B'-PR - Rectangle - (4) 90° Corners joining 4 segments. Specify overall

segments: A' & B'
A'-B'-C'-PU - U shape - (2) 90° Corners joining 3 segments. Specify overall

segments: A', B', & C'
A'-B'-C'-PZ - Z shape - (2) 90° Corners joining 3 segments. Specify overall

A'-B'-C'-PZ - Z shape - (2) 90° Corners joining 3 segments. Specify overall segments: A', B', & C'

See page 8 for layouts.

Mounting

Intended for use in gypsum board, 9/16" Tee grid and Screw Slot, and millwork ceilings. Wall mounting J-Molding details available. For individual, continuous row, or pattern applications.

<u>Please note</u> - fixtures to be installed before gypsum board ceiling. GRUV2.5-IS-J/GB-COVE - J mold/gyp trimless, plastered in ceiling - J Channel wall side

GRUV2.5-IS-JJGRID-COVE - J mold/grid, in 9/16" Screw Slot or Flat Tee ceilings - J Channel wall side

GRUV2.5-IS-J/FLG-COVE - J mold/flange - J Channel wall side

Certifications

Approved to UL standards for damp locations as tested by OSA Intended for indoor use only

Chicago Plenum (CCEA) optional

Warranty


Amerlux's 5 year limited warranty. Please consult Amerlux website for details.

Recessed Linear LED




PROJECT: TYPE:


GRÜV2.5-IS-J/GB-COVE (j-mold/gyp board trimless)

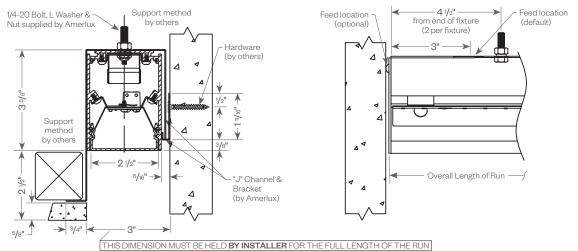


GRÜV2.5-IS-J/GRID-COVE (j-mold/grid mount)

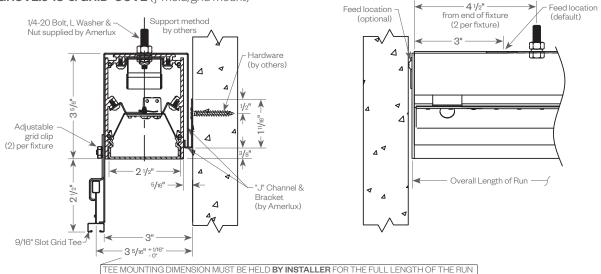

GRÜV2.5-IS-J/FLG-COVE (j-mold/flange)

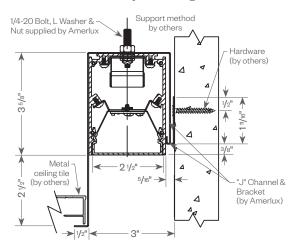

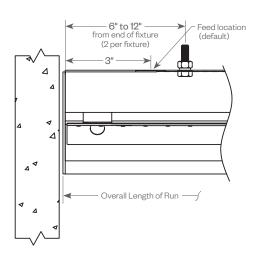

Recessed Linear LED



PROJECT: TYPE:

GRUV 2.5" PATTERNS:

Standard Patterns

All corners are standard 90°, standard length legs.

Use standard lengths: 4' min to 8' in 1 foot increments.

Continuous runs must be the same length in pairs for closed configuration.

Custom Patterns


Please provide drawings of your configuration.

Made to Measure: +/- 1/8", consult factory.

PC - custom pattern, please provide drawings and consult factory




Gruv 2.5 Lens Mitered Lens

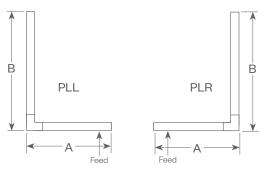


PLL - L Left, (2) straights + (1) 90° corner, leg right PLR - L Right, (2) straights + (1) 90° corner, leg left

Provide overall lengths: A' & B'


Nomenclature: A-B-PLL A-B-PLR

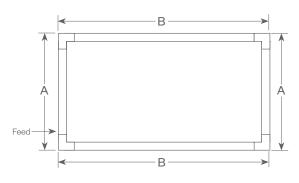

PR - Closed Rectangle, (4) straight lengths + (4) 90° corners Provide overall lengths: A' & B' Nomenclature: A-B-PR

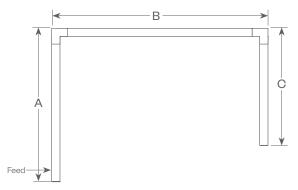

PU - Open U, (3) straight lengths + (2) 90° corners Provide overall lengths: A', B' & C' Nomenclature: A-B-C-PU

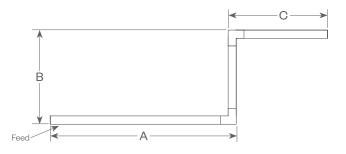

PZ - Open Z, (3) straight lengths + (2) 90° corners Provide overall lengths: A', B' & C' Nomenclature: A-B-C-PZ

Recessed Linear LED



PROJECT: TYPE:

FIXTURE DATA: (Complete photometric data (.ies format) available upon request)


MULTIPLYING FACTORS: (Multiplying Factor is based on 3500K-83120V IES file on website)

Wattage:	3W	4W	5W	6W	7W	8W	9W
Factor:	0.63	0.82	1.0	1.17	1.34	1.50	1.64

CCT-CRI:	2700K-83	3000K-83	3500K-83	4000K-83	2700K-90+	3000K-90+	3500K-90+	4000K-90+
Factor:	0.91	0.96	1.0	1.01	0.80	0.84	0.88	0.89

GRÜV 2.5" PERFORMANCE LENS 5W 3500K 4FT

Total Watts: 20 Total Lumens: 1,972 Source: 128 White LEDs



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	1028	52.1
0-60	1645	83.4
0-90	1971	100.0
90-180	0	0.0

Luminaire Efficacy = 99.5 lm/w


COEFFICIENTS OF UTILIZATION

MEI 110 01 01	12/1/014		
	8	80	
70	50	30	10
2292	2292	2292	2292
2108	2029	1958	1894
1930	1792	1677	1579
1770	1592	1453	1340
1630	1425	1273	1155
1507	1285	1128	1010
1398	1167	1008	893
1302	1065	909	798
1217	978	825	718
1141	903	754	652
1074	837	693	596
	2292 2108 1930 1770 1630 1507 1398 1302 1217 1141	70 50 2292 2292 2108 2029 1930 1792 1770 1592 1630 1425 1507 1285 1398 1167 1302 1065 1217 978 1141 903	2292 2292 2292 2108 2029 1958 1930 1792 1677 1770 1592 1453 1630 1425 1273 1507 1285 1128 1398 1167 1008 1302 1065 909 1217 978 825 1141 903 754

Note: Values expressed as Lumens delivered to the task surface.

GRÜV 2.5" PERFORMANCE LENS 10W 3500K 4FT

Total Watts: 40 Total Lumens: 3,662 Source: 128 White LEDs



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	1910	52.1
0-60	3056	83.4
0-90	3662	100.0
90-180	0	0.0

Luminaire Efficacy = 92.1 lm/w

COEFFICIENTS OF UTILIZATION

RC		8	80	
RW	70	50	30	10
RCR				
0	4258	4258	4258	4258
1	3915	3769	3637	3517
2	3584	3328	3115	2933
3	3288	2957	2698	2489
4	3028	2648	2365	2146
5	2799	2388	2095	1876
6	2598	2167	1873	1659
7	2419	1979	1688	1482
8	2261	1818	1533	1335
9	2121	1678	1401	1212
10	1995	1556	1288	1107

Note: Values expressed as Lumens delivered to the task surface.

Recessed Linear LED



PROJECT: TYPE:

FIXTURE DATA: (Complete photometric data (.ies format) available upon request)


MULTIPLYING FACTORS: (Multiplying Factor is based on 3500K-83120V IES file on website)

Wattage:	3W	4W	5W	6W	7W	8W	9W
Factor:	0.63	0.82	1.0	1.17	1.34	1.50	1.64

CCT-CRI:	2700K-83	3000K-83	3500K-83	4000K-83	2700K-90+	3000K-90+	3500K-90+	4000K-90+
Factor:	0.91	0.96	1.0	1.01	0.80	0.84	0.88	0.89

GRÜV 2.5" DESIGNER LENS 5W 3500K 4FT

Total Watts: 20 Total Lumens: 1383 Source: 128 White LEDs



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	609	44.0
0-60	1074	77.7
0-90	1383	100.0
90-180	0	0.0


Luminaire Efficacy = 69.8 lm/w

COEFFICIENTS OF UTILIZATION

RC		80	0	
RW	70	50	30	10
RCR				
0	1609	1609	1609	1609
1	1462	1400	1344	1293
2	1324	1218	1129	1053
3	1205	1068	962	876
4	1102	947	831	742
5	1013	846	727	639
6	935	762	644	558
7	868	691	575	492
8	808	631	518	439
9	756	580	470	395
10 Note: Values e	709 expressed	536 I as Lumens de	430 elivered to the	358 e task surface.

GRÜV 2.5" DESIGNER LENS 10W 3500K 4FT

Total Watts: 40 Total Lumens: 2567 Source: 128 White LEDs



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fix
0-40	1130	44.0
0-60	1993	77.7
0-90	2567	100.0
90-180	0	0.0

Luminaire Efficacy = 64.6 lm/w

COEFFICIENTS OF UTILIZATION

RC		8	80	
RW	70	50	30	10
RCR				
0	2985	2985	2985	2985
1	2712	2597	2494	2400
2	2457	2260	2095	1954
3	2235	1983	1784	1625
4	2044	1756	1542	1376
5	1879	1570	1350	1185
6	1736	1414	1194	1034
7	1610	1283	1067	914
8	1500	1172	961	815
9	1402	1076	873	733
10 Note: Valu	1316 ues expressed	994 as Lumens d	797 elivered to the	665 e task surface

Recessed Linear LED



PROJECT: TYPE:

DIMMING COMPATIBILITY:

Amerlux® Gruv fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc.) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

0-10V - DIMMING (Standard)

Integrates into a variety of building management and daylighting controls

Notes:

- 120VAC or 277VAC*
- · Dims down to 1% light output
- · Requires interface to turn off power to driver
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!

Compatible Dimmers[†]:


Wall Box

<u>Lutron:</u>	Wattstopper:	<u>Leviton:</u>
Diva - DVSTV	ADF-120277	Renoir II
Maestro - MS-Z101		
Nova-T - NTSTV-DV		

Center System

Lutron Grafixk Eye with GRX-TV1 Interface

0-10V Wiring Diagram

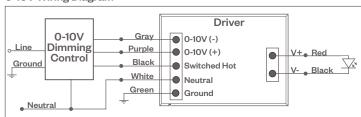

LUTRON HI-LUME ECOSYSTEM DIMMING


Integrates into Lutron EcoSystem building management

Notes:

- 120VAC or 277VAC*
- Dims down to 1% light output
- · EcoSystem Control
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!

HILUME-H-ECO

EcoSystem Digital Control Wiring Diagram

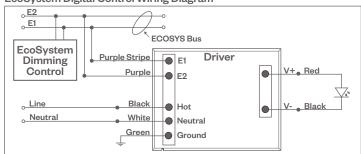

Compatible Dimmers†:

Homeworks QS/My Room

Quantum Hub

Lutron ECO System	Cen
Pow Pak Dimming Modules	Lutr
Energi Savr Node	
Grafik Eye QS/Homeworks	
OS Control Unit	

Central System

Lutron EcoSystem compatible controls

Notes:

- * Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.
- † The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

Recessed Linear LED



PROJECT:

DIMMING COMPATIBILITY:

Amerlux® Gruv fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

DALI - DALI DIMMING 120V-277V

Digital control protocol allows individual fixture control

Notes:

- 120VAC 277VAC*
- Dims down to 1% light output in most cases

Compatible Dimmers[†]:

Wall Box


Leviton CD250 Controller

Center System

Dynalite

Fifth Light

DALI Wiring Diagram

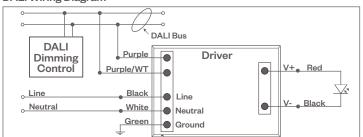

- * Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.
- † The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.