# L502

### **INTERIOR**

Recessed Downlight

Dry location







Shown with Coil Spring Clip

Orderi	ng Inforn	nation					Clear Form		
Date :					Quantity:				
Project					Note:				
Type:									
Specif	fications								
Lumina	<b>ire  </b> Examp	ole Code: L502-2-W30H	-N-BA						
Product	Wattage 1	CCT & CRI <sup>2</sup>	Beam Angle	Trim Finish <sup>3</sup>					
L502	2								
	<b>2</b> 2W	Standard (80+) CRI: W22S 2200K 80+	S spot 12° N narrow flood 30°	MA matte clear anodiz BA black anodized	red				
		High (90+) CRI:	F flood 48°	BZ bronze powder coat WH white powder coat					
		<b>W27H</b> 2700K 90+ <b>W30H</b> 3000K 90+							
		<b>W35H</b> 3500K 90+ <b>W41H</b> 4100K 90+							
System	Componer	nts (Ordered Separately	y)						
Remote	Driver:				* Consult MP Lig	hting Website or Factory			
Important Notes									
Specification  1. Available 120V. Consult factory for other voltage options.									
Refer to     Refer to	<ol> <li>Refer to pg.2 - for light quality and colour consistency details.</li> <li>Refer to Appendix or MP Lighting website for complete look of luminaire with different finish options.</li> </ol>								
Warranty	Notes & Dis	sclaimer							

Malfunction and damage to product due to incompatible dimming system or misuse will not be covered under warranty. Consult MP Lighting for recommended drivers. If the fixture has an option to be installed with a dimming control system, consult a dimming system manufacturer with minimum load before installing. MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products. Consult MP Lighting website for most updated documentation.

# L502

### **INTERIOR**

Recessed Downlight

Dry location







Shown with Coil Spring Clip

Perf	form	ance
------	------	------

Wattage	Forward Current	Power Consumption Budget per fixture (including driver)	LED output (Source)	Fixture Output (Delivered)
2W	700mA	3W	220 lm	107-133 lm

### Application

Environment Dry Location approved. IP 40.

Mounting Recessed mount to cabinet millwork with coil spring clips. Comes with 2" (610 mm) wire lead.

Cut out size: 2" (610mm)

### Electrical

Electrical Remote LED drivers (120-277V AC input, constant current output). Fixtures to be wired in series.

Control On/off control

**Dimming:** ELV or 0-10V dimming with appropriate drivers

Other options (consult factory): TRIAC/MLV, DMX, DALI, Casambi, Power over Ethernet

### **Luminaire Construction**

LED Light Source W22S = CCT: 2200K, CRI (Ra): 80+, Colour Consistency: 3SDCM

W27H = CCT: 2700K, CRI (Ra): 90+, Colour Consistency: 2SDCM W30H = CCT: 3000K, CRI (Ra): 90+, Colour Consistency: 2SDCM W35H = CCT: 3500K, CRI (Ra): 90+, Colour Consistency: 2SDCM W41H = CCT: 4100K, CRI (Ra): 90+, Colour Consistency: 3SDCM

Weight N/A

Material Fixture: Solid anodized aluminum

Supplied with Standard installation housing: Comes with unviersal crossbar and mounting screws (2).

Warranty & LED Life 5 years limited warranty

Estimated useful life of LED is 50,000 hours.

### Ordered Separately


System Components Power supplies: remote driver


Please consult factory or visit Recommended Drivers for available driver options.


### **Mounting Options & Dimensions**

#### **LED Fixture Dimensions**

Fixture dimension Coil Spring Clip dimension Fixture (Top View) 3D View









## Appendix

#### **Aluminum Finishes**






MA matte clear anodized

BA black anodized

## 2W, 2700K, 90+ CRI

### **Polar Candela Distribution**



Beam Width: 12°




### Illuminance at a Distance

Distance		Center Beam fc	Beam Width			
3.0ft	0.91m	50.0fc	0.7ft	0.21m	0.7ft	0.21m
6.0ft	1.83m	12.0fc	1.3ft	0.39m	1.3ft	0.39m
9.0ft	2.74m	5.3fc	2.0ft	0.60m	2.0ft	0.60m
12ft	3.66m	3.0fc	2.7ft	0.82m	2.7ft	0.82m
15ft	4.57m	1.9fc	3.3ft	1.00m	3.3ft	1.00m
18ft	5.49m	1.4fc	4.0ft	1.21m	4.0ft	1.21m

■ Vertical Beam Spread : 12.6° ■ Horizontal Beam Spread : 12.6°

### **Polar Candela Distribution**



### Beam Width: 30°




#### Illuminance at a Distance

Dis	tance	Center Beam fc	Beam Width			
3.0ft	0.91m	34.0fc	1.6ft	0.48m	1.6ft	0.48m
6.0ft	1.83m	8.0fc	3.2ft	0.97m	3.2ft	0.97m
9.0ft	2.74m	3.5fc	4.8ft	1.46m	4.8ft	1.46m
12ft	3.66m	2.0fc	6.3ft	1.92m	6.3ft	1.92m
15ft	4.57m	1.3fc	7.9ft	2.22m	7.9ft	2.22m
18ft	5.49m	0.9fc	9.5ft	2.89m	9.5ft	2.89m

■ Vertical Beam Spread : 29.6° ■ Horizontal Beam Spread : 29.6°

### Polar Candela Distribution



Beam Width: 48°




### Illuminance at a Distance

Distance		Center Beam fc	Beam Width			
3.0ft	0.91m	13fc	2.5ft	0.76m	1.3ft	0.39m
6.0ft	1.83m	3.0fc	5.0ft	1.52m	2.6ft	0.79m
9.0ft	2.74m	1.4fc	7.6ft	2.31m	3.9ft	1.18m
12ft	3.66m	0.8fc	10.1ft	3.07m	5.2ft	1.58m
15ft	4.57m	0.5fc	12.6ft	3.84m	6.5ft	1.98m
18ft	5.49m	0.4fc	15.1ft	4.60m	7.8ft	2.37m

■ Vertical Beam Spread : 45.5° ■ Horizontal Beam Spread : 24.5°

### Warm Dimming VS. Halogen

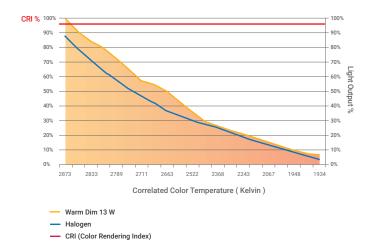

## Full Spectrum

