High Performance Recessed (HPR LED) 2x2, Surface Mount, Standard Output (S), Boosted Standard Output (B)







Project

Type


Comments

Refer to page 2 for all door styles

DESCRIPTION


HPR LED Surface Mount is a highly efficient luminaire delivering excellent visual comfort and outstanding

This Product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving Red List Approved and Declared status.



Shown with Surface Mount kit

DIMENSIONS

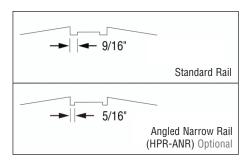

ANGLED NARROW RAIL OPTION

Available in angled door style with the same center optic choices. The optional narrow rails are approximately 5/16" wide. The standard center rails are approximately 9/16" wide.




100% SERVICEABLE FROM BELOW

The replaceable light engine and driver are easy to access from below the ceiling.

ORDERING GUIDE

Sample Number: HPR LED - A - 2x2 - DCO - S - 835 - 277V - SC - SM - OBO - RLA

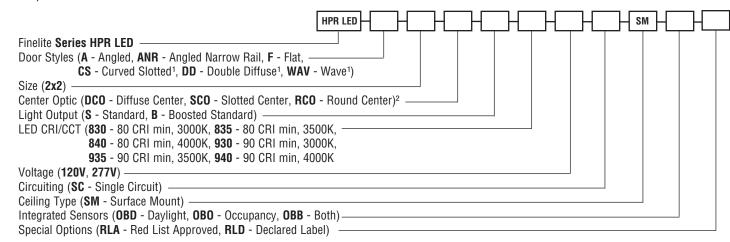

¹ Curved Slotted, Double Diffuse and Wave door not available with Center Optic options


² Only available with Angled (A), Angled Narrow Rail (ANR) and Flat (F) door options

A brand of Lilegrand


© 2020 FINELITE, INC. ALL RIGHTS RESERVED. Form CTK0089. V5. EFFECTIVE DATE: 07/20

FINELITE High Performance Recessed (HPR LED) 2x2, Surface Mount, Standard Output (S). Beauty 100 Processor of the standard Output (S). Beauty 100 Processor of the standard Output (S). Beauty 100 Processor of the standard Output (S).


DOOR STYLES



A - Angled ANR - Angled Narrow Rail




F - Flat




WAV - Wave

DOOR STYLES



CS - Curved Slotted




DD - Double Diffuse


CENTER OPTICS



DCO - Diffuse Center



SCO - Slotted Center

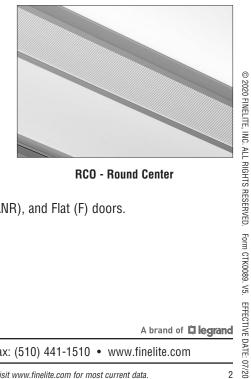

RCO - Round Center

DCO, SCO, and RCO are only available on Angled (A), Angled Narrow Rail (ANR), and Flat (F) doors.

High Performance Recessed (HPR LED) 2x2, Surface Mount, Standard Output (S), Boosted Standard Output (B)


PHOTOMETRY

HPR LED-A-2x2-DCO-V Very High Output - Angled Rail Efficacy: 111 lumens per watt Total luminaire output: 6436 Lumens 58.1 Watts

Peak Cadela Value: 2574 @ 0°

CCT: 3500K

ITL LM79 Report 85142



Angled (A) and Flat (F) Total Light Output, 3500K, 80 CRI (Lumens)		
S*	B**	
3397	4367	
Power (Watts)		
S *	B**	
28.5	37.1	
Efficacy, 3500K, 80 CRI (Lumens Per Watt)		
S*	B**	
119	118	

^{*} Family Correlation based on 3500K Very High Output (V) test - 120V.

^{**} Based on source ITL report: 85142

Angled Narrow Rail (ANR) Total Light Output, 3500K, 80 CRI (Lumens)		
S*	Β ^γ	
3276	4212	
Power (Watts)		
S *	B [¥]	
28.5	37.2	
Efficacy, 3500K, 80 CRI (Lumens Per Watt)		
S *	B [¥]	
115	113	

^{*} Family Correlation based on 3500K Very High Output (V) test - 120V.

CANDLEPOWER SUMMARY						
	0.0	22.5	45	67.5	ACROSS	Flux
0	2574	2574	2574	2574	2574	
5	2561	2561	2560	2559	2560	243
10	2519	2517	2515	2514	2514	
15	2440	2439	2441	2442	2444	688
20				2344	-0 .,	
25	2199	2199	2207	2217	2224	1016
30			2052		2076	
35	1861	1863	1877		1907	1175
40	1668	1671	1690	1 <i>7</i> 13	1 <i>7</i> 21	
45	1475	1473		151 <i>7</i>		1154
50	1272	1272		1314		
55	1075	1074	1093		1116	978
60	880	880	894	909		
65	693	696	702	712	718	699
70	519	519	524	532	537	
75	356	354	3 <i>57</i>		367	382
80	211	209	210	213	216	
85	90	87	85	83	85	101
90	0	0	0	0	0	

Lumen Adjustment Factors - 80 CRI		
3000K	0.985	
3500K	1.000	
4000K	1.032	

Lumen Adjustment Factors - 90 CRI		
3000K	0.746	
3500K	0.760	
4000K	0.789	

Apply a lumen adjustment factor to calculate lumens for the desired CCT and CRI

SAMPLE LUMEN ADJUSTMENT CALCULATION

Standard Output (S) Angled (A) Flat (F) 4000K, 90 CRI

Lumen Adjustment Factor = 0.789

Total Light Output = $3397 \text{ Im } \times 0.789 = 2680 \text{ Im}$

$$Efficacy = \frac{2680 \ lm}{28.4 \ W} = 94 \ lm/W$$

[¥] Based on source ITL report: 85148

S - Standard Output, B - Boosted Standard Output

High Performance Recessed (HPR LED) 2x2, Surface Mount, Standard Output (S), Boosted Standard Output (B)

Wave (WAV) Total Light Output, 3500K, 80 CRI (Lumens)		
S*	B [†]	
3470	4461	
Power, 3500K, 80 CRI (Watts)		
\$*	B [†]	
28.5	37.2	
Efficacy, 3500K, 80 CRI (Lumens Per Watt)		
S *	B⁺	
122	120	

^{*} Family Correlation based on 3500K Very High Output (V) test - 120V.

[†] Based on source ITL report: 85836

Double Diffuse (DD) Total Light Output, 3500K, 80 CRI (Lumens)		
S *	B±	
2720	3497	
Power, 3500K, 80 CRI (Watts)		
\$*	B±	
28.6	37.2	
Efficacy, 3500K, 80 CRI (Lumens Per Watt)		
S *	B±	
95	94	

^{*} Family Correlation based on 3500K Very High Output (V) test - 120V.

Curve Slotted (CS) Total Light Output, 3500K, 80 CRI (Lumens)		
S*	B‡	
3236	4161	
Power, 3500K, 80 CRI (Watts)		
S *	B‡	
28.5	37.2	
Efficacy, 3500K, 80 CRI (Lumens Per Watt)		
S*	B‡	
114	112	

^{*} Family Correlation based on 3500K Very High Output (V) test - 120V.

^{*} Based on source ITL report: 86019

Lumen Adjustment Factors - 80 CRI		
3000K	0.985	
3500K	1.000	
4000K	1.032	

Lumen Adjustment Factors - 90 CRI		
3000K	0.746	
3500K	0.760	
4000K	0.789	

Apply a lumen adjustment factor to calculate lumens for the desired CCT and CRI.

[±] Based on source ITL report: 85154


S - Standard Output, B - Boosted Standard Output

High Performance Recessed (HPR LED) 2x2, Surface Mount, Standard Output (S), Boosted Standard Output (B)

WIRING ACCESS DETAIL

9 5/8" -1.5/16 1/2"

MOUNTING INFORMATION

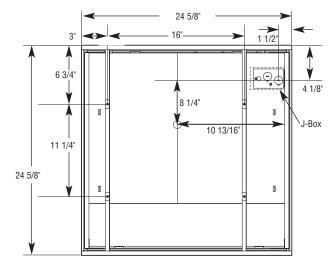

SPECIFICATIONS

CONSTRUCTION: Die-formed 20-gauge cold-rolled steel housing. All components are hard-tooled to tolerances of +/- 0.010". Driver compartment is accessible from below. UV stabilized weather-strip pile gasket with polypropylene backing. Hinged door frame assembly provides easy access to light arrays and driver compartment for servicing from below. Seismic brackets are integrated into the luminaire assembly.

REFLECTORS: Die-formed 20-gauge cold-rolled steel reflectors are finished in 96LG high reflectance matte white powder coat paint.

AIR RETURN: Refer to 2x2 Air Return Tech Sheet for more information.

OPTICAL SYSTEM: Components include diffuser panels and a central optic element held in place with a frame constructed from die-formed cold-rolled steel. The diffusers are UV-stabilized and impact-resistant frosted virgin acrylic, 0.120" thick. They are either angled toward the central optic or parallel to the ceiling plane. The center optical element is held in place by sleek steel rails. The standard center rails are approximately 9/16" wide. Optional narrow rails are approximately 5/16" wide. Optional wave door includes frosted acrylic panel that undulates from side to side.

DOUBLE DIFFUSE: Visible diffuser: UV-stabilized and impact-resistant frosted virgin acrylic, 0.120" thick. Inner diffuser: 0.120" thick with 60% round perforations white/white.

DOOR STYLE: Curved Slotted (CS) includes perforated rails that slope inward and a diffuse frosted acrylic center optic.

CENTER OPTIC OPTIONS: Only available with Angled (A), Angled Narrow Rail (ANR), and Flat (F) door styles.

Diffuse Center Optic (DCO): UV-stabilized and impactresistant frosted virgin acrylic. Standard with Wave.

Slotted Center Optic (SCO): Die-formed cold-rolled steel panel with a 1/16" x 1/2" rectangular hole pattern. Virgin acrylic overlay.

Round Center Optic (RCO): Die-formed cold-rolled steel panel with precision-punched 3/32" round hole pattern arranged in staggered formation. Virgin acrylic overlay.

LIGHT OUTPUT: Two lumen packages available, Standard (S), Boosted Standard (B). A separate chart summarizes lumen distribution and wattage. Light engines are replaceable.

LUMEN MAINTENANCE: 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours.

DRIVER: Replaceable 120V/277V Constant Current Reduction dimming driver standard. Can be wired dimming or non-dimming. 0-10V dimming controls with a range of 10%- 100%. Dimming to 1% available, consult factory. Driver is fully accessible from below the ceiling. Power Factor: ≥0.9. Total Harmonic Distortion (THD): <20%. Expected driver lifetime: 100,000 hours.

LUTRON DRIVER OPTIONS: LUTES1 (Hi-lume 1% EcoSystem with Soft-On, Fade to Black dimming (LDE1 series)); LUTES5 (5-Series 5% EcoSystem (LDE5 Series)), LUT2W (Hi-lume 1% 2-wire, 120V forward phase dimming (LTEA series)); Contact factory for availability of discontinued Lutron drivers, L3DA-3wire and L3DA EcoSystem.

ELECTRICAL: Factory-choice low-profile backup battery available. Chicago Plenum option. Bodine BSL722 battery pack also available. Backup batteries deliver 2199 lumens. One half of the 2x2 will be illuminated in emergency mode.



INTEGRATED SENSORS: Integrated PIR (Passive Infrared) occupancy and/or daylight sensors available. Refer to Occupancy

Sensor and Daylight Sensor tech sheets for more info.

MO UNTING: Luminaire is compatible with recessed junction boxes. Electrical connections can be made directly to wiring access plate shown above. Junction boxes can also be placed between mounting bars. Maximum center of feed location from luminaire center is 8 3/4" along the dimension parallel to the mounting bars, and 14" along dimension perpendicular to the mounting bars.

FINISH: Housing and door assembly painted with 96 LG high reflectance matte white powder coat paint. Optional adder: Anti-microbial paint. Contact factory.

FEED: Optional whips (with flex connectors) supplied in a maximum of 11' lengths. Lead Wires.

LABELS: Luminaire and electrical components are ETL-listed conforming to UL 1598 in the U.S.A. and CAN/CSA C22.2 No. 250.0 in Canada. In accordance with NEC Code 410.73 (G), this luminaire contains an internal driver disconnect. Damp Location. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2011/65/EU. Finelite makes the specification process easy when putting healthier products on your projects. Simply add - RLA (Red List Approved) or - RLD (Declared Label) to your part number.

WEIGHT: 16 lbs maximum.

WARRANTY: 10-year performance-based warranty on all standard components. Optional accessories such as emergency battery packs are covered by their individual manufacturer warranties.

A brand of Lilegrand