



ZUMALIGHTING
QUALITY OUTDOOR SOLUTIONS



MODEL
KERRY

TYPE
LED

SERIES
BOLLARDS

ZUMA LIGHTING LLC
325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004
INFO@ZUMALIGHTING.COM • (310) 975-3126 • ZUMALIGHTING.COM

ORDERING INFORMATION

Model KERRY
Type LED
Series BOLLARDS



FIXTURE	SIZE	SOURCE	VOLTS	LAMP / TEMP	OPTICS	COLOR	OPTIONS
KER = KERRY (LED)	18 = 18"H 36 = 36"H 42 = 42"H	10W 15W 20W 30W 40W	U = 120v-277v 8 = 480v	3K = 3000K 4K = 4000K 5K = 5000K	T3 T5	DB = Dark Bronze BK = Black WH = White SL = Silver CC = Custom	SP = Surge Protection PC = Photocell D= Dimming

SPECIFICATIONS

Housing

The fixture shaft is fabricated from heavy duty extruded aluminum. The Top is fabricated from heavy duty spun aluminum.

LED

UNIVERSAL LED modules and drivers, combined with a vertical heat sink and into one configurable unit which gives precise light distribution. It allows us to offer lumen adjustment on light output. These are 10CHIP, 500 LUMEN, 525 mA,,6v. 3.2watt per module, achieving 159 lumens per watt efficacy, 82CRI at 4000K. Beside maximizing heat dissipation surface, we also utilize convection- based heat management which creates additional air flow around the strips. Unlike a big metal heat sink where the temperature for the chips in the middle is higher than the rest, the heat of each of our modules gets dissipated evenly. This innovative heat dissipation design keeps the junction temperature low and ultimately prolongs the life of the LED strips. Our modules are covered by our standard 5-year warranty and are available in many of our fixture's designs. The drivers are dimmable 0-10v.

Lens

Lens is fabricated from frosted acrylic.

Mounting

Cast aluminum base plate secures to the housing. Mounting kit with anchor bolts, included.


Finish

Thermoset polyester oven-baked powder coat, in any standard color. Custom colors are available to your specification.

Certificates & Warranty

- Suitable for Wet Locations
- 5-Year Warranty

Dimensions

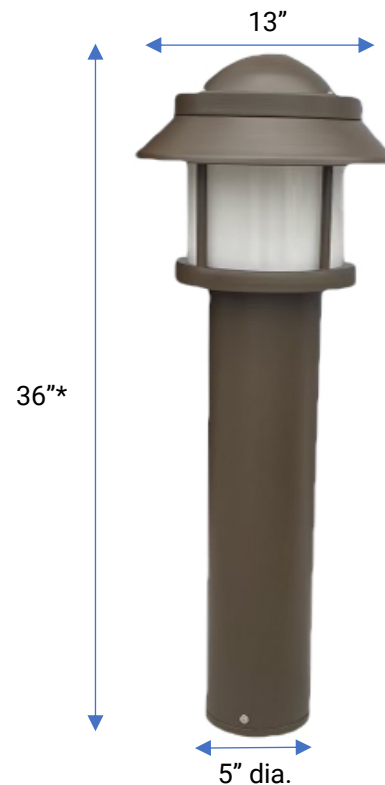

**Also available 18" or 42"*