



Contemporary Wall Sconce

Flush Mount

DESCRIPTION

The Contemporary Wall Sconce Fixture compliments modern commercial or residential design aesthetics. The fixture provides a comfortable illumination. Ideally for new construction or replacement of existing incandescant sconce.

APPLICATIONS

Hospitality, Airports, Schools, Offices, Government Facilities, Residential, and Commercial

FEATURES



Contemporary Wall Sconce

11"/14W (980 lm)

Projected L70: 50,000 hours

Warranty: 5 Years

System Efficacy: 70 LpW

Construction

Steel housing with powder coated paint.
Finish available in Satin Nickel or Bronze.

Electrical

Input Voltage: 120VAC

Optical System

PC lens 220° beam angle provides an even and comfortable diffusion of illumination.

Installation/ Mounting

Flush Mount (Wall) (4" J - box or Octagon J-box)

Warranty


5 Year Warranty.
See warranty documentation for more information.

Controls/Dimming

No Dimming



Damp Location Rated

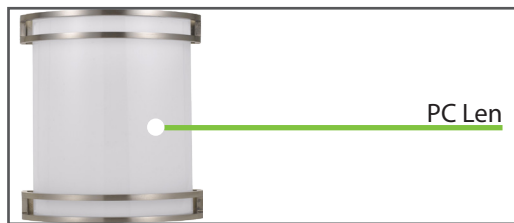

Ordering Information

EXAMPLE: CWS-1114-40-SN

Series	Size/Wattage	CCT	Finish
CWS	1114 - 11"/14W	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K	SN - Satin Nickel *BR - Bronze

Specifications and Dimensions subject to change without notice.

*MOQ and longer lead times may apply, please contact customer service for more information.


Performance Information

Input Voltage	120VAC
Input Frequency	60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
System Efficacy	See Performance Table
CRI	>80
Available CCT	2700K, 3000K, 3500K, 4000K, 5000K
Projected L70	50,000+ hours
Power Factor	>0.9
THD	<20%
Dimming	No
Operating Temp.	-4°~104°F
IP Rating	Damp Location Rated

Photometric Data

14W, 3000K


*IES Available Upon Request

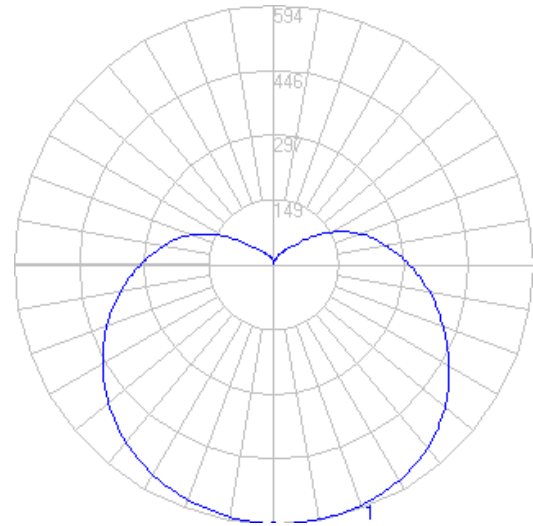

Performance Table

SKU	Size (in)	Wattage (W)	3000K	
			Delivered Lumens (lm)	System Efficacy (lm/W)
CWS-1114-30-XX	11	14	980	70

Product Dimensions

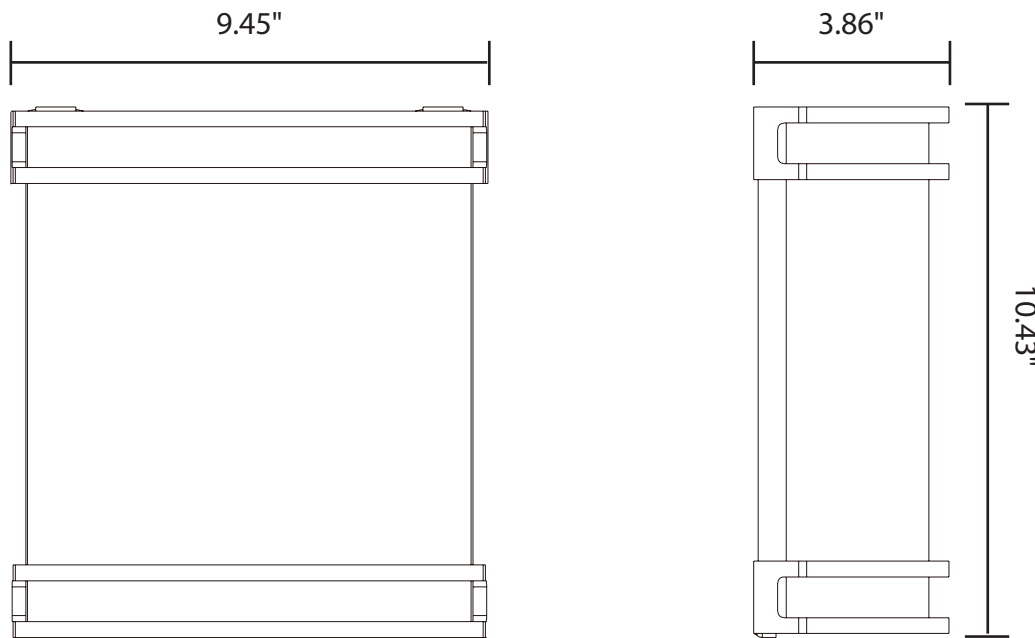

Weight: 2.25 lbs