

Project Name:	Type:
Part Number:	Date:

NYX SERIES

SPECIFICATION FEATURES



0703023

- Mechanical** - NYX Downlight is made from die cast aluminum, for maximizing passive cooling, ensuring long life lasting LED. This series is designed for new construction, remodel, and direct mounting in the ceiling. Stainless steel spring action clips allow for both easy new construction and direct installation from 1/2" to 2" ceiling thicknesses and field accessibility below the ceiling for service or replacement. Galvanized steel plaster frame. Low profile bar hangers with non-pass through construction and leveling flanges, contain integral tee bar clip and preinstalled nail. Bar hangers are adjustable from 13-1/4" to 24-1/2" and can be installed in suspended T-Grid or wood joist ceilings. Optional field installable butterfly brackets with adjustable height are available for C-Channel or rod installation.
- Electrical** - Proprietary potted driver for optimal heat protection ensure long life of electronics components. Field select from four or three lumen outputs using SelectDrive technology. The driver also features DualDim Technology, for maximum adaptability in any spaces whether it's commercial, residential or mixed. Rated for 120 to 277V, 50/60 Hz the driver is both 0-10V dimmable to 5% with low-end cut off and Forward and Reverse phase dimmable at 120V down to 10%. Please consult dimmer compatibility for additional information. Sound rating <22db. Optional integrated EM driver available, and control options. Standard driver also comes with a 12V auxiliary port that provides power for field installed sensors and control modules.
- Optical** - Non conductive polycarbonate plated reflectors available in clear, matte white, white baffle or black baffle, are field interchangeable allowing for service or replacement to evolve with the space. Fully deadfront reflector and flange are available in full clear and full white finishes. High resistance and non yellowing polycarbonate lenses for optimal low glare light diffusion. Featuring SelectKelvin technology with field selectable CCTs 2700/3000/3500/4000/5000K. LED binning within 4 SDCM maximum. Offered in minimum 90 CRI. 90° optical wide beam angle diffuser with 1.2 SC, 70° medium fresnel optic with 1.0 SC or wall wash insert are available for optimal distribution.
- Thermal** - Die cast fixture maximizes passive thermal management and achieves a L70 calculated lifetime of 100,000 hours, at 25°C according to TM-21-11 requirements. Ambient temperature rated from -40°F to 113°F (-40°C to 45°C). IC installation for IC rated parts limited to +35°C (95.0°F) ambient temperature. IC cover are also available.
- Compliance and Warranty** - ETL Classified and Listed for wet location from the bottom once properly installed. Certified air-tight per ASTM 283-04. Complies with FCC 47CFR Part 15B consumer limits for EMI/RFI emissions at 120V. Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements. For IC rating information please refer to the IC rating table. Can be used for State of California Title 24 high efficacy LED compliance under JA8. 5 Year Warranty for complete fixture. Optional 10 Year Extended Warranty available, subject to same terms, conditions and installation requirements as standard 5 Year Warranty.



BENEFITS

- SelectDrive technology allows to select from 3 or 4 lumen outputs
- NYX provides the easiest retrofitting or new installation dimming compatibility with DualDim technology
- Install virtually anywhere with Wet Location, IC rated models and Air-tight ratings
- Multiple finishes and beam available to match your most demanding design requirement
- Long life time in high ambient temperature range installation
- Quick and easy installation for both new construction or direct mount

APPLICATIONS

- Commercial
- Retail
- Hospitality
- Education
- Outdoor under covered ceilings



NYX SERIES

ORDERING EXAMPLE

NYX+Type+Size+Style _____ Lumen+CRI+CCT _____ Driver _____

Ordering Example NYXNC6RD/S9CCT5S/DUALDIM/MD/CC

Model Serie	Installation Type	Size	Style	Lumen	CRI	CCT	Driver
<input type="checkbox"/> NYX NYX Series downlights	<input type="checkbox"/> NC New Construction Frame	<input type="checkbox"/> 4 4"	<input type="checkbox"/> RD Round	<input type="checkbox"/> S Small Selectable XL/L/M/H 700/1000/1500/2000lm	<input type="checkbox"/> 9 90+ CRI	<input type="checkbox"/> CCT5S Selectable 2700 /3000/3500 /4000/5000K	<input type="checkbox"/> DUALDIM 120V-277V, 50/60Hz. 0-10V or Forward/Reverse phase dimming at 120V only.
	<input type="checkbox"/> ICAT¹ New Construction with IC cover		<input type="checkbox"/> 6 6"				
	<input type="checkbox"/> DM Direct Mount, Remodel						

Optic _____ Reflector and Flange _____ Options _____

Optic	Reflector and Flange	Options
<input type="checkbox"/> WD Wide 90D Distribution 1.2 SC/H	<input type="checkbox"/> CW Clear Reflector with White Flange	<input type="checkbox"/> EM6 6W EM K-Case
<input type="checkbox"/> MD Medium 70D Distribution 1.0 SC/H	<input type="checkbox"/> CC Clear Reflector with Clear Flange (Dead Front)	<input type="checkbox"/> AWNR Lutron Athena Node
<input type="checkbox"/> WW³ Wall Wash	<input type="checkbox"/> WW White Reflector with White Flange (Dead Front)	
	<input type="checkbox"/> WBW White Baffle Reflector with White Flange	
	<input type="checkbox"/> BBW Black Baffle Reflector with White Flange	

1. For 6" M Light Engine only, other model are ICAT rated without frame cover. 2. Only available for 6" Round Model. 3. Only available in Clear or Matte White finish. Not compatible with WBW and BBW reflectors.

REFLECTOR STYLE



TECHNICAL INFORMATION

Product	Dimming	Input Voltage	Input Frequency	Max Input Current	Max Input Power	THD Power	Power Factor	Flicker Index	Sound Rating
4" Round S	0-10V and ELV/TRIAC	120-277V	50-60Hz	230mA	20W	<20%	>0.9	<30%	<22db
4" Square S				230mA	20W				
6" Round S				230mA	20W				
6" Square S				230mA	20W				
6" Round M				460mA	40W				



NYX SERIES

NOMINAL PERFORMANCE

Type	Wattage (W)	2700KCCT / CRI90		3000KCCT / CRI90		3500KCCT / CRI90		4000KCCT / CRI90		5000KCCT / CRI90	
		Lumens (lm)	Efficacy (LPW)	Lumens (lm)	Efficacy (LPW)	Lumens (lm)	Efficacy (LPW)	Lumens (lm)	Efficacy (LPW)	Lumens (lm)	Efficacy (LPW)
4" Round S with Reflector	7.5	675	90	695	93	720	96	730	97	740	99
	10	900	90	925	93	960	96	975	98	987	99
	15	1,350	90	1,385	92	1,440	96	1,460	97	1,480	99
	21	1,900	90	1,950	93	2,000	95	2,000	95	2,000	95
4" Square S with Reflector	7.5	694	93	712	95	740	99	750	100	750	100
	10	925	93	950	95	985	99	1,000	100	1,000	100
	15	1,387	92	1,425	95	1,481	99	1,500	100	1,500	100
	21	2,000	95	2,050	98	2,100	100	2,100	100	2,100	100
6" Round S with Reflector	7.5	703	94	722	96	750	100	750	100	750	100
	10	938	94	963	96	1,000	100	1,000	100	1,000	100
	15	1,406	94	1,444	96	1,500	100	1,500	100	1,500	100
	21	2,000	95	2,000	95	2,100	100	2,100	100	2,100	100
6" Square S with Reflector	7.5	703	94	722	96	750	100	750	100	750	100
	10	938	94	963	96	1,000	100	1,000	100	1,000	100
	15	1,406	94	1,444	96	1,500	100	1,500	100	1,500	100
	21	2,000	95	2,000	95	2,100	100	2,100	100	2,100	100
6" Round M with Reflector	25	2,350	94	2,400	96	2,500	100	2,500	100	2,500	100
	30	2,800	93	2,900	97	3,000	100	3,000	100	3,000	100
	40	3,800	95	3,850	96	4,000	100	4,000	100	4,000	100

REFLECTOR FINISH MULTIPLIERS


Product	Clear	Matte White	White Baffle	Black Baffle
Multipliers ¹	1.0	1.02	0.98	0.82

1. Multipliers for relative lumen values with other reflector finishes

IC RATING

Reflector And Flange / Light Engine	CW	CC	WW	WBW	BBW
4" Round Small	IC standard	With Shallow IC Cover	With Shallow IC Cover	IC standard	IC standard
4" Square Small	IC standard	With Shallow IC Cover	With Shallow IC Cover	IC standard	IC standard
6" Round Small	IC standard	IC standard	IC standard	IC standard	IC standard
6" Square Small	IC standard	IC standard	IC standard	IC standard	IC standard
6" Round Medium	With Large IC Cover	With Large IC Cover	With Large IC Cover	With Large IC Cover	With Large IC Cover

LINE DRAWINGS

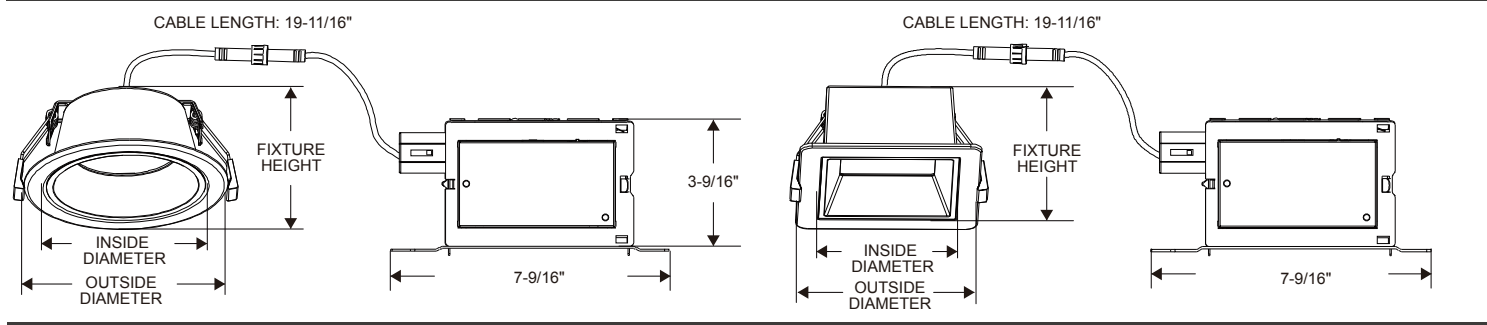


	Size	Inside Diameter	Outside Trim Diameter	Fixture Height	Minimum Cutout	Maximum Cutout
NYX ROUND	4	3-15/16"	5-1/2"	2-1/2"	4-1/2"	4-3/4"
	6	5-1/2"	7-1/16"	2-1/2"	6 1/16"	6-5/16"
NYX SQUARE	4	3-3/8x3-3/8"	4-7/8x4-7/8"	2-1/2"	4x4"	4-1/8x4-1/8"
	6	4-13/16x4-13/16"	6-3/8x6-3/8"	2-1/2"	5-5/16x5-5/16"	5-5/8x5-5/8"




NYX SERIES



LINE DRAWINGS

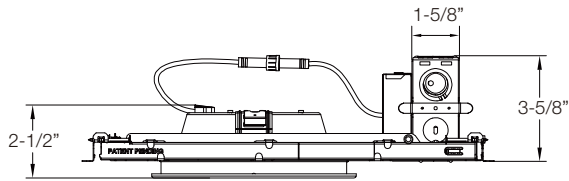


**4" and 6" Round Frame
(shown with 6" Light Engine)**

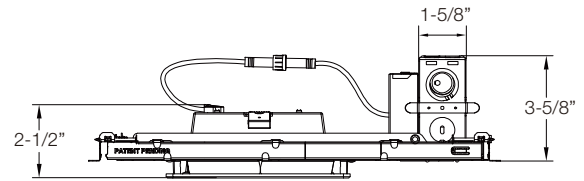


**4" and 6" Square Frame
(shown with 6" Light Engine)**

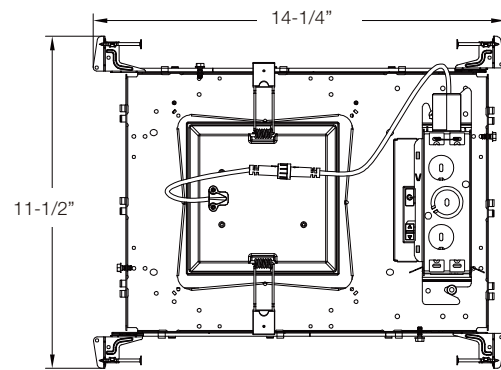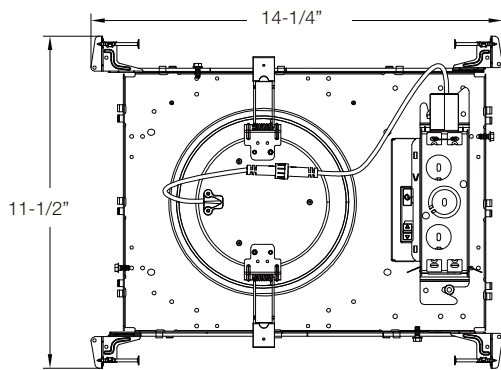



With Shallow IC BOX

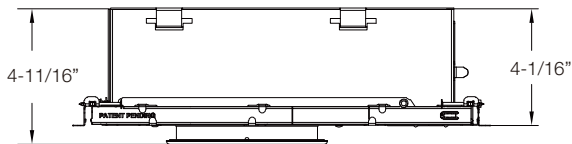

**4" and 6" Round S Lumen Shallow IC Frame Cover
(shown with 6" Light Engine)**

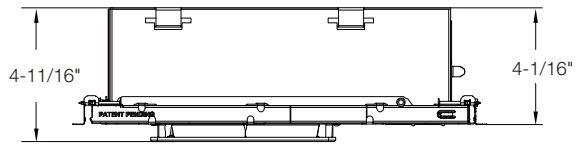

**4" and 6" Square S Lumen Shallow IC Frame Cover
(shown with 6" Light Engine)**

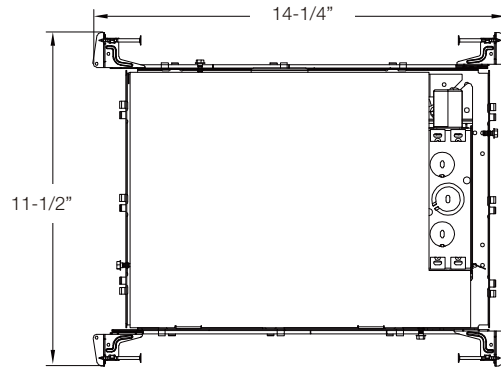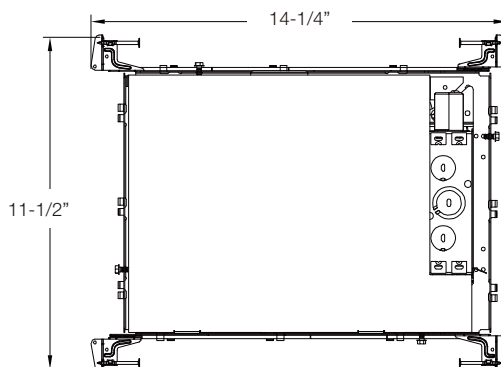





NYX SERIES

LINE DRAWINGS


With Large IC Box

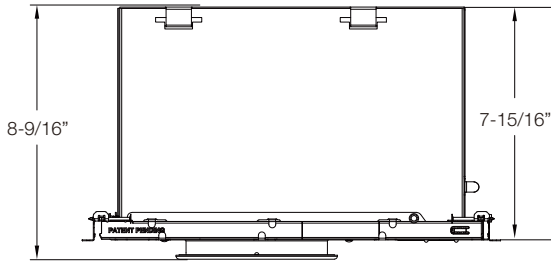



6" Round M Lumen Large IC Frame Cover
(shown with 6" Light Engine)

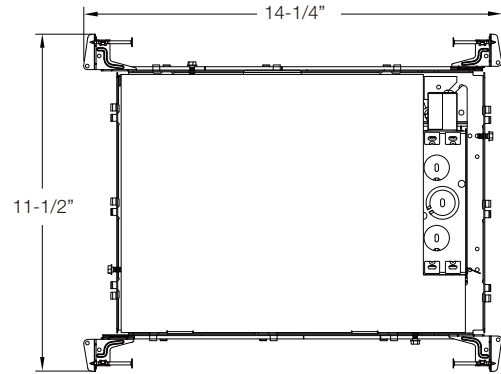




With EM

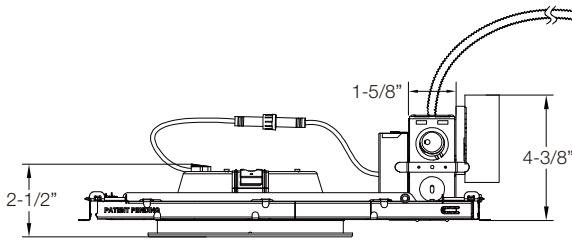

4" and 6" Round Frame with EM6
(shown with 6" Light Engine)

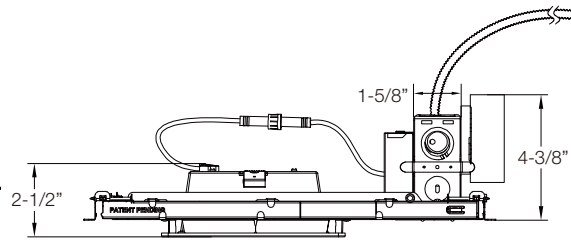

4" and 6" Square Frame with EM6
(shown with 6" Light Engine)

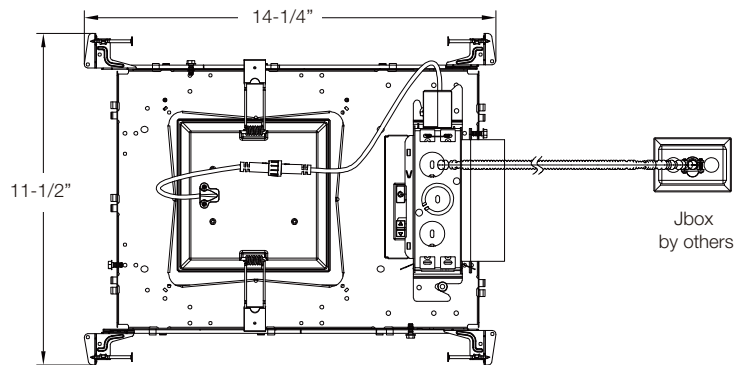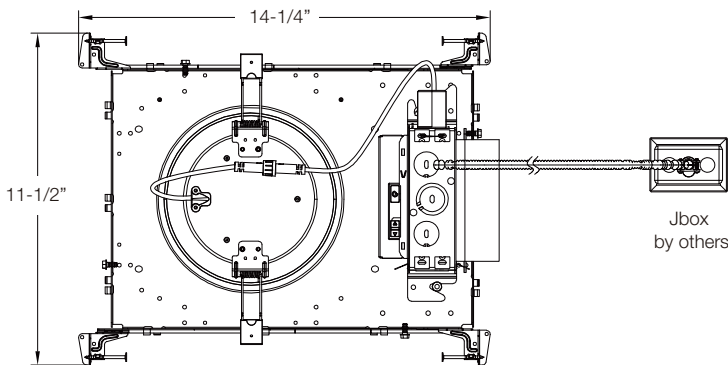






NYX SERIES

LINE DRAWINGS


With EM & IC BOX

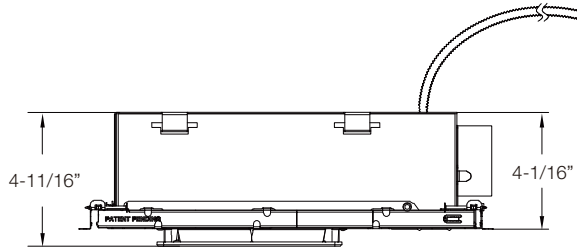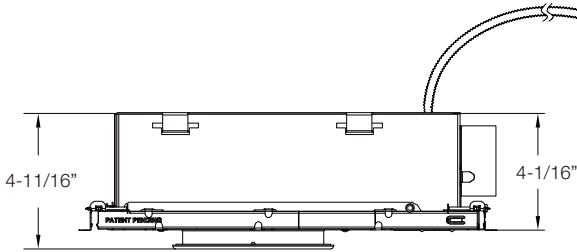



4" and 6" Round S Lumen Shallow IC Frame Cover with EM6 (shown with 6" Light Engine)

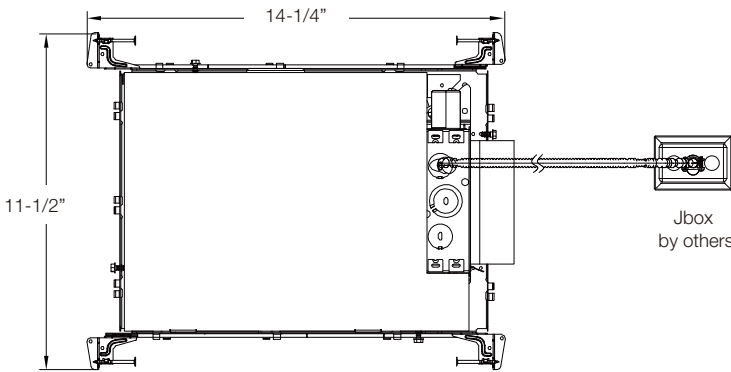

4" and 6" Square S Lumen Shallow IC Frame Cover with EM6 (shown with 6" Light Engine)

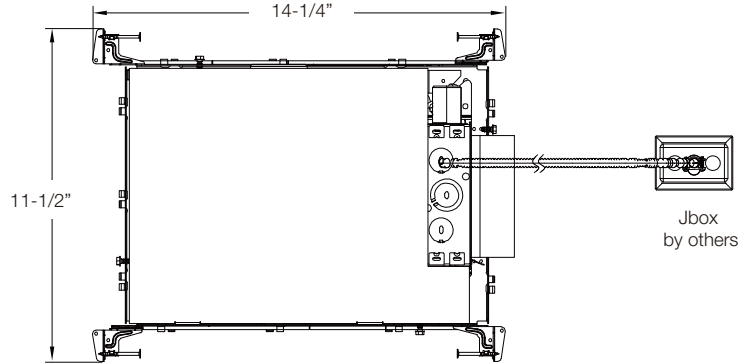









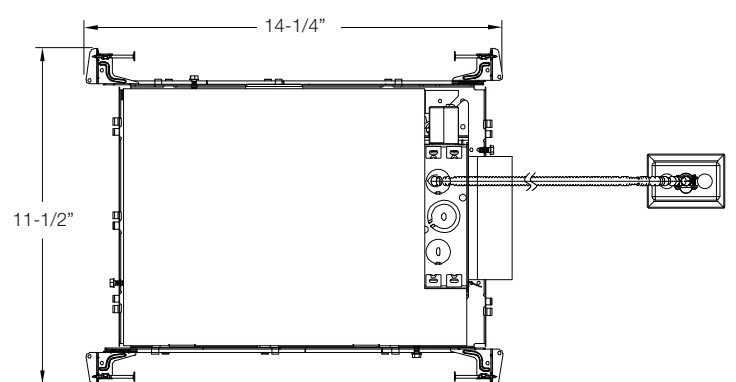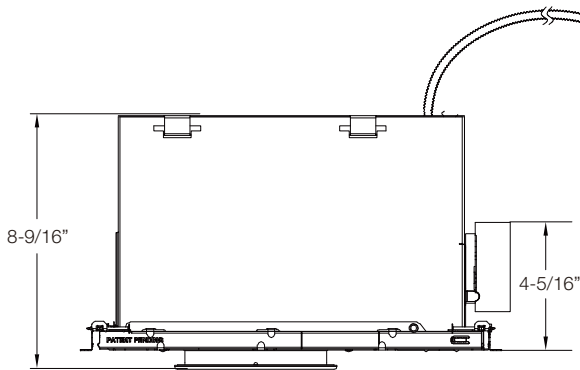With EM & IC BOX



6" Round M Lumen Large IC Frame Cover with EM6 (shown with 6" Light Engine)

NYX SERIES

ACCESSORY ORDERING INFORMATION				
Product	Model	Description	Pictures	Dimensions
35126	NCFBFB	Field Installable Butterfly Brackets (pair of 2) For New Construction Frame		
35125	NCFEMB	Field Installable Brackets For emergency Driver or Inverter with New Construction Frame		
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)		
FHUPS1-UNV-25L-SD	FHUPS1-UNV-25L-SD	25W Emergency Micro Inverter for field installation to use with 0-10V Driver options. 100-277VAC (up to 150W with use of 0-10V dimming). CEC Compliant		



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic) 4 pcs (frame)

Product	Model	Description
96677	NYXNC6RD/M9CCT5S/DUALDIM/MD/WBW	NYX New Construction 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
96678	NYXNC6RD/M9CCT5S/DUALDIM/MD/BBW	NYX New Construction 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
96679	NYXNC6RD/M9CCT5S/DUALDIM/WWW/CW	NYX New Construction 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
96680	NYXNC6RD/M9CCT5S/DUALDIM/WWW/CC	NYX New Construction 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
96681	NYXNC6RD/M9CCT5S/DUALDIM/WWW/WWW	NYX New Construction 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
96682	NYXICAT6RD/M9CCT5S/DUALDIM/WD/CW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
96683	NYXICAT6RD/M9CCT5S/DUALDIM/WD/CC	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
96684	NYXICAT6RD/M9CCT5S/DUALDIM/WD/WWW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
96685	NYXICAT6RD/M9CCT5S/DUALDIM/WD/WBW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
96686	NYXICAT6RD/M9CCT5S/DUALDIM/WD/BBW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
96687	NYXICAT6RD/M9CCT5S/DUALDIM/MD/CW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
96688	NYXICAT6RD/M9CCT5S/DUALDIM/MD/CC	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
96689	NYXICAT6RD/M9CCT5S/DUALDIM/MD/WWW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
96690	NYXICAT6RD/M9CCT5S/DUALDIM/MD/WBW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
96691	NYXICAT6RD/M9CCT5S/DUALDIM/MD/BBW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
96692	NYXICAT6RD/M9CCT5S/DUALDIM/WWW/CW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
96693	NYXICAT6RD/M9CCT5S/DUALDIM/WWW/CC	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
96694	NYXICAT6RD/M9CCT5S/DUALDIM/WWW/WWW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
96695	NYXNC4SQ/S9CCT5S/DUALDIM/WD/CW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
96696	NYXNC4SQ/S9CCT5S/DUALDIM/WD/CC	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
96697	NYXNC4SQ/S9CCT5S/DUALDIM/WD/WWW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
96698	NYXNC4SQ/S9CCT5S/DUALDIM/WD/WBW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
96699	NYXNC4SQ/S9CCT5S/DUALDIM/WD/BBW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
96700	NYXNC4SQ/S9CCT5S/DUALDIM/MD/CW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
96701	NYXNC4SQ/S9CCT5S/DUALDIM/MD/CC	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
96702	NYXNC4SQ/S9CCT5S/DUALDIM/MD/WWW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
96703	NYXNC4SQ/S9CCT5S/DUALDIM/MD/WBW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
96704	NYXNC4SQ/S9CCT5S/DUALDIM/MD/BBW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
96705	NYXNC4SQ/S9CCT5S/DUALDIM/WWW/CW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
96706	NYXNC4SQ/S9CCT5S/DUALDIM/WWW/CC	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
96707	NYXNC4SQ/S9CCT5S/DUALDIM/WWW/WWW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
96708	NYXNC6SQ/S9CCT5S/DUALDIM/WD/CW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
96709	NYXNC6SQ/S9CCT5S/DUALDIM/WD/CC	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
96710	NYXNC6SQ/S9CCT5S/DUALDIM/WD/WWW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic) 4 pcs (frame)

Product	Model	Description
96711	NYXNC6SQ/S9CCT5S/DUALDIM/WD/WBW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
96712	NYXNC6SQ/S9CCT5S/DUALDIM/WD/BBW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
96713	NYXNC6SQ/S9CCT5S/DUALDIM/MD/CW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
96714	NYXNC6SQ/S9CCT5S/DUALDIM/MD/CC	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
96715	NYXNC6SQ/S9CCT5S/DUALDIM/MD/WWW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
96716	NYXNC6SQ/S9CCT5S/DUALDIM/MD/WBW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
96717	NYXNC6SQ/S9CCT5S/DUALDIM/MD/BBW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
96718	NYXNC6SQ/S9CCT5S/DUALDIM/WWW/CW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
96719	NYXNC6SQ/S9CCT5S/DUALDIM/WWW/CC	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
96720	NYXNC6SQ/S9CCT5S/DUALDIM/WWW/WWW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic)

37494	NYXDM4RD/S9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37495	NYXDM4RD/S9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37496	NYXDM4RD/S9CCT5S/DUALDIM/WD/WWW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37497	NYXDM4RD/S9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37498	NYXDM4RD/S9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37499	NYXDM4RD/S9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37500	NYXDM4RD/S9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37501	NYXDM4RD/S9CCT5S/DUALDIM/MD/WWW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37502	NYXDM4RD/S9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37503	NYXDM4RD/S9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37504	NYXDM4RD/S9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37505	NYXDM4RD/S9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37506	NYXDM4RD/S9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37507	NYXDM6RD/S9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37508	NYXDM6RD/S9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37509	NYXDM6RD/S9CCT5S/DUALDIM/WD/WWW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37510	NYXDM6RD/S9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37511	NYXDM6RD/S9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37512	NYXDM6RD/S9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37513	NYXDM6RD/S9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37514	NYXDM6RD/S9CCT5S/DUALDIM/MD/WWW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37515	NYXDM6RD/S9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37516	NYXDM6RD/S9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic)

Product	Model	Description
37517	NYXDM6RD/S9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37518	NYXDM6RD/S9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37519	NYXDM6RD/S9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37520	NYXDM6RD/M9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37521	NYXDM6RD/M9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37522	NYXDM6RD/M9CCT5S/DUALDIM/WD/WWW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37523	NYXDM6RD/M9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37524	NYXDM6RD/M9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37525	NYXDM6RD/M9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37526	NYXDM6RD/M9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37527	NYXDM6RD/M9CCT5S/DUALDIM/MD/WWW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37528	NYXDM6RD/M9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37529	NYXDM6RD/M9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37530	NYXDM6RD/M9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37531	NYXDM6RD/M9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37532	NYXDM6RD/M9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37533	NYXDM4SQ/S9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37534	NYXDM4SQ/S9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37535	NYXDM4SQ/S9CCT5S/DUALDIM/WD/WWW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37536	NYXDM4SQ/S9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37537	NYXDM4SQ/S9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37538	NYXDM4SQ/S9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37539	NYXDM4SQ/S9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37540	NYXDM4SQ/S9CCT5S/DUALDIM/MD/WWW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37541	NYXDM4SQ/S9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37542	NYXDM4SQ/S9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37543	NYXDM4SQ/S9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37544	NYXDM4SQ/S9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37545	NYXDM4SQ/S9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37546	NYXDM6SQ/S9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37547	NYXDM6SQ/S9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37548	NYXDM6SQ/S9CCT5S/DUALDIM/WD/WWW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37549	NYXDM6SQ/S9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37550	NYXDM6SQ/S9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic)

Product	Model	Description
37551	NYXDM6SQ/S9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37552	NYXDM6SQ/S9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37553	NYXDM6SQ/S9CCT5S/DUALDIM/MD/WWW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37554	NYXDM6SQ/S9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37555	NYXDM6SQ/S9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37556	NYXDM6SQ/S9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37557	NYXDM6SQ/S9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37558	NYXDM6SQ/S9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.