

ATF8010



10W Focus[™] Beam Spread Adjustable LED Track Head Track Lighting

Description

The ATF8010 is a 10W high powered, LED track fixture with an adjustable beam spread dial specially designed for task and accent lighting. Available black, silver and white finishes.

Features

Body

Constructed of die-cast aluminum, the body housing features an aesthetically pleasing smooth conical shape with fin-shaped heat sink with clean lines and optimal thermal dissipation.

Beam Spread

The fixture includes an adjustable dial to control beam spread, from 18° to 50°. Dial includes a groove to indicate medium beam spread.

Dimming

The track fixture is dimmable when used with TRIAC dimming controls (Consult factory for compatible dimmers).

Technical Drawings

Adjustability

Pivot mounts allow up to 90° tilt and 350° rotation to allow for maximum aiming adjustability.

LED Characteristics

High powered 10W Citizen® CLU700 LED array maintains uniform intensity with a typical luminous flux up to 550 lumens, with a typical CRI of 90. Available in 2700 K and 3500 K correlated color temperature.

LED Driver

This LED track fixture is powered by a Class 2 Advance driver with 120V, 5% Hz input.



Fixture is provided with A-Line connector which is compatible with Juno style track. For other connector configurations (Halo, Liteline), please contact your A-Line representative.

QuickShip In-Stock

In-Stock products ship within two business days of an order being released.*

Job Information


Project Name

Type


Location

Quantity Date

SPECIFICATION				
Application	Track			
Approved Location	Dry / Indoor			
Beam Angle	18°~50°			
CCT	2700 K / 3500 K			
Certification	cETLus			
Colour	BK / SL / WH			
CRI	90			
Dimming	Yes			
Dimming Tech	TRIAC			
LED Life Span	50,000 Hrs			
Lumen Maintenance	70% @ 50,000 Hrs			
Lumens	500 / 550			
Lumens per Watt	50 / 55			
Power Factor	>0.9			
Primary Voltage	120			
Rotation	350°			
THD	<20%			
Tilt	90°			
Warranty	5 Years			
Wattage	10			



Ordering Guide

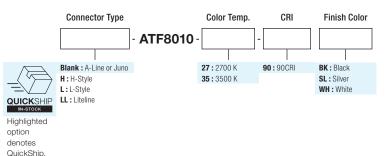

* QuickShip option is available on orders of 100 pieces or less. QuickShip lead time may vary for orders greater than 100 pieces. No additional shipment rates apply. Subject to availability. Notes: For additional options please consult your A-Line Lighting representative. Juno is a registered trademark of Juno Lighting Group. Halo is a registered trademark of Cooper Lighting. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Liteline Corporation Copyright © 2019 All rights reserved.


Telephone 416.996.1856 1.866.730.7704 Fax 905.709.5255 1.888.738.9736



Photometry

ATF8010-27-90 : FOCUS™ LED TRACK HEAD, 10W, 2700 K, 90CRI, @ 26° BEAM SPREAD

Zonal Lumen Summary					
Zone	Lumens	% Luminaire			
0-30	513.2	84.8%			
0-40	571.9	94.5%			
0-60	597.3	98.7%			
60-90	7.7	1.3%			
70-100	3.6	0.6%			
90-120	0	0%			
0-90	605.0	100%			
90-180	0	0%			
0-180	605.0	100%			



Center Beam FC			at a Distance Beam Width	<u> </u>	
4.0ft	122 fc		1.9ft 1.	Əft	
8.0ft	30.4 fc		3.8ft 3.	Bft	
12.0ft	13.5 fc		5.7ft 5.	Sft	
16.0ft	7.60 fc		7.5ft 7.	5ft	
20.0ft	4.86 fc		9.4ft 9.	4ft	
24.0ft	3.38 fc		11.3ft 11.	3ft	
Vert. Spread: 26.5° Horiz. Spread: 26.5°					