

Round Instant Flexilight




The Round Instant Flexilight, 1/2" in diameter and rated at 35,000 hours, is a basic, long-lasting product. Since we only use the highest-quality PVC material along with UV additives, the Round Instant Flexilight can be used in indoor or outdoor applications and can withstand both freezing and scorching weather. Flashing light effects can be created if a controller is used.

The Round Instant Flexilight is very easy to use for a wide variety of design purposes, such as creating meaningful patterns in lighting projects; illuminating the edges of buildings, stairs, and other objects; or simply making a promotional sign.

Number of wire	2
Number of bulb/foot	12
Diameter	1/2"
Shape	Round
Colors available (PVC)	Clear:
	Clear, Green
	Fluorescent Colors:
	Green and Pink
	Pearl Colors:
	White, Red, Yellow, Blue & Green

FLEXIBLE ROPELIGHT

Specifications of Round Instant Flexilight:

Structure	Voltage	Max. Loading Length (Color)	Cutting Unit (Color)	Bulb Spec.	Number of Bulbs/Unit	Wattage
	12V	30'	4'	3.0V 0.07A 0.21W	12	2.52W/foot
	24V	60'	8'	3.0V 0.07A 0.21W	12	2.52W/foot
	110-120V	240'	24'	6.5V 0.07A 0.46W	12	3W/foot

Packages Available

Item Number	Length	Package
ERIF-120-150	150'	/Roll
ERIF-24-150*	150'	/Roll
ERIF-12-150**	150'	/Roll

ERIF - 120 - 150 - COLOR


Item No. Voltage Length Specify color

(Available in 150' Rolls only, no custom cut)

NOTE: EACH ROLL INCLUDES; 3pcs ERIFXXX Power Cords, 3pcs F3 Splice Connectors, 3pcs F4 End Caps

Round Instant Flexilight Accessories:

- ERIF1-120V Round Instant Flexilight 6ft. Power Cord w/ Power Connector
- ERIF1-24V* Round Instant Flexilight 6ft. Power Cord w/ Power Connector
- ERIF1-12V** Round Instant Flexilight 6ft. Power Cord w/ Power Connector
- F3 Round Instant Flexilight Splice Connector
- F4 Round Instant Flexilight End Caps
- F5 Round Instant Flexilight Tie Strap
- F6 Round Instant Flexilight Mounting Clips
- F7 Round Instant Flexilight Suction Cup
- F8 Round Instant Flexilight 6ft. Channel
- F9 Round Instant Flexilight Easy Splice Connector
- F10 Round Instant Flexilight Y-cord
- F11 Round Instant Flexilight T-connector
- F14 Round Instant Flexilight Splice Connector
- F103 Round Instant Flexilight PVC Connector
- F22 Round Instant Flexilight PVC T-Connector
- F23 Round Instant Flexilight PVC X-Connector

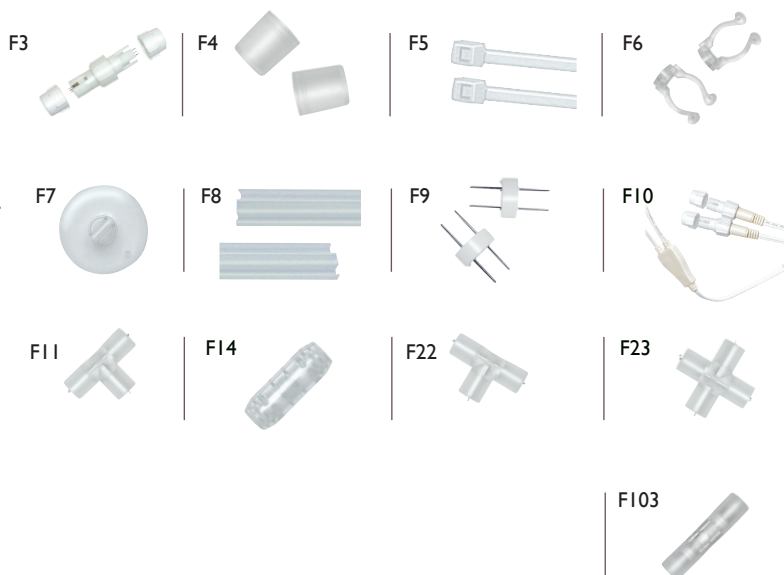

Standard Controller

MODEL	VOLTAGE AVAILABLE	MAX. LENGTH	FUNCTIONS
ERWL-2C-110	120V	150 FT.	Static/Flashing
ERWL-2C-24A*	24V	60 FT.	Static/Flashing
ERWL-2C-12A**	12V	30 FT.	Static/Flashing

(*Requires 24V AC power source)

(**Requires 12V AC power source)



FLEXIBLE ROPELIGHT