



The GNL is a versatile enclosed surface luminaire ideal for walkways, parking structures, common areas or any area vandal resistant luminaires are required

GNL Guardian round enclosed surface

Features and Specifications:

Construction:

- Front trim and back housing are available in 2 standard color choices
- Finish of the guard is molded throughout
- Designed for long-term installations
- Die cast marine grade aluminum housing
- One piece injection molded guard with integral weep hole made from UV-stabilized polycarbonate
- Tamper-proof TORX™ T-15 pin-in-head stainless steel screws and nylon capture washers provided
- Diffuser is one piece 0.125" thick injection molded lens with radial prisms and molded from UV-stabilized polycarbonate in a frost or translucent white option

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Shallow units are ADA compliant

Mounting Options:

- Surface mount on ceiling or wall

Board:

- Universal voltage 120-277V standard
- 0-10V dimming (to 10%) std.

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart, dimensions & accessories

Ordering Guide / Example		GNLWATWSOG				
GNL		A				
Series	Color			Lens Options	Housing Depth	Faceplate Options
GNL = Guardian round luminaire	W = White Z = Bronze	Adjustable CCT and Output	Field adjustable CCT 3000k-5000k Field adjustable output 2100-3200 Lm 13.5W-20.5W	FR = Frosted ribbed TW = Translucent white	S = Shallow D = Deep	CG = Cross guard EG = Eyelid guard OG = Open guard
				EM = Emergency pack >90 min., >500 lumens (Deep housing only - Special order Min. Qty's) HF = High frequency occupancy sensor (on/off) HFAS = High frequency occupancy sensor adjustable standby 10, 20, 30 or 50%		

Consult factory for additional options not shown or listed

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Accessories (order separately)

TORX = Tamper-proof TORX™ T-15 pin-in-head screwdriver

Project Information:

Job Name:	Fixture Type:
Catalog #:	Date:
Comments:	


Certification & Listings:




BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions & Accessories


Open Guard

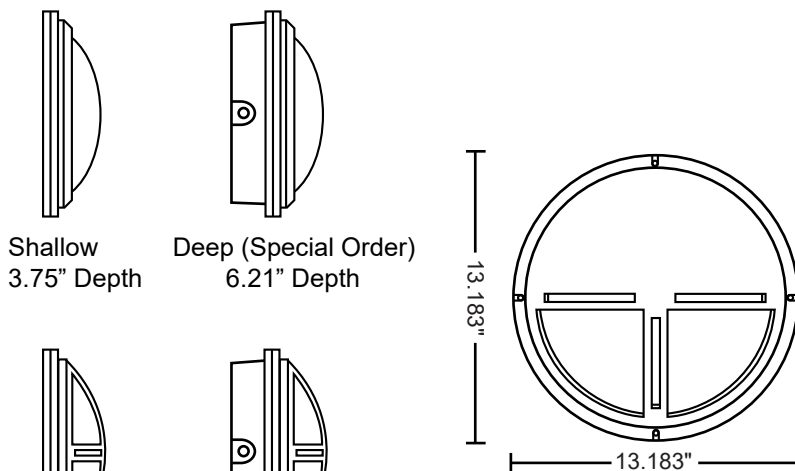


Cross and Eyelid Guard

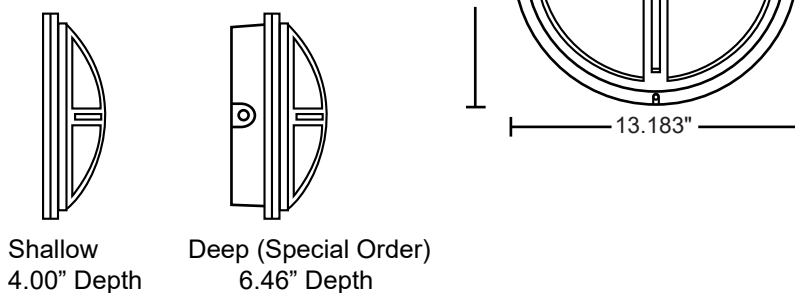

Exterior Finishes

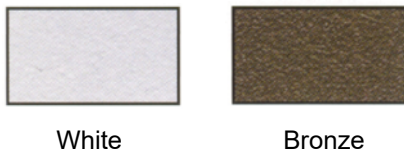

Lens Options

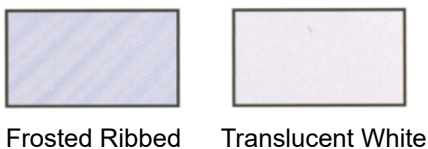

Lumen Chart - 4000K

Power	Frosted Ribbed	Translucent White
13.5W	1380Lu	832Lu
17W	1730Lu	1050Lu
20.5W	2182Lu	1241Lu

When used in draft prone areas, fixtures with high frequency sensors should be rigidly mounted
 High frequency motion sensors can detect motion through many materials including glass, sheet rock walls, wood doors and the lens of a fixture, enabling the sensor to be hidden from view in most cases - consult factory to see if an HF sensor is the right fit for your application
 LAMAR LED assumes no responsibility for misapplication of fixtures

Due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 0721