

# HALFMOON

## Interior ADA Sconce



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs are field serviceable.

**LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request. Integral driver.


**Body:** Spun .050 aluminum or 18ga steel.

**Acrylic:** Seamless acrylic is UL-94 HB Flame Class rated.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Modifications:** Consult factory for lamping options.

**Surge Protection:** External surge protector provided as standard.

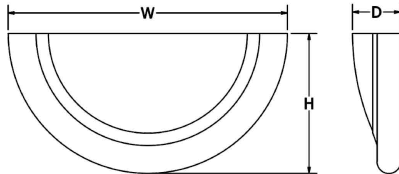

SAMPLE CATALOG NUMBER: GL-4161-				
L15-		W-		A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)
<b>GL-4161</b> W in 22 7/8" mm 580 H in 11 3/8" mm 290 7 lbs 3.2kg D in 4" mm 100	<b>L10.</b> 1LED30 <b>L15.</b> 1LED35 <b>L14.</b> 1LED40	<b>Standard:</b> <b>W.</b> White Opal  <b>Optional:</b> <b>S.</b> Satin White <b>F.</b> Faux Alabaster <b>M.</b> Earth Marble  Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze  <b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBN-</b> Terra Brown <b>TBZ-</b> Textured Bronze  <b>Premium:</b> <b>SA-</b> Satin Aluminum <b>SB-</b> Satin Brass <b>PB-</b> Polished Brass <b>AB-</b> Antique Brass <b>ORB-</b> Oil Rubbed Bronze <b>SC-</b> Satin Chrome <b>SN-</b> Satin Nickel <b>PC-</b> Polished Copper <b>SA-</b> Satin Aluminum	<b>A.</b> No Options <b>EL.</b> Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. <b>L.</b> Perforated Top Lens Painted white perforated metal top lens. <b>TL.</b> Acrylic Top Lens White acrylic top lens.

All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	Rated CRI	Rated Life Hrs	Board Lumens	Kelvin
L10	14	+80	50000	1895	3000
L15	14	+80	50000	1895	3500
L14	14	+80	50000	1895	4000

Universal Voltage unless otherwise specified.