

POMPEY

Indoor ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Body: Formed .050 aluminum body with 1/4" x 1/2" aluminum rails and 1/2"sq decorative bars.



Acrylic: Cylinder is UL-94 HB Flame Class rated. Top and bottom lens standard.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

LED Dimming: 1% 0-10V dimming standard with LED lamping option.

Modified: Contact factory for modified lengths, lamping and decorative fronts.

Surge Protection: External surge protector provided as standard.

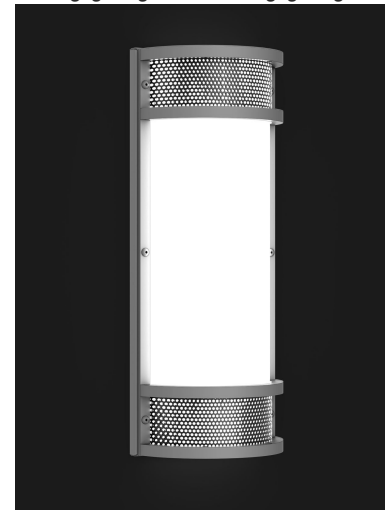

SAMPLE CATALOG NUMBER: GL-4420-		G-	W-	PA-	BLK-	A
MODEL NO.		LAMPING	ACRYLIC	FINISH		OPTION(S)
GL-4420	W in 7 1/4" mm 185	F. 13LED30	Standard:	Standard:		A. No Options
	H in 18" mm 460	G. 13LED35	W. White Opal	Powder Coat		B. Damp Location
5lbs	D in 4" mm 100	H. 13LED40	Optional:	BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze		EL. Emergency LED Consult factory. Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F.
2.3kg			S. Satin White F. Faux Alabaster M. Earth Marble	Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze		
			Acrylic is UL-94 HB Flame Class rated.	Premium: SA-Satin Aluminum		
				Perforated front available in painted finish or brushed aluminum. Designated by second finish code.		

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Board Lumens	Board Kelvin
13LED30	13W	80	50000	1895	3000
13LED35	13W	80	50000	1895	3500
13LED40	13W	80	50000	1895	4000

Universal Voltage unless otherwise specified.