



# KLICK Kit

6' Surface-mount KLICK Track with 5 adjustable spotlights and 4 double spots, 4550 Lumens, 3500 K

Track Lighting

## Description

The KLICK Kit series is a complete track system lighting solution with fixtures included. With everything in one package, easily provide beautiful lighting with ease.

## Features

### Track

A 72" 3-part monocoque sandwich construction made from interlocking extruded aluminum channels. End caps and a live end 15' power feed complete this streamlined track.

KLICK track with 30° beam spread. 5 Watt per fixture provides up to 450 lumens and a typical CRI of 90 at 3500 K correlated color temperature. Secure-click locking technology for simple and convenient installation and maintenance.

- 5 × KLICK Adjustable Spotlight fixtures
- 4 × KLICK Double Spot fixtures
- 96 Watt driver

### Fixtures

**SPOT:** Compact adjustable LED track fixture. Aesthetically pleasing smooth cylindrical shape with 20° beam spread. 10 Watt per fixture provides up to 550 lumens and a typical CRI of 92 at 3500 K correlated color temperature. Secure-click locking technology for simple and convenient installation and maintenance.

**DOUBLE SPOT:** Compact 2-light LED track fixture. Encapsulates within the

### Electrical

Remote mounted 96 Watt dimmable electronic LED hardwire box with 24V 4A output. Open and short circuit protection. Auto-reset functionality automatically reset once the condition is resolved.

### Kit Includes

This KLICK track system kit includes:  
• 6' Single channel linear track system

## Job Information


Project Name	
Type	
Location	
Quantity	
Date	



## SPECIFICATION

Approved Location	Dry / Indoor
Application	Surface
Certification	cETLus
Dimming Tech.	TRIAC / ELV
Input	120V
Lumen Output	4550
Max. Op. Temp.	40°C (104°F)
Min. Start Temp.	-10°C (14°F)
Primary Voltage	24V DC
Warranty	3 Years

## Technical Drawings

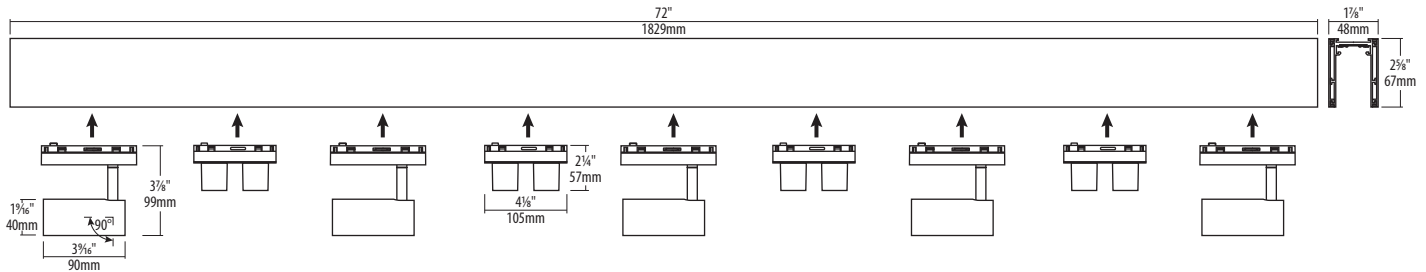

## Ordering Guide



### KL-KT6F35-1005-BK

6' Surface-mount KLICK track with 5 adjustable spotlights and 4 double spots, 3500 K.

### Notes:

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Liteline Corporation  
Copyright © 2021  
All rights reserved.

Telephone  
416.996.1856  
1.866.730.7704

Fax  
905.709.5255  
1.888.738.9736

LITELINE.COM

REV 6.16.21