



VERTEX™ 1000 (OUTDOOR)

VT-SERIES | RUBBER COATED | LINEAR LED LIGHTING


Fixture Type: _____

Project: _____


Location: _____



Cut Intervals: 2.438" (62.5mm)



Width: 0.563" (15mm)
(0.688" [17mm] end cap)



Depth: 0.25" (6mm)
(0.375" [9mm] end cap)

MODEL:	VT27K-WR-24V	VT3K-WR-24V	VT35K-WR-24V	VT40K-WR-24V	VT5K-WR-24V
Kelvin	2700K	3000K	3500K	4000K	5000K
Lumens	966 lm/ft	1000 lm/ft	1020 lm/ft	1041 lm/ft	1065 lm/ft
Rating	IP67	IP67	IP67	IP67	IP67


PRODUCT FEATURES

- 1000 lumens per foot
- Dimmable
- 50,000 hour life
- 5-year warranty
- UL-listed for indoor and outdoor use
- 3M™ Industrial adhesive backing
- For use with 24V power supplies

SPECIFICATIONS

Series	VT - Vertex™ 1000 (Outdoor)
Input Voltage	24VDC / Constant Current
Watts per Foot	6.7W/ft @ Maximum Run Length
Beam Spread	120°
Max Run Length	Unlimited, power every 14ft
Production Intervals	2.438" (62.5mm)
End Cap Dimensions	0.688" (17mm) x 0.375" (9mm)
Tape Dimensions	0.563" (15mm) x 0.25" (6mm)
CRI	85+
Diode	5630
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)

KELVIN COLOR TEMPERATURE SCALE

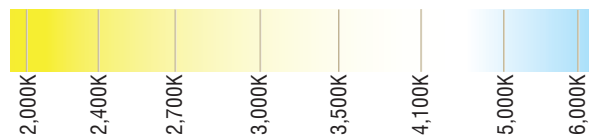

TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft
6.7	13.4	20.1	26.8	33.4	40.1	46.8	53.5	60.2	66.9	73.5	80.3	86.9	93.6

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.0

