

Linear

TiMi Glow 007 Fixture Guide

KKDÖ

Indoor | Surface | Low output up to 480lm/m (146lm/ft)




Key applications

- ✓ Architectural detail
- ✓ Cabinet/Furniture
- ✓ Cove lighting
- ✓ Display case
- ✓ Interior
- ✓ Mirror back lighting
- ✓ Orientation lighting
- ✓ Shelving display
- ✓ Under bench
- ✓ Under cabinet
- ✓ Wardrobe

Key features

- ✓ Custom lengths
- ✓ Diffusion: Homogenous
- ✓ Direct view
- ✓ Extensive CCT range
- ✓ Form factor: Micro
- ✓ IP40
- ✓ Output low



MOUNTING METHODS




KKCP-22 Lock Clip



3M tape mounting



Dual cable exit design



TiMi Glow 007

Specification sheet



Dimension	H10/W9/L91.4-2008mm (H0.39/W0.35/L3.60-79.06in)	
PCB increment	41.7mm increment/2000mm max (1.64in increment/79in max)	
LED pitch	6.95mm (0.27in)	
Chip	s/e-line	Toyoda Gosei
	k-line	Toyoda Gosei or Equivalent
Beam angle	110° (Diffused Cover)	
Colours	s/e-line	1900K/2100K/2300K/2500K/2700K/3000K/3500K/4000K/5000K
	k-line	1900K/2100K/2300K/2500K/2700K/3000K/3500K/4000K/5000K
Bin/Step	s-line	2-step MacAdam ellipse
	e/k-line	3-step MacAdam ellipse
CRI	≥ 90	
Lifetime	50,000 hours @ 25°C (50,000 hours @ 77°F)	
Operating temp	T _a = -25 to 40°C (T _C max = 78.6°C) T _a = -13 to 122°F (T _C max = 160.2 °F)	
IP rating	IP40	
Finish	Silver anodised	
Cover/lens	Diffused	
Mounting	Surface mounting via 3M tape	
Power feed	Hardwire tails or male/female connectors	
Control	0-10V/1-10V/DMX/DALI	



LED Grading Key

Exclusive Grade

s s-line*	*KKDC tuned CCT range
2-step CCT range	
e e-line*	
3-step CCT range	

Base Grade

k k-line	
3-step commercial range Energy Star CCTs	

PERFORMANCE DATA @ 3000K



Power consumption	Supply voltage	Supply current
10.9W/m (3.32W/ft)	24V DC	0.45A/m (0.14A/ft)

Colour Rendering Index (CRI)

	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
k-line	94	97	98	93	93	96	92	83	60	93	94	82	95	99

Diffused Cover

		CRI	R9	Rf	Rg
s/e-line	-	-	-	-	-
k-line	480lm/m (146lm/ft) 45lm/W	92	60	90	100

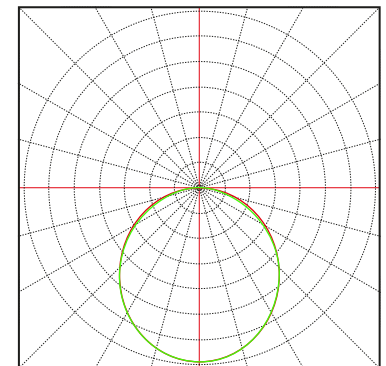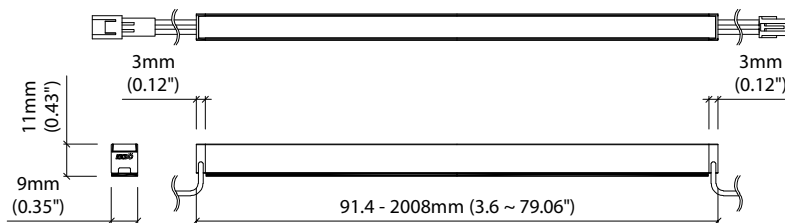

Data derived from independent UKAS/IESNA LM-79-08 accredited testing of production samples.

Linear

TiMi Glow 007

Code Table



FIXTURE

Model	Finish	Cover ¹	Grade ²	LED	Colour (CCT)	Length Availability ³	IP	Cable Length	Power Feed ⁴	Input									
TiMi Glow	TG	Silver Anodised	SA	Diffused	C		007	1900K	19	m	91.4-2008mm 41.7mm increments	IP40	40	50mm (1.97in)	0050	Single no sheath tail	S00X	DC 24V	g
								2100K	21					300mm (11.81in)	0300	Double no sheath tail	D00X		
								2300K	23					i	3.60-79.06in 1.64in increments	Single no sheath IP20 connector	S20X		
								2500K	25	Double no sheath IP20 connector	D20X								
								2700K	27							(Specify length code OR total run length)			
								3000K	30										
								3500K	35										
								4000K	40										
5000K	50																		

¹ Refer to **Cover/Lens Options** on **Options** pages ² Refer to **LED Grading /Key** on **Specification sheet** page ³ Refer to **Length Availability List** or enter total run length instead of length code

⁴ Refer to **Power Feed Options** on **Options** pages

Code Example:

TG	-	SA	-	C	-	k	-	007	-	35	-	m	-	508	-	40	-	0300	-	D20X	-	g
TiMi Glow		Silver Anodised		Diffused				007		3500K		508.4mm		IP40		300mm/11.81"		Double no sheath IP20 connector		DC 24V		

ACCESSORIES

Mounting Accessories

KKCP-22 Lock Clip (1no.)

* Refer to **Mounting accessories** on **Accessories** pages

Connection Accessories

KKCN-01 2 PIN male & female 50mm (1.97in) pair

KKCN-03 2 PIN male & female 300mm (11.81in) pair

KKCN-06 2 PIN 300mm (11.81in) extension lead

* Refer to **Power feed** on **Accessories** pages

PSU/Driver

0-10V/1-10V/DALI/DMX

* Refer to **Driver/PSU Options** page for details or provide requirement and KKDC to offer the suitable option

LED ENGINE VARIANTS (LED STRIP TYPE)

Colour	Output	LED	Lumen/m	Lumen/ft	W/m	W/ft	Spec Doc	Length	Increment
Single CCT	Low	007	480	146	10.9	3.32	TiMi Glow 007	91.4-2008mm (3.60-79.06in)	41.7mm (1.64in)
	Mid	010	700	213	10	3.05	TiMi Glow A010	85.0-2008mm (3.34-79.06in)	38.46mm (1.51in)
	Mid	008	860	262	20	6.09	TiMi Glow 008	91.4-2008mm (3.60-79.06in)	41.7mm (1.64in)
	High	020	1400	427	20	6.1	TiMi Glow A020	85.0-2008mm (3.34-79.06in)	38.46mm (1.51in)

* Performance data: A/k-line, diffused cover, 3000K

Linear

TiMi Glow 007

Length Availability List



Length Code		Fixture Length ¹		LED Strip ²		End Cap Dimension ³		Wattage (W)	Output (lm)	
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)	Range Data
m0091	i0004	91mm	3.60in	83mm	3.28in	6mm	0.24in	1.67	72	57-75
m0133	i0005	133mm	5.24in	125mm	4.92in	6mm	0.24in	2.50	107	86-112
m0175	i0007	175mm	6.88in	167mm	6.56in	6mm	0.24in	3.33	143	115-149
m0216	i0009	216mm	8.52in	208mm	8.20in	6mm	0.24in	4.17	179	143-186
m0258	i0010	258mm	10.16in	250mm	9.84in	6mm	0.24in	5.00	215	172-224
m0300	i0012	300mm	11.80in	292mm	11.48in	6mm	0.24in	5.83	251	201-261
m0341	i0013	341mm	13.44in	333mm	13.12in	6mm	0.24in	6.67	287	229-298
m0383	i0015	383mm	15.08in	375mm	14.76in	6mm	0.24in	7.50	322	258-335
m0425	i0017	425mm	16.72in	417mm	16.41in	6mm	0.24in	8.33	358	287-373
m0466	i0018	466mm	18.36in	458mm	18.05in	6mm	0.24in	9.17	394	315-410
m0508	i0020	508mm	20.00in	500mm	19.69in	6mm	0.24in	10.00	430	344-447
m0550	i0022	550mm	21.64in	542mm	21.33in	6mm	0.24in	10.83	466	373-484
m0591	i0023	591mm	23.28in	583mm	22.97in	6mm	0.24in	11.67	502	401-522
m0633	i0025	633mm	24.92in	625mm	24.61in	6mm	0.24in	12.50	537	430-559
m0675	i0027	675mm	26.56in	667mm	26.25in	6mm	0.24in	13.33	573	459-596
m0716	i0028	716mm	28.20in	708mm	27.89in	6mm	0.24in	14.17	609	487-634
m0758	i0030	758mm	29.84in	750mm	29.53in	6mm	0.24in	15.00	645	516-671
m0800	i0031	800mm	31.49in	792mm	31.17in	6mm	0.24in	15.83	681	545-708
m0841	i0033	841mm	33.13in	833mm	32.81in	6mm	0.24in	16.67	717	573-745
m0883	i0035	883mm	34.77in	875mm	34.45in	6mm	0.24in	17.50	752	602-783
m0925	i0036	925mm	36.41in	917mm	36.09in	6mm	0.24in	18.33	788	631-820
m0966	i0038	966mm	38.05in	958mm	37.73in	6mm	0.24in	19.17	824	659-857
m1008	i0040	1008mm	39.69in	1000mm	39.37in	6mm	0.24in	20.00	860	688-894
m1050	i0041	1050mm	41.33in	1042mm	41.01in	6mm	0.24in	20.83	896	717-932
m1091	i0043	1091mm	42.97in	1083mm	42.65in	6mm	0.24in	21.67	932	745-969
m1133	i0045	1133mm	44.61in	1125mm	44.29in	6mm	0.24in	22.50	967	774-1006
m1175	i0046	1175mm	46.25in	1167mm	45.94in	6mm	0.24in	23.33	1003	803-1043
m1216	i0048	1216mm	47.89in	1208mm	47.58in	6mm	0.24in	24.17	1039	831-1081
m1258	i0050	1258mm	49.53in	1250mm	49.22in	6mm	0.24in	24.90	1071	857-1114
m1300	i0051	1300mm	51.17in	1292mm	50.86in	6mm	0.24in	25.83	1111	889-1155
m1341	i0053	1341mm	52.81in	1333mm	52.50in	6mm	0.24in	26.67	1147	917-1193
m1383	i0054	1383mm	54.45in	1375mm	54.14in	6mm	0.24in	27.50	1182	946-1230
m1425	i0056	1425mm	56.09in	1417mm	55.78in	6mm	0.24in	28.33	1218	975-1267
m1466	i0058	1466mm	57.73in	1458mm	57.42in	6mm	0.24in	29.17	1254	1003-1304
m1508	i0059	1508mm	59.37in	1500mm	59.06in	6mm	0.24in	30.00	1290	1032-1342
m1550	i0061	1550mm	61.02in	1542mm	60.70in	6mm	0.24in	30.83	1326	1061-1379
m1591	i0063	1591mm	62.66in	1583mm	62.34in	6mm	0.24in	31.67	1362	1089-1416
m1633	i0064	1633mm	64.30in	1625mm	63.98in	6mm	0.24in	32.50	1397	1118-1453
m1675	i0066	1675mm	65.94in	1667mm	65.62in	6mm	0.24in	33.33	1433	1147-1491
m1716	i0068	1716mm	67.58in	1708mm	67.26in	6mm	0.24in	34.17	1469	1175-1528
m1758	i0069	1758mm	69.22in	1750mm	68.90in	6mm	0.24in	35.00	1505	1204-1565
m1800	i0071	1800mm	70.86in	1792mm	70.54in	6mm	0.24in	35.83	1541	1233-1602
m1841	i0072	1841mm	72.50in	1833mm	72.18in	6mm	0.24in	36.67	1577	1261-1640

TiMi Glow 007

Length Availability List




Length Code		Fixture Length ¹		LED Strip ²		End Cap Dimension ³		Wattage (W)	Output (lm)	
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)	Range Data
m1883	i0074	1883mm	74.14in	1875mm	73.82in	6mm	0.24in	37.50	1612	1290-1677
m1925	i0076	1925mm	75.78in	1917mm	75.47in	6mm	0.24in	38.33	1648	1319-1714
m1966	i0077	1966mm	77.42in	1958mm	77.11in	6mm	0.24in	39.17	1684	1347-1752
m2008	i0079	2008mm	79.06in	2000mm	78.75in	6mm	0.24in	40.00	1720	1376-1789

¹ Actual total overall length of light fixture (LED strip + end caps + void/wire hole)

² Actual length of PCB strip

³ Actual length of 2x end caps

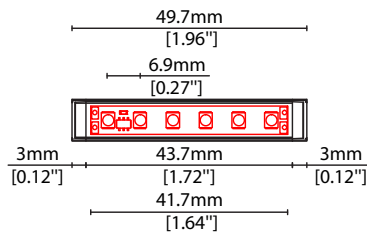





TiMi Glow 007

Options



COVER/LENS OPTIONS

* Options are an integral part of the fixture ordering codes. Please refer to **Code Table** pages.




C Diffused cover
W9/H10mm (W0.35/H0.39")


POWER FEED OPTIONS

* Options are an integral part of the fixture ordering codes. Please refer to **Code Table** pages.


0050 S20X 50mm (1.97") Single no sheath IP20 connector




0050 D20X 50mm (1.97") Double no sheath IP20 connector




0300 S00X 300mm (11.81") Single no sheath tail




0300 D00X 300mm (11.81") Double no sheath tail




0300 S20X 300mm (11.81") Single no sheath IP20 connector





0300 D20X 300mm (11.81") Double no sheath IP20 connector



2 Pin Female Connector

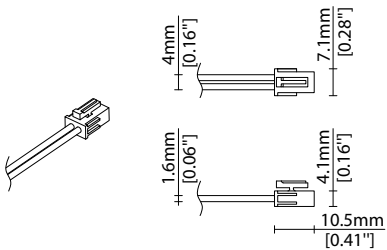

2 Pin Male Connector

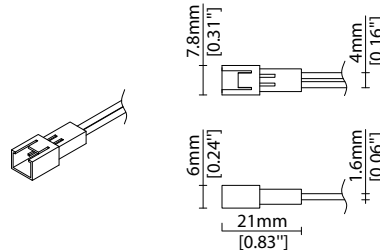


Key

Control Gear Power supply, sub-controllers & control systems

JB Junction box / cable connection

MOUNTING ACCESSORIES

Note: Accessories are to be ordered separately with corresponding code shown below.





KKCP-22 (1no.)

Lock Clip (allow 3 per metre/40in)
S/Steel finish

L25/W11/H17.4mm
(L0.98/W0.43/H0.68")


POWER FEED



KKCN-01 50mm (1.97in) pair

KKCN-03 300mm (11.81in) pair

2 PIN male + female connector set



KKCN-06

2 PIN 300mm (11.81in) extension
lead

KKDC CONTROL



IP20
Plastic housing
L170/W59/H29mm
(L6.69/W2.32/H1.14in)

KKDM-06 1-10V

visDIM dimmable sub-controller
(4 x 8A max @ 12-36V)



IP20
Plastic housing
L170/W53.4/H28mm
(L6.69/W2.10/H1.10in)

KKSC-05 DMX

visDIM dimmable sub-controller
(4 x 5A max @ 12-36V)

Linear

TiMi Glow 007 Accessories

KKDÖ

KKDC CONTROL (CONTINUED)



IP20
Plastic housing
L170/W59/H29mm
(L6.69/W2.32/H1.14in)

KKDL-02 DALI

visDIM dimmable sub-controller
(4 x 8A max @ 12-36V)



IP20
Plastic housing
L166/W53.4/H23mm
(L6.54/W2.10/H0.91in)

KKDL-03 DALI

visDIM dimmable sub-controller
(4 x 5A max @ 12-36V)

AVAILABLE PSU OPTIONS

Control Mode	PSU (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating
Switched	CEN-60-24	90-295V	24V	2.5A	60W	-	IP67
	HLG-60H-24	90-305V	24V	2.5A	60W	-	IP67
	HLG-100H-24	90-305V	24V	4.0A	100W	-	IP67
	HLG-150H-24	90-305V	24V	6.3A	150W	-	IP67
	HLG-240H-24	90-305V	24V	10A	240W	-	IP67
0-10V (1-10V)	PWM-40-24	90-305V	24V	1.67A	40W	100-0.15 (100-10)	IP67
	PWM-60-24	90-305V	24V	2.5A	60W	100-0.15 (100-10)	IP67
	PWM-90-24	90-305V	24V	3.67A	90W	100-0.15 (100-10)	IP67
	PWM-120-24	90-305V	24V	5.0A	120W	100-0.15 (100-10)	IP67
DALI	LIN100A1	120-277V	24V	1A per channel	100W	100-0.1	IP66/IP40
DMX RGB	LIN100A1	120-277V	24V	1.33A per channel	100W	100-0.1	IP66/IP40
DMX RGBW	LIN100A1	120-277A	24V	1A per channel	100W	100-0.1	IP66/IP40

Flicker Free Options - Combination of PSU+ sub-controller

Control Mode	PSU (Order Code)	Sub-controller (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating PSU/ Sub-controller
0-10V or 1-10V	CEN-60-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKDM-06	90-295V	24V	4.0A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKDM-06	90-295V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKDM-06	90-295V	24V	10.0A	240W	100-0.9	IP67/IP20
DALI	CEN-60-24	KKDL-02/03	90-295V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-60H-24	KKDL-02/03	90-305V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-100H-24	KKDL-02/03	90-305V	24V	4.0A	100W	100-0.1	IP67/IP20
	HLG-150H-24	KKDL-02/03	90-305V	24V	6.3A	150W	100-0.1	IP67/IP20
	HLG-240H-24	KKDL-02/03	90-305V	24V	10.0A	240W	100-0.1	IP67/IP20
DMX RGB	CEN-60-24	KKSC-05	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKSC-05	90-305V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKSC-05	90-305V	24V	4A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKSC-05	90-305V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKSC-05	90-305V	24V	10.0A	240W	100-0.9	IP67/IP20

¹ The items shown above cover the most frequently used specification but does not exhaust the possible options

² PSU and/or driver can be chosen from the table, or KKDC may recommend the best option upon receipt of the controls requirement and installation environment

³ Electrical shop drawing will include detailed information of PSU and relevant control drivers

⁴ Cut sheets are available on the controls section of www.kkdc.lighting or upon request