

JOB NAME \_\_\_\_\_

CONTACT \_\_\_\_\_

ORDERING CODE \_\_\_\_\_

**ORDERING CODE** ADA LM-79

<b>PART NUMBER</b>	<b>103055</b>	LED
<b>FINISH</b>	<b>AL/WH</b> <b>BK/G</b> <b>WH/WH</b>	brushed chromed outer / white inner black outer / gold inner white outer / white inner
<b>CCT</b>	<b>30K</b>	3000K
<b>CRI</b>	<b>90</b>	90 CRI
<b>DIMMING</b>	<b>DIM</b>	Trailing Edge (ELV) dimming


**ECLIPSE 2** **Direct/Indirect**  
**Wall**



AL/WH                      BK/G                      WH/WH

ORDERING CODE \_\_\_\_\_

Follow the steps to specify your fixture, example:  
**103055 - BK/G - 30K - 90 - DIM**

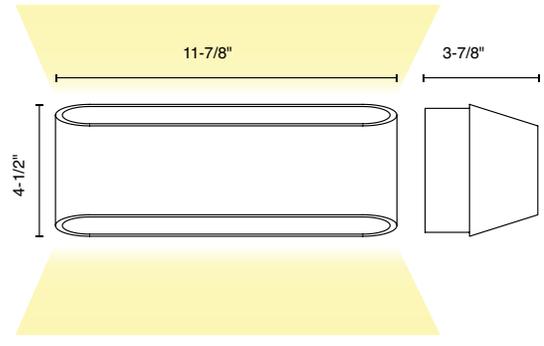

**DESCRIPTION**

Eclipse 2 is a direct-indirect LED sconce made of extruded aluminum. Its contemporary organic design allows for a modern look with a warm classic glow illuminating the wall from either side of its elliptical body. Eclipse 2 includes an onboard driver. It can be easily surface mounted vertically or horizontally and can cover a standard junction box. It is offered in brushed chrome exterior housing with white inner reflector, white exterior housing with white inner reflector, or black exterior housing with gold inner reflector.

**HOUSING**

- Extruded aluminum housing with white, black/gold, or brushed chrome/white finish

**MOUNTING**

- Mount to 3-1/2" to 4" octagonal or 4" square recessed junction box.

**ELECTRICAL/CONTROLS**

- 120-277Vac, 50/60Hz input, 17W  
 - Trailing Edge (ELV) dimming at 120Vac to 5%

**LED INFO**

- LED: Zigen ZGIBGX30KHO  
 - CCT: 3000K  
 - CRI: 93 typ  
 - SDCM: 3-step MacAdam Ellipse  
 - Delivered Lumens: 1240 lm  
 - Lumen Maintenance:  $L_{70} > 50,000$  hrs  
 - Warranty: 5 year limited warranty

**LISTINGS**

- ETLus Listed to UL1598 (suitable for dry location only)  
 - cETL Listed to CSA C22.2 #250.0  
 - ADA Compliant