

IP65 : Suitable for Wet Locations  
 IK10 : Impact Resistant (Vandal Resistant)

## UTA-20719 Tango 14 single post top HP LED

Tango post top luminaire was developed to compliment the Tango and Jet range of wall mount luminaires as well as the Jet square bollards, using energy saving compact fluorescent, metal halide and high pressure sodium lamps. This rectangular profiled luminaire mounted on a square extruded aluminum pole is available with different reflectors, downward light beam distributions and lamp options. Designed for residential and shopping areas, squares and parks. Available with a selection of integral electronic ballasts.

Low copper content die-cast aluminum housing and aluminum bottom frame with integral anti-glare baffles. Stainless steel screws. Durable silicone rubber gasket and clear toughened glass lens. Single cable entry. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral control gear. Anodized high purity aluminum reflector.

### Physical Data

Length: 14.9"  
 Height: 10.86"  
 Weight: 44.9 lb

### Lamp

40w - 2750lm - White - LED ☉

### Beam Angle (Please Specify)

N - Narrow Beam - 14°  
 M - Medium Beam - 25°  
 W - Wide Beam - 40°

### LED Color (Please Specify)

W27 - 2700K  
 W30 - 3000K  
 W40 - 4000K

### Voltage (Please Specify)

120V  
 277V  
 Other \_\_\_\_\_





### Color (Please Specify)

01-Black - RAL 9011                       02- Dark Grey - RAL 7043  
 03-White - RAL 9003                       04 - Metallic Silver - RAL 9006  
 05-Matt Silver - RAL 9006               07- Custom - RAL \_\_\_\_\_  
 06-Bronze - RAL 6014



### Lens

F - Frosted Lens  
 C - Clear Lens  
 HGT - Specify Custom Height \_\_\_\_\_ ft

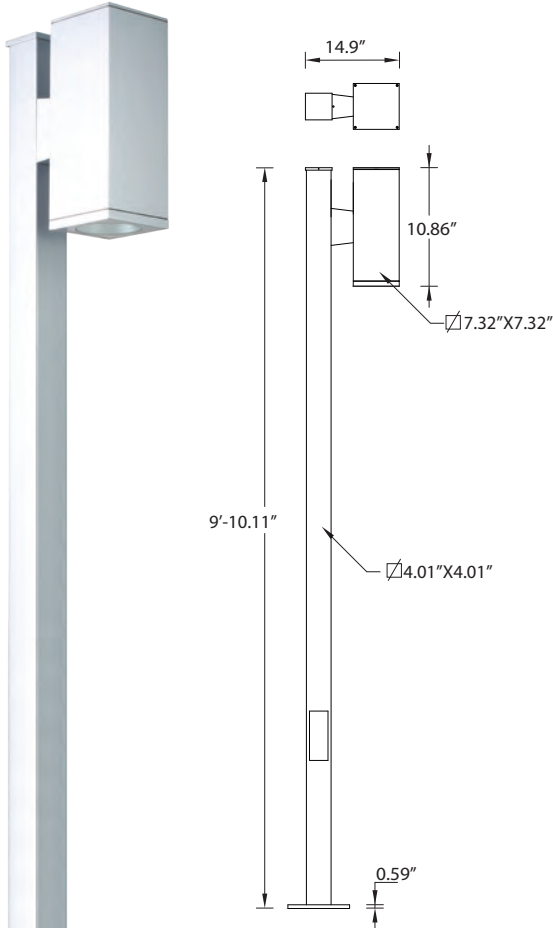

Ordering Example : UTA - 20719- White - 40w - N - W30 - 120v - Options

PROJECT: \_\_\_\_\_ DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_ NOTE: \_\_\_\_\_

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information. Due to the continual improvements in LED technology data and components may change without notice.