

DB5 – Decorative Pole

TYPE

4" ROUND (RD) & FLUTED (FL) DECORATIVE BASE



DB5

1. BASE	2. POLE	3. OAH	4. COLOR	5. OPTIONS/ACCESSORIES				

1. BASE	2. POLE	3. OAH	SHAFT	WT	MAXIMUM ALLOWABLE EPA (MPH)									
					85	90	100	110	120	130	140	150		
DB5	4R10-125	10' (3.1m)	4" RD x .125"	40	12.9	11.4	9.0	7.2	5.9	4.9	4.2	3.7		
DB5	4R12-125	12' (3.7m)	4" RD x .125"	44	10.2	8.9	7.0	5.5	4.5	3.7	3.1	2.7		
DB5	4R14-125	14' (4.3m)	4" RD x .125"	48	8.2	7.1	5.5	4.2	3.3	2.7	2.3	1.9		
DB5	4R16-125	16' (4.9m)	4" RD x .125"	51	6.7	5.7	4.3	3.2	2.4	1.9	1.6	1.3		
DB5	4R10-226	10' (3.1m)	4" RD x .226"	53	15.9	14.0	11.1	9.0	7.4	6.2	5.3	4.6		
DB5	4R12-226	12' (3.7m)	4" RD x .226"	59	12.8	11.3	8.9	7.1	5.7	4.8	4.1	3.5		
DB5	4R14-226	14' (4.3m)	4" RD x .226"	65	10.6	9.3	7.2	5.6	4.5	3.7	3.1	2.7		
DB5	4R16-226	16' (4.9m)	4" RD x .226"	71	8.3	8.2	6.3	4.9	3.8	3.1	2.7	2.2		
DB5	4F10-188	10' (3.1m)	4" FL x .188"	48	14.7	13.0	10.3	8.3	6.8	5.7	4.7	4.1		
DB5	4F12-188	12' (3.7m)	4" FL x .188"	53	11.7	10.3	8.1	6.4	5.1	4.3	3.5	2.9		
DB5	4F14-188	14' (4.3m)	4" FL x .188"	59	9.5	8.3	6.4	5.0	3.9	3.2	2.6	2.1		
DB5	4F16-188	16' (4.9m)	4" FL x .188"	64	7.8	6.7	5.1	3.9	2.9	2.3	1.8	1.5		

Note: Overall height is measured to top of pole.

SPECIFICATIONS

Base shall be cast aluminum #356 alloy, free of any porosity, foreign materials, or cosmetic fillers. Base casting shall be heat treated to a T-6 condition, and of uniform wall thickness, with no warping or mold shifting.

WARNINGS

Caution must be exercised in the selection of a design wind speed when the pole is to be installed in a special wind region (as indicated by the wind map) or in an area where wind speed is unpredictable.

AAL recommends consulting a local engineer when the pole is to be installed in an area that may be subject to extreme weather and exposure.

Poles installed on structures such as buildings and bridges may be subjected to vibration, oscillations, and other fatigue effects which are not covered by the AAL warranty.

The use of banners or other appendages can severely affect the loading of a pole. No banner or other appendage should be attached to an AAL pole unless approved by AAL.

If the products are to be used on an existing foundation or on other structures, the customer assumes all responsibility for the structural integrity of the existing foundation, anchorage or structures and all the consequences arising therefrom.

CAUTION

Poles should never be erected without the luminaire installed.

Anchor bolts shall be hot dip galvanized steel. Six galvanized hex nuts and flat washers, and a bolt circle template shall be provided. Anchor bolt for poles are 3/4" x 24" x 3".

CERTIFICATION

Certified UL 1598 in accordance with Article 410 of ANSI/NFPA 70, National Electrical Code.

2. COLOR

Standard Color

WH	Arctic White
BL	Black
BLT	Matte Black
DB	Dark Bronze
DGN	Dark Green
TT	Titanium
WDB	Weathered Bronze
MDB	Bronze Metallic
VBU	Verde Blue
CRT	Corten
MAL	Matte Aluminum
MG	Medium Grey
AGN	Antique Green
LG	Light Grey

Premium Color

SHK	Shamrock
SPP	Salt and Pepper
SFM	Seafoam
WCP	Weathered Copper
RAL	RAL 4 digit Color
CUSTOM	Custom Color

3. OPTIONS / ACCESSORIES

- FH (Flag holder. Specify location on pole)
- FS1 (Single weatherproof fuse holder. Fuse by others.)
- FS2 (Double weatherproof fuse holder. Fuse by others.)
- LR (Ladder rest. Slips over a 4" O.D. pole.)
- PCA-T (Rotatable photocell housing. The housing slips over a 4"/100mm O.D. pole. A fixture slips over the 4"/100mm O.D. tenon. Includes an internal twist lock receptacle, and an access cover with integral lens and stainless steel tether. Adds 5"/125mm to the overall height of the pole/fixture assembly. Prewired on the load side and line side for easy installation. Photocell by others.)
- PCR (Low profile twist lock photocell receptacle with cast pole cap top. Secures to the top of the pole with three stainless steel set screws. Photocell by others.)
- PLT (Plant Hanger. For 4" O.D. poles. (specify location on pole)
- RBC (Cast aluminum receptacle housing, integrally welded to the pole. Includes a NEC approved clear weatherproof cover. Does not include a receptacle or internal wiring.)





ARCHITECTURAL AREA LIGHTING
 16555 East Gale Ave. | City of Industry | CA 91745
 P 626.968.5666 | F 626.369.2695 | www.aal.net
 Copyright © 2012 | REV 6.12


JOB _____
 TYPE _____
 NOTES _____

4" ROUND (RD) & FLUTED (FL) DECORATIVE BASE


DIMENSIONS

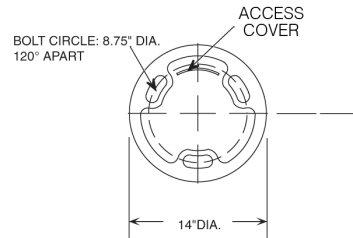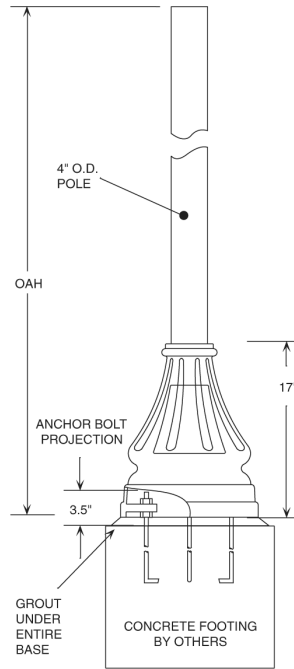

BOTTOM VIEW
(INDICATES POLE IS LAYING DOWN WITH ACCESS COVER FACING UP)



SINGLE FIXTURE MOUNTING ORIENTATION
BOTTOM VIEW
(INDICATES POLE IS LAYING DOWN WITH ACCESS COVER FACING UP)



DOUBLE FIXTURE MOUNTING ORIENTATION
BOTTOM VIEW
(INDICATES POLE IS LAYING DOWN WITH ACCESS COVER FACING UP)